

A dark, minimalist interior space. A bright white light strip runs diagonally across the top of the frame, following the edge of the ceiling. Another vertical light strip is visible on the left side, illuminating a portion of the wall. The overall atmosphere is modern and dramatic, with high contrast between the dark surfaces and the bright light.

MASTERLIGHTING

MP Profile Linear







MP Masterlighting Profiles are a minimalistic profile design,
with the ability to fit any project.

They can be installed either ceiling, pendant, wall lamp,
recessed, trimless and up-down.

Profile - MP61.70

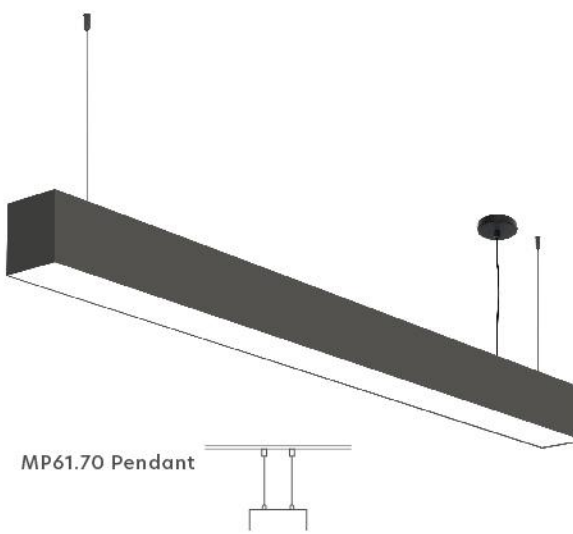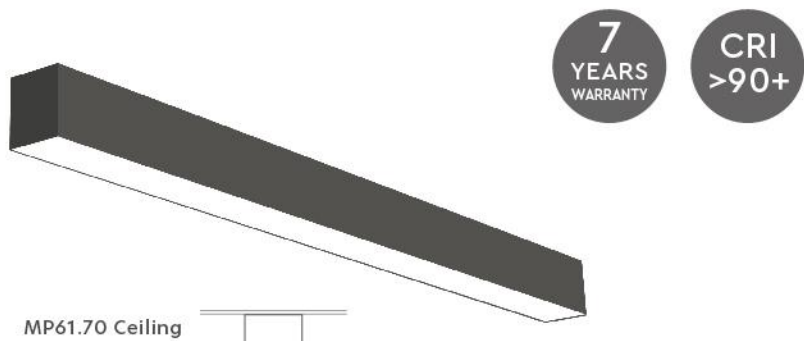

MP61.70 Pendant or Ceiling

Is a led profile luminaire, body of aluminum, painted with electrostatic paint with a matte finish. Designed for ceiling or pendant mounting, providing direct light through an opal diffuser or honeycomb. Luminaire equipped with the best quality Samsung led chips 200Lm/W and KGP drivers.

MP61.70 Κρεμαστό ή Οροφής

Είναι φωτιστικό προφίλ led, σώμα από αλουμίνιο, βαμμένο με ηλεκτροστατική βαφή με ματ φινιρίσμα. Σχεδιασμένο για τοποθέτηση σε οροφή ή κρεμαστό, παρέχοντας άμεσο φωτισμό μέσω της opal διάχυσης ή κηρήθρας. Φωτιστικό εξοπλισμένο με την καλύτερη ποιότητα. Προγράμματα οδήγησης Samsung led chips 200Lm/W και KGP.

Main Features




Characteristics and Advantages

- Available from 59cm to 451cm
- Opal diffuser UGR<22 or Honeycomb UGR<15
- Beam Angle (Opal 120°, Honeycomb 30°)
- Three types of driver (ON-OFF, DALI, TRIAC with the ability TUYA)
- Coming in White, Black, Grey or optionally Special Ral
- Included 1,5m wire adjustable suspension. Request for 3m or 5m
- Low operating temperature due to excellent heat induction
- Excellent performance with low power consumption

Χαρακτηριστικά και Πλεονεκτήματα

- Διατίθεται από 59cm έως 451cm
- Διαχυτής Opal UGR<22 ή Κυψέλης UGR<15
- Γωνία δέσμης (Opal 120°, Κυψέλης 30°)
- Τρεις τύποι μετασχηματιστών (ON-OFF, DALI, TRIAC με δυνατότητα TUYA)
- Διατίθεται σε λευκό, μαύρο, γκρι ή προαιρετικά Special Ral
- Περιλαμβάνεται συρμάτινη ρυθμιζόμενη ανάρτηση 1,5m. Αίτημα για 3m ή 5m.
- Χαμηλή θερμοκρασία λειτουργίας λόγω εξαιρετικής επαγωγής θερμότητας
- Εξαιρετική απόδοση με χαμηλή κατανάλωση ενέργειας

All the hanging and ceiling metal safety accessories are included.

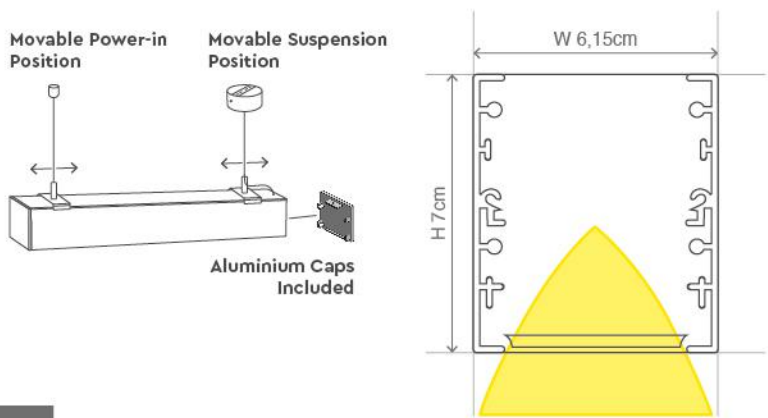

| MASTER PROFILES | | | | | | | |
|-----------------|---------------|--------------|--------------|-----------|-----------|--------------|--------------|
| Length cm | Standart Watt | | | Length cm | High Watt | | |
| | Watt | Lumen 3.000K | Lumen 4.000K | | Watt | Lumen 3.000K | Lumen 4.000K |
| 59 | 12,6 | 1880 | 1900 | 59 | 21,6 | 3100 | 3120 |
| 87 | 18,9 | 2820 | 2850 | 87 | 32,4 | 4650 | 4680 |
| 115 | 25,2 | 3760 | 3800 | 115 | 43,2 | 6200 | 6240 |
| 143 | 31,5 | 4700 | 4750 | 143 | 54 | 7750 | 7800 |
| 171 | 37,8 | 5640 | 5700 | 171 | 64,8 | 9300 | 9360 |
| 199 | 44,1 | 6580 | 6650 | 199 | 75,6 | 10850 | 10920 |
| 227 | 50,4 | 7520 | 7600 | 227 | 86,4 | 12400 | 12480 |
| 255 | 56,7 | 8460 | 8550 | 255 | 97,2 | 13950 | 14040 |
| 283 | 63 | 9400 | 9500 | 283 | 108 | 15500 | 15600 |
| 311 | 69,3 | 10340 | 10450 | 311 | 118,8 | 17050 | 17160 |
| 339 | 75,6 | 11280 | 11400 | 339 | 129,6 | 18600 | 18720 |
| 367 | 81,9 | 12220 | 12350 | 367 | 140,4 | 20150 | 20280 |
| 395 | 88,2 | 13160 | 13300 | 395 | 151,2 | 21700 | 21840 |
| 423 | 94,5 | 14100 | 14250 | 423 | 162 | 23250 | 23400 |
| 451 | 100,8 | 15040 | 15200 | 451 | 172,8 | 24800 | 24960 |



Build your own code:

Your Code: MP61.70

Example Code:

MP61.70**P**-**059**-**S**-**3**-**O**-**OF**-**WH**

| Structure | Length | Watt Power | Kelvin | Optic Diffuser | Driver | Body Color |
|-----------|--------|------------|--------|----------------|--------|------------|
| P | 059 | S | 3 | O | OF | WH |
| Structure | Length | Watt Power | Kelvin | Optic Diffuser | Driver | Body Color |



Opal Diffuser

Choose Technical Configurations

| Structure | Length | Watt Power | Kelvin | Optic Diffuser | Driver | Body Color |
|--|--|--|--|--|---|---|
| C = Ceiling P = Pendant | 059 = 59 087 = 87 115 = 115 143 = 143 171 = 171 199 = 199 227 = 227 255 = 255 283 = 283 311 = 311 339 = 339 367 = 367 395 = 395 423 = 423 451 = 451 | S = Standart H = High | 3 = 3.000K 4 = 4.000K | O = Opal Diffuser MP = Honeycomb Diffuser | OF = ON-OFF D = Dali T = Triac | WH = White BL = Black GR = Grey SR = Special Ral |





Honeycomb Diffuser



TUYA SWITCH
77-50498-40
Only with Triac Driver

*You can only choose from the choices above

MP61.70 Ceiling

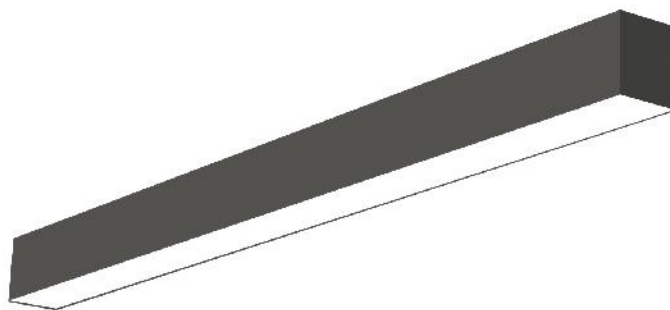

MP61.70 CEILING BLACK

STANDART WATT

| Length (cm) | Code On/off | Description Code | Watt | Lumen | On/off | Triac | Dali |
|-------------|--------------|--------------------------|-------|-------|--------|-------|------|
| 59 | 77-9274-64 | MP61.70C-059-S-3-O-OF-BL | 12,6 | 1880 | 64 | 70 | 96 |
| 87 | 77-9370-80 | MP61.70C-087-S-3-O-OF-BL | 18,9 | 2820 | 80 | 86 | 114 |
| 115 | 77-9466-92 | MP61.70C-115-S-3-O-OF-BL | 25,2 | 3760 | 92 | 104 | 120 |
| 143 | 77-9562-106 | MP61.70C-143-S-3-O-OF-BL | 31,5 | 4700 | 106 | 124 | 140 |
| 171 | 77-9658-122 | MP61.70C-171-S-3-O-OF-BL | 37,8 | 5640 | 122 | 134 | 152 |
| 199 | 77-9754-136 | MP61.70C-199-S-3-O-OF-BL | 44,1 | 6580 | 136 | 154 | 170 |
| 227 | 77-9850-150 | MP61.70C-227-S-3-O-OF-BL | 50,4 | 7520 | 150 | 176 | 182 |
| 255 | 77-9946-164 | MP61.70C-255-S-3-O-OF-BL | 56,7 | 8460 | 164 | 182 | 204 |
| 283 | 77-10042-170 | MP61.70C-283-S-3-O-OF-BL | 63 | 9400 | 170 | 188 | 218 |
| 311 | 77-10138-194 | MP61.70C-311-S-3-O-OF-BL | 69,3 | 10340 | 194 | 218 | 236 |
| 339 | 77-10234-214 | MP61.70C-339-S-3-O-OF-BL | 75,6 | 11280 | 214 | 238 | 268 |
| 367 | 77-10330-228 | MP61.70C-367-S-3-O-OF-BL | 81,9 | 12220 | 228 | 252 | 286 |
| 395 | 77-10426-248 | MP61.70C-395-S-3-O-OF-BL | 88,2 | 13160 | 248 | 278 | 306 |
| 423 | 77-10522-262 | MP61.70C-423-S-3-O-OF-BL | 94,5 | 14100 | 262 | 292 | 328 |
| 451 | 77-10618-280 | MP61.70C-451-S-3-O-OF-BL | 100,8 | 15040 | 280 | 310 | 348 |

HIGH WATT

| Length (cm) | Code On/off | Description Code | Watt | Lumen | On/off | Triac | Dali |
|-------------|--------------|--------------------------|-------|-------|--------|-------|------|
| 59 | 77-9278-70 | MP61.70C-059-H-3-O-OF-BL | 21,6 | 3100 | 70 | 76 | 96 |
| 87 | 77-9374-86 | MP61.70C-087-H-3-O-OF-BL | 32,4 | 4650 | 86 | 98 | 114 |
| 115 | 77-9470-98 | MP61.70C-115-H-3-O-OF-BL | 43,2 | 6200 | 98 | 110 | 124 |
| 143 | 77-9566-112 | MP61.70C-143-H-3-O-OF-BL | 54 | 7750 | 112 | 130 | 146 |
| 171 | 77-9662-140 | MP61.70C-171-H-3-O-OF-BL | 64,8 | 9300 | 140 | 158 | 164 |
| 199 | 77-9758-154 | MP61.70C-199-H-3-O-OF-BL | 75,6 | 10850 | 154 | 172 | 178 |
| 227 | 77-9854-164 | MP61.70C-227-H-3-O-OF-BL | 86,4 | 12400 | 164 | 182 | 188 |
| 255 | 77-9950-180 | MP61.70C-255-H-3-O-OF-BL | 97,2 | 13950 | 180 | 198 | 234 |
| 283 | 77-10046-192 | MP61.70C-283-H-3-O-OF-BL | 108 | 15500 | 192 | 222 | 254 |
| 311 | 77-10141-210 | MP61.70C-311-H-3-O-OF-BL | 118,8 | 17050 | 210 | 246 | 272 |
| 339 | 77-10238-222 | MP61.70C-339-H-3-O-OF-BL | 129,6 | 18600 | 222 | 258 | 290 |
| 367 | 77-10334-262 | MP61.70C-367-H-3-O-OF-BL | 140,4 | 20150 | 262 | 304 | 324 |
| 395 | 77-10430-276 | MP61.70C-395-H-3-O-OF-BL | 151,2 | 21700 | 276 | 324 | 360 |
| 423 | 77-10526-290 | MP61.70C-423-H-3-O-OF-BL | 162 | 23250 | 290 | 338 | 404 |
| 451 | 77-10622-310 | MP61.70C-451-H-3-O-OF-BL | 172,8 | 24800 | 310 | 364 | 430 |

Ability to select Kelvin, changing the **3** (3000K) to **4** (4000K), if you wish your lighting to be 4000k than 3000k.
 Ability to select between Opal or Honeycomb, changing the **O** (OPAL) to **MP** (HONEYCOMB), according to your desire.
 Ability to select Driver Triac or Dali, changing the **OF** (ON/OFF) to **T** (TRIAC) or **D** (DALI), according to your desire of Driver.
 Ability to select Color, changing the **BL** (BLACK) to **WH** (WHITE), **GR** (GREY) or **SR** (SPECIAL RAL), according to your desire.

Price Catalogue Explanation


For Honeycomb from length 059-115 extra 6€ to the price catalogue, from 143-227 extra 12€, from 255-339 extra 18€ and from 367-451 extra 24€. For Drivers the prices are on the list. For Special Ral extra 10% to the price catalogue.

To build your personal code you can visit our site www.masterlighting.gr or you can go to the previous page....

The price catalogue as well as the code 77-XXXX-XXX varies according to your options.

Included all the ceiling accessories.

MP61.70 Pendant



MP61.70 PENDANT WHITE

STANDART WATT

| Length (cm) | Code On/off | Description Code | Watt | Lumen | On/off | Triac | Dali |
|-------------|--------------|---------------------------|-------|-------|--------|-------|------|
| 59 | 77-16853-68 | MP61.70P-059-S-3-O-OFF-WH | 12,6 | 1880 | 68 | 74 | 100 |
| 87 | 77-16949-84 | MP61.70P-087-S-3-O-OFF-WH | 18,9 | 2820 | 84 | 90 | 118 |
| 115 | 77-17045-96 | MP61.70P-115-S-3-O-OFF-WH | 25,2 | 3760 | 96 | 108 | 124 |
| 143 | 77-17141-110 | MP61.70P-143-S-3-O-OFF-WH | 31,5 | 4700 | 110 | 122 | 138 |
| 171 | 77-17237-126 | MP61.70P-171-S-3-O-OFF-WH | 37,8 | 5640 | 126 | 138 | 156 |
| 199 | 77-17333-140 | MP61.70P-199-S-3-O-OFF-WH | 44,1 | 6580 | 140 | 158 | 174 |
| 227 | 77-17429-154 | MP61.70P-227-S-3-O-OFF-WH | 50,4 | 7520 | 154 | 172 | 186 |
| 255 | 77-17526-168 | MP61.70P-255-S-3-O-OFF-WH | 56,7 | 8460 | 168 | 186 | 208 |
| 283 | 77-17622-172 | MP61.70P-283-S-3-O-OFF-WH | 63 | 9400 | 172 | 190 | 222 |
| 311 | 77-17718-198 | MP61.70P-311-S-3-O-OFF-WH | 69,3 | 10340 | 198 | 222 | 240 |
| 339 | 77-17814-218 | MP61.70P-339-S-3-O-OFF-WH | 75,6 | 11280 | 218 | 242 | 272 |
| 367 | 77-17910-232 | MP61.70P-367-S-3-O-OFF-WH | 81,9 | 12220 | 232 | 256 | 290 |
| 395 | 77-18006-252 | MP61.70P-395-S-3-O-OFF-WH | 88,2 | 13160 | 252 | 282 | 310 |
| 423 | 77-18102-266 | MP61.70P-423-S-3-O-OFF-WH | 94,5 | 14100 | 266 | 312 | 332 |
| 451 | 77-18198-284 | MP61.70P-451-S-3-O-OFF-WH | 100,8 | 15040 | 284 | 314 | 352 |

HIGH WATT

| Length (cm) | Code On/off | Description Code | Watt | Lumen | On/off | Triac | Dali |
|-------------|--------------|---------------------------|-------|-------|--------|-------|------|
| 59 | 77-16857-74 | MP61.70P-059-H-3-O-OFF-WH | 12,6 | 3100 | 74 | 80 | 100 |
| 87 | 77-16953-90 | MP61.70P-087-H-3-O-OFF-WH | 18,9 | 4650 | 90 | 102 | 118 |
| 115 | 77-17049-102 | MP61.70P-115-H-3-O-OFF-WH | 25,2 | 6200 | 102 | 114 | 128 |
| 143 | 77-17145-116 | MP61.70P-143-H-3-O-OFF-WH | 31,5 | 7750 | 116 | 134 | 144 |
| 171 | 77-17241-144 | MP61.70P-171-H-3-O-OFF-WH | 37,8 | 9300 | 144 | 162 | 168 |
| 199 | 77-17337-158 | MP61.70P-199-H-3-O-OFF-WH | 44,1 | 10850 | 158 | 182 | 182 |
| 227 | 77-17433-168 | MP61.70P-227-H-3-O-OFF-WH | 50,4 | 12400 | 168 | 192 | 192 |
| 255 | 77-17530-184 | MP61.70P-255-H-3-O-OFF-WH | 56,7 | 13950 | 184 | 214 | 238 |
| 283 | 77-17626-196 | MP61.70P-283-H-3-O-OFF-WH | 63 | 15500 | 196 | 226 | 258 |
| 311 | 77-17722-214 | MP61.70P-311-H-3-O-OFF-WH | 69,3 | 17050 | 214 | 250 | 276 |
| 339 | 77-17818-226 | MP61.70P-339-H-3-O-OFF-WH | 75,6 | 18600 | 226 | 262 | 294 |
| 367 | 77-17914-266 | MP61.70P-367-H-3-O-OFF-WH | 81,9 | 20150 | 266 | 308 | 330 |
| 395 | 77-18010-280 | MP61.70P-395-H-3-O-OFF-WH | 88,2 | 21700 | 280 | 328 | 360 |
| 423 | 77-18106-294 | MP61.70P-423-H-3-O-OFF-WH | 94,5 | 23250 | 294 | 342 | 380 |
| 451 | 77-18202-314 | MP61.70P-451-H-3-O-OFF-WH | 100,8 | 24800 | 314 | 368 | 410 |

Δυνατότητα επιλογής Kelvin, αλλάζοντας το **3** (3000K) σε **4** (4000K), εάν επιθυμείτε ο φωτισμός σας να είναι 4000K αντί για 3000K.
 Δυνατότητα επιλογής μεταξύ Opal ή Κυψέλης, αλλάζοντας το **O** (OPAL) σε **MP** (HONEYCOMB), σύμφωνα με την επιθυμία σας.
 Δυνατότητα επιλογής μετασχηματιστή Triac ή Dali, αλλάζοντας το **OF** (ON/OFF) σε **T** (TRIAC) ή **D** (DALI), σύμφωνα με την επιλογή σας.
 Δυνατότητα επιλογής χρώματος, αλλάζοντας το **BL** (Μαύρο) σε **WH** (Άσπρο), **GR** (Γκρι) ή **SR** (Special Ral).

Επεξήγηση Τιμοκαταλόγων



Για Κυψέλη από μήκος 059-115 επιπλέον 6€ στην τιμή καταλόγου, από μήκος 143-227 επιπλέον 12€, από μήκος 255-339 επιπλέον 18€ και από μήκος 367-451 επιπλέον 24€ στην τιμή καταλόγου. Για τους μετασχηματιστές οι τιμές βρίσκονται στη λίστα παραπάνω. Για Special Ral επιπλέον 10% στην τιμή καταλόγου.

Για να δημιουργήσετε τον προσωπικό σας κωδικό μπορείτε να επισκεφτείτε το site μας www.masterlighting.gr ή μπορείτε να πάτε στην προηγούμενη σελίδα...

Η τιμή καταλόγου καθώς και ο κωδικός 77-XXXXX-XXX διαφέρει ανάλογα με τις επιλογές σας.

Περιλαμβάνονται όλα τα εξαρτήματα ανάρτησης.

Profile - MP61.56

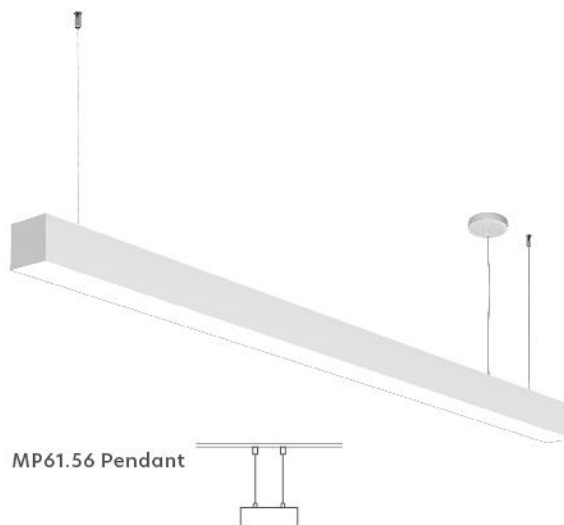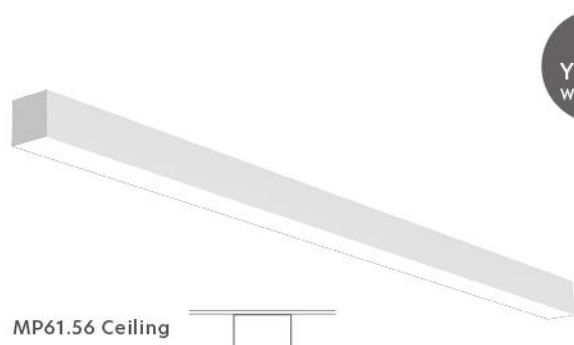

MP61.56 Pendant or Ceiling

Is a led profile luminaire, body of aluminum, painted with electrostatic paint with a matte finish. Designed for ceiling or pendant mounting, providing direct light through an opal diffuser or honeycomb. Luminaire equipped with the best quality Samsung led chips 200Lm/W and KGP drivers.

MP61.56 Κρεμαστό ή Οροφής

Είναι φωτιστικό προφίλ led, σώμα από αλουμίνιο, βαμμένο με ηλεκτροστατική βαφή με ματ φινίρισμα. Σχεδιασμένο για τοποθέτηση σε οροφή ή κρεμαστό, παρέχοντας άμεσο φωτισμό μέσω της opal διάχυσης ή κηρήθρας. Φωτιστικό εξοπλισμένο με την καλύτερη ποιότητα. Προγράμματα οδήγησης Samsung led chips 200Lm/W και KGP.

Main Features

● Black ● White ● Grey ● Special Ral



Characteristics and Advantages

- Available from 59cm to 451cm
- Opal diffuser UGR<22 or Honeycomb UGR<15
- Beam Angle (Opal 120°, Honeycomb 30°)
- Three types of driver (ON-OFF, DALI, TRIAC with the ability TUYA)
- Coming in White, Black, Grey or optionally Special Ral
- Included 1,5m wire adjustable suspension. Request for 3m or 5m
- Low operating temperature due to excellent heat induction
- Excellent performance with low power consumption

Χαρακτηριστικά και Πλεονεκτήματα

- Διατίθεται από 59cm έως 451cm
- Διαχυτής Opal UGR<22 ή Κυψέλης UGR<15
- Γωνία δέσμης (Opal 120°, Κυψέλης 30°)
- Τρεις τύποι μετασχηματιστών (ON-OFF, DALI, TRIAC με δυνατότητα TUYA)
- Διατίθεται σε λευκό, μαύρο, γκρι ή προαιρετικά Special Ral
- Περιλαμβάνεται συρμάτινη ρυθμιζόμενη ανάρτηση 1,5m. Αίτημα για 3m ή 5m.
- Χαμηλή θερμοκρασία λειτουργίας λόγω εξαιρετικής επαγωγής θερμότητας
- Εξαιρετική απόδοση με χαμηλή κατανάλωση ενέργειας

All the hanging and ceiling metal safety accessories are included.

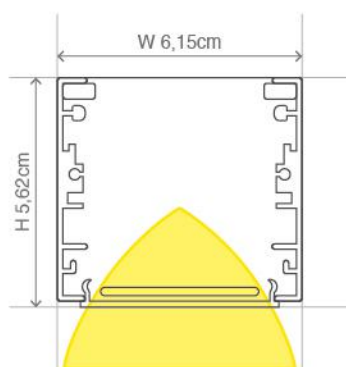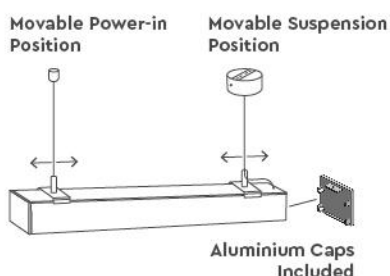

| MASTER PROFILES | | | | | | | |
|-----------------|---------------|--------------|--------------|-----------|-----------|--------------|--------------|
| Length cm | Standart Watt | | | Length cm | High Watt | | |
| | Watt | Lumen 3.000K | Lumen 4.000K | | Watt | Lumen 3.000K | Lumen 4.000K |
| 59 | 12,6 | 1880 | 1900 | 59 | 21,6 | 3100 | 3120 |
| 87 | 18,9 | 2820 | 2850 | 87 | 32,4 | 4650 | 4680 |
| 115 | 25,2 | 3760 | 3800 | 115 | 43,2 | 6200 | 6240 |
| 143 | 31,5 | 4700 | 4750 | 143 | 54 | 7750 | 7800 |
| 171 | 37,8 | 5640 | 5700 | 171 | 64,8 | 9300 | 9360 |
| 199 | 44,1 | 6580 | 6650 | 199 | 75,6 | 10850 | 10920 |
| 227 | 50,4 | 7520 | 7600 | 227 | 86,4 | 12400 | 12480 |
| 255 | 56,7 | 8460 | 8550 | 255 | 97,2 | 13950 | 14040 |
| 283 | 63 | 9400 | 9500 | 283 | 108 | 15500 | 15600 |
| 311 | 69,3 | 10340 | 10450 | 311 | 118,8 | 17050 | 17160 |
| 339 | 75,6 | 11280 | 11400 | 339 | 129,6 | 18600 | 18720 |
| 367 | 81,9 | 12220 | 12350 | 367 | 140,4 | 20150 | 20280 |
| 395 | 88,2 | 13160 | 13300 | 395 | 151,2 | 21700 | 21840 |
| 423 | 94,5 | 14100 | 14250 | 423 | 162 | 23250 | 23400 |
| 451 | 100,8 | 15040 | 15200 | 451 | 172,8 | 24800 | 24960 |



Build your own code:

Your Code: MP61.56

Example Code:

MP61.56P-143-H-4-O-T-WH

| Structure | Length | Watt Power | Kelvin | Optic Diffuser | Driver | Body Color |
|-----------|--------|------------|--------|----------------|--------|------------|
| P | 143 | H | 4 | O | T | WH |
| Structure | Length | Watt Power | Kelvin | Optic Diffuser | Driver | Body Color |



Opal Diffuser

Choose Technical Configurations

| Structure | Length | Watt Power | Kelvin | Optic Diffuser | Driver | Body Color |
|----------------------------|---|--------------------------|--------------------------|--|--------------------------------------|---|
| C = Ceiling P = Pendant | 059 = 59 087 = 87 115 = 115 143 = 143 171 = 171 199 = 199 227 = 227 255 = 255 283 = 283 311 = 311 339 = 339 367 = 367 395 = 395 423 = 423 451 = 451 | S = Standart H = High | 3 = 3.000K 4 = 4.000K | O = Opal Diffuser MP = Honeycomb Diffuser | OF = ON-OFF D = Dali T = Triac | WH = White BL = Black GR = Grey SR = Special Ral |





Honeycomb Diffuser



TUYA SWITCH
77-50498-40
Only with Triac Driver

*You can only choose from the choices above

MP61.56 Ceiling

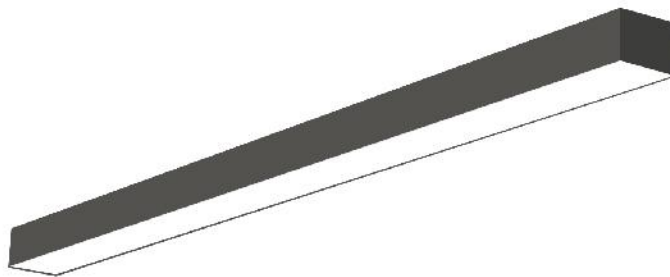

MP61.56 CEILING BLACK

STANDART WATT

| Length (cm) | Code On/off | Description Code | Watt | Lumen | On/off | Triac | Dali |
|-------------|--------------|--------------------------|-------|-------|--------|-------|------|
| 59 | 77-10714-60 | MP61.56C-059-S-3-O-OF-BL | 12,6 | 1880 | 60 | 66 | 90 |
| 87 | 77-10810-70 | MP61.56C-087-S-3-O-OF-BL | 18,9 | 2820 | 70 | 76 | 102 |
| 115 | 77-10906-82 | MP61.56C-115-S-3-O-OF-BL | 25,2 | 3760 | 82 | 94 | 108 |
| 143 | 77-11002-92 | MP61.56C-143-S-3-O-OF-BL | 31,5 | 4700 | 92 | 104 | 120 |
| 171 | 77-11098-108 | MP61.56C-171-S-3-O-OF-BL | 37,8 | 5640 | 108 | 114 | 136 |
| 199 | 77-11194-118 | MP61.56C-199-S-3-O-OF-BL | 44,1 | 6580 | 118 | 136 | 150 |
| 227 | 77-11290-132 | MP61.56C-227-S-3-O-OF-BL | 50,4 | 7520 | 132 | 150 | 162 |
| 255 | 77-11386-140 | MP61.56C-255-S-3-O-OF-BL | 56,7 | 8460 | 140 | 158 | 178 |
| 283 | 77-11482-150 | MP61.56C-283-S-3-O-OF-BL | 63 | 9400 | 150 | 168 | 188 |
| 311 | 77-11578-164 | MP61.56C-311-S-3-O-OF-BL | 69,3 | 10340 | 164 | 188 | 204 |
| 339 | 77-11674-180 | MP61.56C-339-S-3-O-OF-BL | 75,6 | 11280 | 180 | 204 | 234 |
| 367 | 77-11770-190 | MP61.56C-367-S-3-O-OF-BL | 81,9 | 12220 | 190 | 214 | 246 |
| 395 | 77-11866-202 | MP61.56C-395-S-3-O-OF-BL | 88,2 | 13160 | 202 | 232 | 258 |
| 423 | 77-11962-208 | MP61.56C-423-S-3-O-OF-BL | 94,5 | 14100 | 208 | 238 | 274 |
| 451 | 77-12058-224 | MP61.56C-451-S-3-O-OF-BL | 100,8 | 15040 | 224 | 254 | 284 |

HIGH WATT

| Length (cm) | Code On/off | Description Code | Watt | Lumen | On/off | Triac | Dali |
|-------------|--------------|--------------------------|-------|-------|--------|-------|------|
| 59 | 77-10718-64 | MP61.56C-059-H-3-O-OF-BL | 21,6 | 3100 | 64 | 70 | 90 |
| 87 | 77-10814-78 | MP61.56C-087-H-3-O-OF-BL | 32,4 | 4650 | 78 | 90 | 102 |
| 115 | 77-10910-98 | MP61.56C-115-H-3-O-OF-BL | 43,2 | 6200 | 98 | 110 | 114 |
| 143 | 77-11006-104 | MP61.56C-143-H-3-O-OF-BL | 54 | 7750 | 104 | 122 | 124 |
| 171 | 77-11102-124 | MP61.56C-171-H-3-O-OF-BL | 64,8 | 9300 | 124 | 142 | 150 |
| 199 | 77-11198-136 | MP61.56C-199-H-3-O-OF-BL | 75,6 | 10850 | 136 | 160 | 160 |
| 227 | 77-11294-146 | MP61.56C-227-H-3-O-OF-BL | 86,4 | 12400 | 146 | 170 | 170 |
| 255 | 77-11390-156 | MP61.56C-255-H-3-O-OF-BL | 97,2 | 13950 | 156 | 186 | 208 |
| 283 | 77-11486-166 | MP61.56C-283-H-3-O-OF-BL | 108 | 15500 | 166 | 196 | 226 |
| 311 | 77-11582-182 | MP61.56C-311-H-3-O-OF-BL | 118,8 | 17050 | 182 | 218 | 244 |
| 339 | 77-11678-194 | MP61.56C-339-H-3-O-OF-BL | 129,6 | 18600 | 194 | 230 | 260 |
| 367 | 77-11774-228 | MP61.56C-367-H-3-O-OF-BL | 140,4 | 20150 | 228 | 270 | 274 |
| 395 | 77-11870-242 | MP61.56C-395-H-3-O-OF-BL | 151,2 | 21700 | 242 | 290 | 284 |
| 423 | 77-11966-252 | MP61.56C-423-H-3-O-OF-BL | 162 | 23250 | 252 | 300 | 298 |
| 451 | 77-12062-262 | MP61.56C-451-H-3-O-OF-BL | 172,8 | 24800 | 262 | 316 | 308 |

Ability to select Kelvin, changing the **3** (3000K) to **4** (4000K), if you wish your lighting to be 4000k than 3000k.
 Ability to select between Opal or Honeycomb, changing the **O** (OPAL) to **MP** (HONEYCOMB), according to your desire.
 Ability to select Driver Triac or Dali, changing the **OF** (ON/OFF) to **T** (TRIAC) or **D** (DALI), according to your desire of Driver.
 Ability to select Color, changing the **BL** (BLACK) to **WH** (WHITE), **GR** (GREY) or **SR** (SPECIAL RAL), according to your desire.

Price Catalogue Explanation


For Honeycomb from length 059-115 extra 6€ to the price catalogue, from 143-227 extra 12€, from 255-339 extra 18€ and from 367-451 extra 24€. For Drivers the prices are on the list. For Special Ral extra 10% to the price catalogue.

To build your personal code you can visit our site www.masterlighting.gr or you can go to the previous page....

The price catalogue as well as the code 77-XXXXX-XXX varies according to your options.

Included all the ceiling accessories.

MP61.56 Pendant



MP61.56 PENDANT WHITE

STANDART WATT

| Length (cm) | Code On/off | Description Code | Watt | Lumen | On/off | Triac | Dali |
|-------------|--------------|---------------------------|-------|-------|--------|-------|------|
| 59 | 77-18294-64 | MP61.56P-059-S-3-O-OFF-WH | 12,6 | 1900 | 64 | 70 | 94 |
| 87 | 77-18390-74 | MP61.56P-087-S-3-O-OFF-WH | 18,9 | 2820 | 74 | 80 | 106 |
| 115 | 77-18486-86 | MP61.56P-115-S-3-O-OFF-WH | 25,2 | 3800 | 86 | 98 | 112 |
| 143 | 77-18582-96 | MP61.56P-143-S-3-O-OFF-WH | 31,5 | 4700 | 96 | 108 | 124 |
| 171 | 77-18678-112 | MP61.56P-171-S-3-O-OFF-WH | 37,8 | 5640 | 112 | 124 | 140 |
| 199 | 77-18774-122 | MP61.56P-199-S-3-O-OFF-WH | 44,1 | 6580 | 122 | 140 | 152 |
| 227 | 77-18870-136 | MP61.56P-227-S-3-O-OFF-WH | 50,4 | 7520 | 136 | 154 | 166 |
| 255 | 77-18966-144 | MP61.56P-255-S-3-O-OFF-WH | 56,7 | 8460 | 144 | 162 | 182 |
| 283 | 77-19062-154 | MP61.56P-283-S-3-O-OFF-WH | 63 | 9400 | 154 | 172 | 192 |
| 311 | 77-19158-168 | MP61.56P-311-S-3-O-OFF-WH | 69,3 | 10340 | 168 | 192 | 208 |
| 339 | 77-19254-184 | MP61.56P-339-S-3-O-OFF-WH | 75,6 | 11280 | 184 | 208 | 234 |
| 367 | 77-19350-190 | MP61.56P-367-S-3-O-OFF-WH | 81,9 | 12220 | 194 | 218 | 250 |
| 395 | 77-19446-206 | MP61.56P-395-S-3-O-OFF-WH | 88,2 | 13300 | 206 | 236 | 262 |
| 423 | 77-19542-216 | MP61.56P-423-S-3-O-OFF-WH | 94,5 | 14100 | 216 | 246 | 278 |
| 451 | 77-19638-228 | MP61.56P-451-S-3-O-OFF-WH | 100,8 | 15040 | 228 | 258 | 288 |

HIGH WATT

| Length (cm) | Code On/off | Description Code | Watt | Lumen | On/off | Triac | Dali |
|-------------|--------------|---------------------------|-------|-------|--------|-------|------|
| 59 | 77-18298-68 | MP61.56P-059-H-3-O-OFF-WH | 21,6 | 3100 | 68 | 74 | 94 |
| 87 | 77-18390-74 | MP61.56P-087-H-3-O-OFF-WH | 32,4 | 4650 | 74 | 86 | 106 |
| 115 | 77-18490-102 | MP61.56P-115-H-3-O-OFF-WH | 43,2 | 6200 | 102 | 114 | 118 |
| 143 | 77-18586-110 | MP61.56P-143-H-3-O-OFF-WH | 54 | 7750 | 110 | 128 | 128 |
| 171 | 77-18682-128 | MP61.56P-171-H-3-O-OFF-WH | 64,8 | 9300 | 128 | 146 | 152 |
| 199 | 77-18778-140 | MP61.56P-199-H-3-O-OFF-WH | 75,6 | 10850 | 140 | 164 | 160 |
| 227 | 77-18874-150 | MP61.56P-227-H-3-O-OFF-WH | 86,4 | 12400 | 150 | 174 | 174 |
| 255 | 77-18970-160 | MP61.56P-255-H-3-O-OFF-WH | 97,2 | 13950 | 160 | 190 | 212 |
| 283 | 77-19066-170 | MP61.56P-283-H-3-O-OFF-WH | 108 | 15500 | 170 | 200 | 230 |
| 311 | 77-19162-186 | MP61.56P-311-H-3-O-OFF-WH | 118,8 | 17050 | 186 | 222 | 248 |
| 339 | 77-19258-198 | MP61.56P-339-H-3-O-OFF-WH | 129,6 | 18600 | 198 | 234 | 264 |
| 367 | 77-19354-232 | MP61.56P-367-H-3-O-OFF-WH | 140,4 | 20150 | 232 | 274 | 278 |
| 395 | 77-19450-246 | MP61.56P-395-H-3-O-OFF-WH | 151,2 | 21700 | 246 | 294 | 292 |
| 423 | 77-19546-256 | MP61.56P-423-H-3-O-OFF-WH | 162 | 23250 | 256 | 304 | 302 |
| 451 | 77-19642-266 | MP61.56P-451-H-3-O-OFF-WH | 172,8 | 24800 | 266 | 320 | 312 |

Δυνατότητα επιλογής Kelvin, αλλάζοντας το **3** (3000K) σε **4** (4000K), εάν επιθυμείτε ο φωτισμός σας να είναι 4000K αντί για 3000K.
 Δυνατότητα επιλογής μεταξύ Opal ή Κυψέλης, αλλάζοντας το **O** (OPAL) σε **MP** (HONEYCOMB), σύμφωνα με την επιθυμία σας.
 Δυνατότητα επιλογής μετασχηματιστή Triac ή Dali, αλλάζοντας το **OF** (ON/OFF) σε **T** (TRIAC) ή **D** (DALI), σύμφωνα με την επιλογή σας.
 Δυνατότητα επιλογής χρώματος, αλλάζοντας το **BL** (Μαύρο) σε **WH** (Άσπρο), **GR** (Γκρι) ή **SR** (Special Ral).

Επεξήγηση Τιμοκαταλόγων



Για Κυψέλη από μήκος 059-115 επιπλέον 6€ στην τιμή καταλόγου, από μήκος 143-227 επιπλέον 12€, από μήκος 255-339 επιπλέον 18€ και από μήκος 367-451 επιπλέον 24€ στην τιμή καταλόγου. Για τους μετασχηματιστές οι τιμές βρίσκονται στη λίστα παραπάνω. Για Special Ral επιπλέον 10% στην τιμή καταλόγου.

Για να δημιουργήσετε τον προσωπικό σας κωδικό μπορείτε να επισκεφτείτε το site μας www.masterlighting.gr ή μπορείτε να πάτε στην προηγούμενη σελίδα...

Η τιμή καταλόγου καθώς και ο κωδικός 77-XXXXX-XXX διαφέρει ανάλογα με τις επιλογές σας.

Περιλαμβάνονται όλα τα εξαρτήματα ανάρτησης.

Profile - MP44.70

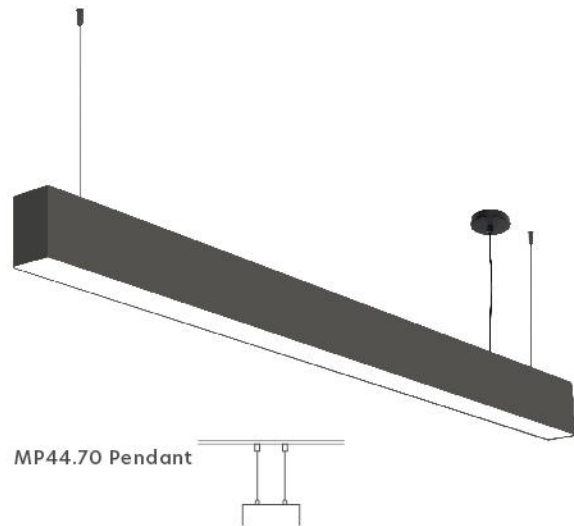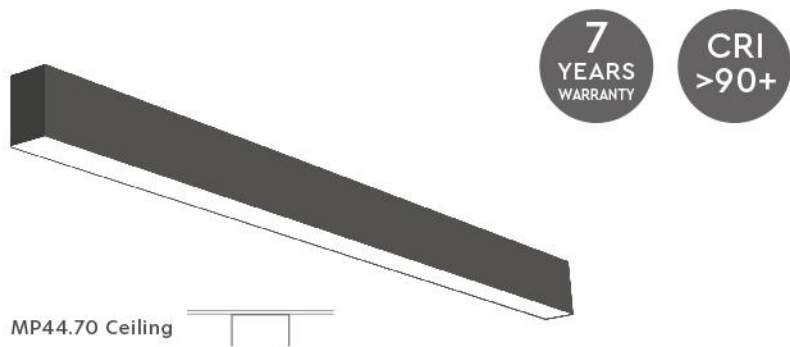

MP44.70 Pendant or Ceiling

Is a led profile luminaire, body of aluminum, painted with electrostatic paint with a matte finish. Designed for ceiling or pendant mounting, providing direct light through an opal diffuser or honeycomb. Luminaire equipped with the best quality Samsung led chips 200Lm/W and KGP drivers.

MP44.70 Κρεμαστό ή Οροφής

Είναι φωτιστικό προφίλ led, σώμα από αλουμίνιο, βαμμένο με ηλεκτροστατική βαφή με ματ φινιρίσμα. Σχεδιασμένο για τοποθέτηση σε οροφή ή κρεμαστό, παρέχοντας άμεσο φωτισμό μέσω της opal διάχυσης ή κηρήθρας. Φωτιστικό εξοπλισμένο με την καλύτερη ποιότητα. Προγράμματα οδήγησης Samsung led chips 200Lm/W και KGP.

Main Features

● Black ● White ● Grey ● Special Ral



Characteristics and Advantages

- Available from 59cm to 451cm
- Opal diffuser UGR<22 or Honeycomb UGR<15
- Beam Angle (Opal 120°, Honeycomb 30°)
- Three types of driver (ON-OFF, DALI, TRIAC with the ability TUYA)
- Coming in White, Black, Grey or optionally Special Ral
- Included 1,5m wire adjustable suspension. Request for 3m or 5m
- Low operating temperature due to excellent heat induction
- Excellent performance with low power consumption

Χαρακτηριστικά και Πλεονεκτήματα

- Διατίθεται από 59cm έως 451cm
- Διαχυτής Opal UGR<22 ή Κυψέλης UGR<15
- Γωνία δέσμης (Opal 120°, Κυψέλης 30°)
- Τρεις τύποι μετασχηματιστών (ON-OFF, DALI, TRIAC με δυνατότητα TUYA)
- Διατίθεται σε λευκό, μαύρο, γκρι ή προαιρετικά Special Ral
- Περιλαμβάνεται συρμάτινη ρυθμιζόμενη ανάρτηση 1,5m. Αίτημα για 3m ή 5m.
- Χαμηλή θερμοκρασία λειτουργίας λόγω εξαιρετικής επαγωγής θερμότητας
- Εξαιρετική απόδοση με χαμηλή κατανάλωση ενέργειας

All the hanging and ceiling metal safety accessories are included.

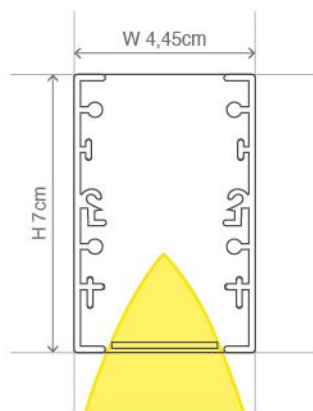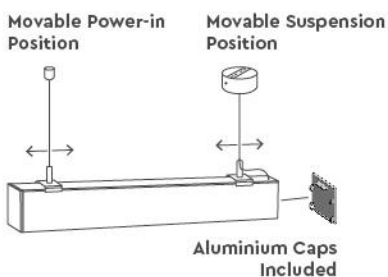

| MASTER PROFILES | | | | | | | |
|-----------------|---------------|--------------|--------------|-----------|-----------|--------------|--------------|
| Length cm | Standart Watt | | | Length cm | High Watt | | |
| | Watt | Lumen 3.000K | Lumen 4.000K | | Watt | Lumen 3.000K | Lumen 4.000K |
| 59 | 12,6 | 1880 | 1900 | 59 | 21,6 | 3100 | 3120 |
| 87 | 18,9 | 2820 | 2850 | 87 | 32,4 | 4650 | 4680 |
| 115 | 25,2 | 3760 | 3800 | 115 | 43,2 | 6200 | 6240 |
| 143 | 31,5 | 4700 | 4750 | 143 | 54 | 7750 | 7800 |
| 171 | 37,8 | 5640 | 5700 | 171 | 64,8 | 9300 | 9360 |
| 199 | 44,1 | 6580 | 6650 | 199 | 75,6 | 10850 | 10920 |
| 227 | 50,4 | 7520 | 7600 | 227 | 86,4 | 12400 | 12480 |
| 255 | 56,7 | 8460 | 8550 | 255 | 97,2 | 13950 | 14040 |
| 283 | 63 | 9400 | 9500 | 283 | 108 | 15500 | 15600 |
| 311 | 69,3 | 10340 | 10450 | 311 | 118,8 | 17050 | 17160 |
| 339 | 75,6 | 11280 | 11400 | 339 | 129,6 | 18600 | 18720 |
| 367 | 81,9 | 12220 | 12350 | 367 | 140,4 | 20150 | 20280 |
| 395 | 88,2 | 13160 | 13300 | 395 | 151,2 | 21700 | 21840 |
| 423 | 94,5 | 14100 | 14250 | 423 | 162 | 23250 | 23400 |
| 451 | 100,8 | 15040 | 15200 | 451 | 172,8 | 24800 | 24960 |



Build your own code:

Your Code: MP44.70

Example Code:

MP44.70C-115-S-3-O-T-BL

| Structure | Length | Watt Power | Kelvin | Optic Diffuser | Driver | Body Color |
|-----------|--------|------------|--------|----------------|--------|------------|
| C | 115 | S | 3 | O | T | BL |
| Structure | Length | Watt Power | Kelvin | Optic Diffuser | Driver | Body Color |



Opal Diffuser

Choose Technical Configurations

| Structure | Length | Watt Power | Kelvin | Optic Diffuser | Driver | Body Color |
|----------------------------|---|--------------------------|--------------------------|--|--------------------------------------|---|
| C = Ceiling P = Pendant | 059 = 59 087 = 87 115 = 115 143 = 143 171 = 171 199 = 199 227 = 227 255 = 255 283 = 283 311 = 311 339 = 339 367 = 367 395 = 395 423 = 423 451 = 451 | S = Standart H = High | 3 = 3.000K 4 = 4.000K | O = Opal Diffuser MP = Honeycomb Diffuser | OF = ON-OFF D = Dali T = Triac | WH = White BL = Black GR = Grey SR = Special Ral |





Honeycomb Diffuser



TUYA SWITCH
77-50498-40
Only with Triac Driver

*You can only choose from the choices above

MP44.70 Ceiling

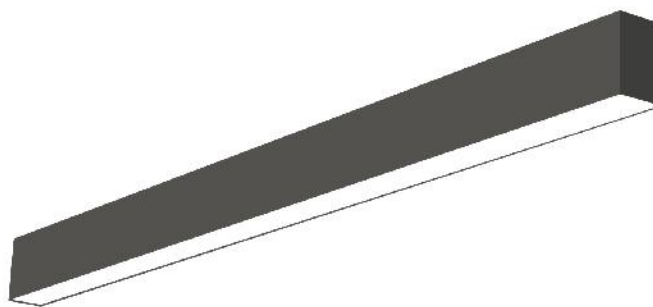

MP44.70 CEILING BLACK

STANDART WATT

| Length (cm) | Code On/off | Description Code | Watt | Lumen | On/off | Triac | Dali |
|-------------|--------------|---------------------------|-------|-------|--------|-------|------|
| 59 | 77-12154-62 | MP44.70C-059-S-3-O-OFF-BL | 12,6 | 1880 | 62 | 68 | 94 |
| 87 | 77-12250-78 | MP44.70C-087-S-3-O-OFF-BL | 18,9 | 2820 | 78 | 84 | 112 |
| 115 | 77-12346-90 | MP44.70C-115-S-3-O-OFF-BL | 25,2 | 3760 | 90 | 102 | 118 |
| 143 | 77-12442-104 | MP44.70C-143-S-3-O-OFF-BL | 31,5 | 4700 | 104 | 122 | 138 |
| 171 | 77-12538-120 | MP44.70C-171-S-3-O-OFF-BL | 37,8 | 5640 | 120 | 132 | 150 |
| 199 | 77-12634-134 | MP44.70C-199-S-3-O-OFF-BL | 44,1 | 6580 | 134 | 152 | 168 |
| 227 | 77-12730-148 | MP44.70C-227-S-3-O-OFF-BL | 50,4 | 7520 | 148 | 174 | 180 |
| 255 | 77-12826-162 | MP44.70C-255-S-3-O-OFF-BL | 56,7 | 8460 | 162 | 180 | 202 |
| 283 | 77-12922-168 | MP44.70C-283-S-3-O-OFF-BL | 63 | 9400 | 168 | 186 | 216 |
| 311 | 77-13018-192 | MP44.70C-311-S-3-O-OFF-BL | 69,3 | 10340 | 192 | 216 | 234 |
| 339 | 77-13114-212 | MP44.70C-339-S-3-O-OFF-BL | 75,6 | 11280 | 212 | 236 | 266 |
| 367 | 77-13210-226 | MP44.70C-367-S-3-O-OFF-BL | 81,9 | 12220 | 226 | 250 | 284 |
| 395 | 77-13306-246 | MP44.70C-395-S-3-O-OFF-BL | 88,2 | 13160 | 246 | 276 | 304 |
| 423 | 77-13402-260 | MP44.70C-423-S-3-O-OFF-BL | 94,5 | 14100 | 260 | 290 | 324 |
| 451 | 77-13498-278 | MP44.70C-451-S-3-O-OFF-BL | 100,8 | 15040 | 278 | 308 | 346 |

HIGH WATT

| Length (cm) | Code On/off | Description Code | Watt | Lumen | On/off | Triac | Dali |
|-------------|--------------|---------------------------|-------|-------|--------|-------|------|
| 59 | 77-12158-68 | MP44.70C-059-H-3-O-OFF-BL | 21,6 | 3100 | 68 | 74 | 94 |
| 87 | 77-12254-84 | MP44.70C-087-H-3-O-OFF-BL | 32,4 | 4650 | 84 | 96 | 112 |
| 115 | 77-12350-96 | MP44.70C-115-H-3-O-OFF-BL | 43,2 | 6200 | 96 | 108 | 122 |
| 143 | 77-12442-110 | MP44.70C-143-H-3-O-OFF-BL | 54 | 7750 | 110 | 128 | 144 |
| 171 | 77-12542-138 | MP44.70C-171-H-3-O-OFF-BL | 64,8 | 9300 | 138 | 156 | 162 |
| 199 | 77-12638-152 | MP44.70C-199-H-3-O-OFF-BL | 75,6 | 10850 | 152 | 170 | 176 |
| 227 | 77-12734-162 | MP44.70C-227-H-3-O-OFF-BL | 86,4 | 12400 | 162 | 180 | 186 |
| 255 | 77-12830-178 | MP44.70C-255-H-3-O-OFF-BL | 97,2 | 13950 | 178 | 196 | 232 |
| 283 | 77-12926-190 | MP44.70C-283-H-3-O-OFF-BL | 108 | 15500 | 190 | 220 | 252 |
| 311 | 77-13022-208 | MP44.70C-311-H-3-O-OFF-BL | 118,8 | 17050 | 208 | 244 | 270 |
| 339 | 77-13118-220 | MP44.70C-339-H-3-O-OFF-BL | 129,6 | 18600 | 220 | 256 | 288 |
| 367 | 77-13214-260 | MP44.70C-367-H-3-O-OFF-BL | 140,4 | 20150 | 260 | 302 | 322 |
| 395 | 77-13310-274 | MP44.70C-395-H-3-O-OFF-BL | 151,2 | 21700 | 274 | 322 | 358 |
| 423 | 77-13406-288 | MP44.70C-423-H-3-O-OFF-BL | 162 | 23250 | 288 | 336 | 402 |
| 451 | 77-13502-308 | MP44.70C-451-H-3-O-OFF-BL | 172,8 | 24800 | 308 | 362 | 428 |

Ability to select Kelvin, changing the **3** (3000K) to **4** (4000K), if you wish your lighting to be 4000k than 3000k.
 Ability to select between Opal or Honeycomb, changing the **O** (OPAL) to **MP** (HONEYCOMB), according to your desire.
 Ability to select Driver Triac or Dali, changing the **OF** (ON/OFF) to **T** (TRIAC) or **D** (DALI), according to your desire of Driver.
 Ability to select Color, changing the **BL** (BLACK) to **WH** (WHITE), **GR** (GREY) or **SR** (SPECIAL RAL), according to your desire.

Price Catalogue Explanation



For Honeycomb from length 059-115 extra 6€ to the price catalogue, from 143-227 extra 12€, from 255-339 extra 18€ and from 367-451 extra 24€. For Drivers the prices are on the list. For Special Ral extra 10% to the price catalogue.

To build your personal code you can visit our site www.masterlighting.gr or you can go to the previous page....

The price catalogue as well as the code 77-XXXXX-XXX varies according to your options.

Included all the ceiling accessories.

MP44.70 Pendant

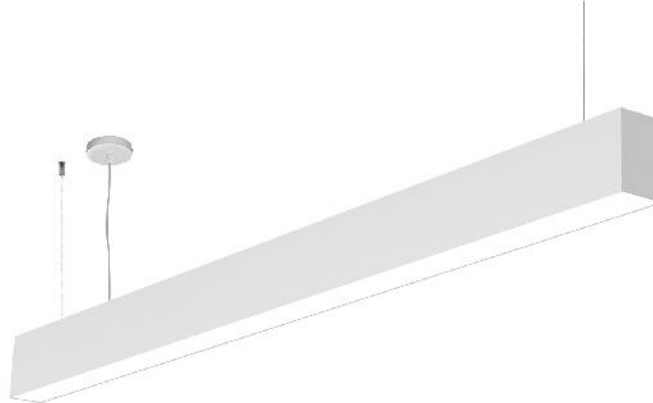

MP44.70 PENDANT WHITE

STANDART WATT

| Length (cm) | Code On/off | Description Code | Watt | Lumen | On/off | Triac | Dali |
|-------------|--------------|---------------------------|-------|-------|--------|-------|------|
| 59 | 77-19734-66 | MP44.70P-059-S-3-O-OFF-WH | 12,6 | 1900 | 66 | 72 | 98 |
| 87 | 77-19830-82 | MP44.70P-087-S-3-O-OFF-WH | 18,9 | 2820 | 82 | 88 | 116 |
| 115 | 77-19926-94 | MP44.70P-115-S-3-O-OFF-WH | 25,2 | 3800 | 94 | 106 | 122 |
| 143 | 77-20022-108 | MP44.70P-143-S-3-O-OFF-WH | 31,5 | 4700 | 108 | 120 | 136 |
| 171 | 77-20118-124 | MP44.70P-171-S-3-O-OFF-WH | 37,8 | 5640 | 124 | 136 | 154 |
| 199 | 77-20214-138 | MP44.70P-199-S-3-O-OFF-WH | 44,1 | 6580 | 138 | 156 | 172 |
| 227 | 77-20310-152 | MP44.70P-227-S-3-O-OFF-WH | 50,4 | 7520 | 152 | 170 | 184 |
| 255 | 77-20406-166 | MP44.70P-255-S-3-O-OFF-WH | 56,7 | 8460 | 166 | 184 | 206 |
| 283 | 77-20502-170 | MP44.70P-283-S-3-O-OFF-WH | 63 | 9400 | 170 | 188 | 220 |
| 311 | 77-20598-196 | MP44.70P-311-S-3-O-OFF-WH | 69,3 | 10340 | 196 | 220 | 238 |
| 339 | 77-20694-216 | MP44.70P-339-S-3-O-OFF-WH | 75,6 | 11280 | 216 | 240 | 270 |
| 367 | 77-20790-230 | MP44.70P-367-S-3-O-OFF-WH | 81,9 | 12220 | 230 | 254 | 288 |
| 395 | 77-20886-250 | MP44.70P-395-S-3-O-OFF-WH | 88,2 | 13300 | 250 | 280 | 308 |
| 423 | 77-20982-264 | MP44.70P-423-S-3-O-OFF-WH | 94,5 | 14100 | 264 | 310 | 330 |
| 451 | 77-21078-282 | MP44.70P-451-S-3-O-OFF-WH | 100,8 | 15040 | 282 | 312 | 350 |

HIGH WATT

| Length (cm) | Code On/off | Description Code | Watt | Lumen | On/off | Triac | Dali |
|-------------|--------------|---------------------------|-------|-------|--------|-------|------|
| 59 | 77-19740-72 | MP44.70P-059-H-3-O-OFF-WH | 21,6 | 3100 | 72 | 78 | 98 |
| 87 | 77-19834-88 | MP44.70P-087-H-3-O-OFF-WH | 32,4 | 4650 | 88 | 100 | 116 |
| 115 | 77-19930-100 | MP44.70P-115-H-3-O-OFF-WH | 43,2 | 6200 | 100 | 112 | 126 |
| 143 | 77-20026-114 | MP44.70P-143-H-3-O-OFF-WH | 54 | 7750 | 114 | 132 | 142 |
| 171 | 77-20122-142 | MP44.70P-171-H-3-O-OFF-WH | 64,8 | 9300 | 142 | 160 | 166 |
| 199 | 77-20218-156 | MP44.70P-199-H-3-O-OFF-WH | 75,6 | 10850 | 156 | 180 | 180 |
| 227 | 77-20314-162 | MP44.70P-227-H-3-O-OFF-WH | 86,4 | 12480 | 162 | 190 | 190 |
| 255 | 77-20410-182 | MP44.70P-255-H-3-O-OFF-WH | 97,2 | 14040 | 182 | 212 | 136 |
| 283 | 77-20506-194 | MP44.70P-283-H-3-O-OFF-WH | 108 | 15500 | 194 | 224 | 156 |
| 311 | 77-20602-212 | MP44.70P-311-H-3-O-OFF-WH | 118,8 | 17050 | 212 | 148 | 274 |
| 339 | 77-20698-224 | MP44.70P-339-H-3-O-OFF-WH | 129,6 | 18600 | 224 | 260 | 292 |
| 367 | 77-20794-264 | MP44.70P-367-H-3-O-OFF-WH | 140,4 | 20280 | 264 | 306 | 328 |
| 395 | 77-20890-278 | MP44.70P-395-H-3-O-OFF-WH | 151,2 | 21700 | 278 | 326 | 358 |
| 423 | 77-20986-292 | MP44.70P-423-H-3-O-OFF-WH | 162 | 23250 | 292 | 340 | 378 |
| 451 | 77-21082-312 | MP44.70P-451-H-3-O-OFF-WH | 172,8 | 24800 | 312 | 366 | 408 |

Δυνατότητα επιλογής Kelvin, αλλάζοντας το **3** (3000K) σε **4** (4000K), εάν επιθυμείτε ο φωτισμός σας να είναι 4000K αντί για 3000K.
 Δυνατότητα επιλογής μεταξύ Opal ή Κυψέλης, αλλάζοντας το **O** (OPAL) σε **MP** (HONEYCOMB), σύμφωνα με την επιθυμία σας.
 Δυνατότητα επιλογής μετασχηματιστή Triac ή Dali, αλλάζοντας το **OF** (ON/OFF) σε **T** (TRIAC) ή **D** (DALI), σύμφωνα με την επιλογή σας.
 Δυνατότητα επιλογής χρώματος, αλλάζοντας το **BL** (Μαύρο) σε **WH** (Άσπρο), **GR** (Γκρι) ή **SR** (Special Ral).

Επεξήγηση Τιμοκαταλόγων


Για Κυψέλη από μήκος 059-115 επιπλέον 6€ στην τιμή καταλόγου, από μήκος 143-227 επιπλέον 12€, από μήκος 255-339 επιπλέον 18€ και από μήκος 367-451 επιπλέον 24€ στην τιμή καταλόγου. Για τους μετασχηματιστές οι τιμές βρίσκονται στη λίστα παραπάνω. Για Special Ral επιπλέον 10% στην τιμή καταλόγου.

Για να δημιουργήσετε τον προσωπικό σας κωδικό μπορείτε να επισκεφτείτε το site μας www.masterlighting.gr ή μπορείτε να πάτε στην προηγούμενη σελίδα...


Η τιμή καταλόγου καθώς και ο κωδικός 77-XXXXX-XXX διαφέρει ανάλογα με τις επιλογές σας.

Περιλαμβάνονται όλα τα εξαρτήματα ανάρτησης.

Profile - MP44.56

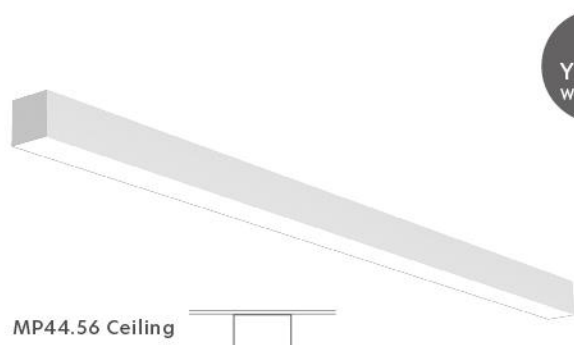

MP44.56 Ceiling

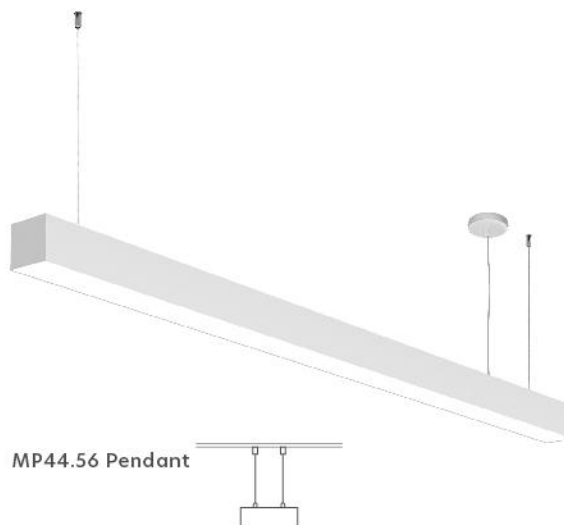

MP44.56 Pendant



MP44.56 Pendant or Ceiling

Is a led profile luminaire, body of aluminum, painted with electrostatic paint with a matte finish. Designed for ceiling or pendant mounting, providing direct light through an opal diffuser or honeycomb. Luminaire equipped with the best quality Samsung led chips 200Lm/W and KGP drivers.

MP44.56 Κρεμαστό ή Οροφής

Είναι φωτιστικό προφίλ led, σώμα από αλουμίνιο, βαμμένο με ηλεκτροστατική βαφή με ματ φινιρίσμα. Σχεδιασμένο για τοποθέτηση σε οροφή ή κρεμαστό, παρέχοντας άμεσο φωτισμό μέσω της opal διάχυσης ή κηρήθρας. Φωτιστικό εξοπλισμένο με την καλύτερη ποιότητα. Προγράμματα οδήγησης Samsung led chips 200Lm/W και KGP.

Main Features

● Black ● White ● Grey ● Special Ral



Characteristics and Advantages

- Available from 59cm to 451cm
- Opal diffuser UGR<22 or Honeycomb UGR<15
- Beam Angle (Opal 120°, Honeycomb 30°)
- Three types of driver (ON-OFF, DALI, TRIAC with the ability TUYA)
- Coming in White, Black, Grey or optionally Special Ral
- Included 1,5m wire adjustable suspension. Request for 3m or 5m
- Low operating temperature due to excellent heat induction
- Excellent performance with low power consumption

Χαρακτηριστικά και Πλεονεκτήματα

- Διατίθεται από 59cm έως 451cm
- Διαχυτής Opal UGR<22 ή Κυψέλης UGR<15
- Γωνία δέσμης (Opal 120°, Κυψέλης 30°)
- Τρεις τύποι μετασχηματιστών (ON-OFF, DALI, TRIAC με δυνατότητα TUYA)
- Διατίθεται σε λευκό, μαύρο, γκρι ή προαιρετικά Special Ral
- Περιλαμβάνεται συρμάτινη ρυθμιζόμενη ανάρτηση 1,5m. Αίτημα για 3m ή 5m.
- Χαμηλή θερμοκρασία λειτουργίας λόγω εξαιρετικής επαγωγής θερμότητας
- Εξαιρετική απόδοση με χαμηλή κατανάλωση ενέργειας

All the hanging and ceiling metal safety accessories are included.

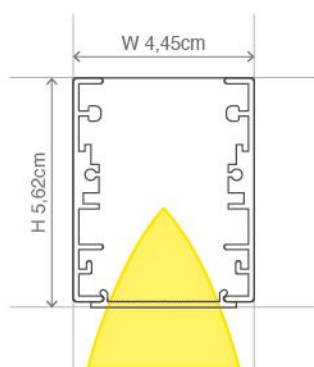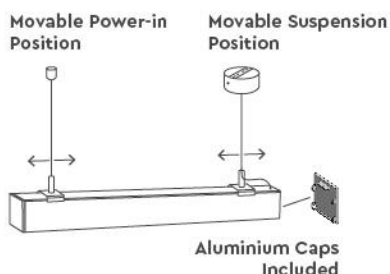

| MASTER PROFILES | | | | | | | |
|-----------------|---------------|--------------|--------------|-----------|-----------|--------------|--------------|
| Length cm | Standart Watt | | | Length cm | High Watt | | |
| | Watt | Lumen 3.000K | Lumen 4.000K | | Watt | Lumen 3.000K | Lumen 4.000K |
| 59 | 12,6 | 1880 | 1900 | 59 | 21,6 | 3100 | 3120 |
| 87 | 18,9 | 2820 | 2850 | 87 | 32,4 | 4650 | 4680 |
| 115 | 25,2 | 3760 | 3800 | 115 | 43,2 | 6200 | 6240 |
| 143 | 31,5 | 4700 | 4750 | 143 | 54 | 7750 | 7800 |
| 171 | 37,8 | 5640 | 5700 | 171 | 64,8 | 9300 | 9360 |
| 199 | 44,1 | 6580 | 6650 | 199 | 75,6 | 10850 | 10920 |
| 227 | 50,4 | 7520 | 7600 | 227 | 86,4 | 12400 | 12480 |
| 255 | 56,7 | 8460 | 8550 | 255 | 97,2 | 13950 | 14040 |
| 283 | 63 | 9400 | 9500 | 283 | 108 | 15500 | 15600 |
| 311 | 69,3 | 10340 | 10450 | 311 | 118,8 | 17050 | 17160 |
| 339 | 75,6 | 11280 | 11400 | 339 | 129,6 | 18600 | 18720 |
| 367 | 81,9 | 12220 | 12350 | 367 | 140,4 | 20150 | 20280 |
| 395 | 88,2 | 13160 | 13300 | 395 | 151,2 | 21700 | 21840 |
| 423 | 94,5 | 14100 | 14250 | 423 | 162 | 23250 | 23400 |
| 451 | 100,8 | 15040 | 15200 | 451 | 172,8 | 24800 | 24960 |



Build your own code:

Your Code: MP44.56

Example Code:

MP44.56P-143-H-4-O-T-WH

| Structure | Length | Watt Power | Kelvin | Optic Diffuser | Driver | Body Color |
|-----------|--------|------------|--------|----------------|--------|------------|
| P | 143 | H | 4 | O | T | WH |
| Structure | Length | Watt Power | Kelvin | Optic Diffuser | Driver | Body Color |



Opal Diffuser

Choose Technical Configurations

| Structure | Length | Watt Power | Kelvin | Optic Diffuser | Driver | Body Color |
|----------------------------|---|--------------------------|--------------------------|--|--------------------------------------|--|
| C = Ceiling P = Pendant | 059 = 59 087 = 87 115 = 115 143 = 143 171 = 171 199 = 199 227 = 227 255 = 255 283 = 283 311 = 311 339 = 339 367 = 367 395 = 395 423 = 423 451 = 451 | S = Standart H = High | 3 = 3.000K 4 = 4.000K | O = Opal Diffuser MP = Honeycomb Diffuser | OF = ON-OFF D = Dali T = Triac | WH = White BL = Black GR = Grey SR = Special Ra |





Honeycomb Diffuser



TUYA SWITCH
77-50498-40
Only with Triac Driver

*You can only choose from the choices above

MP44.56 Ceiling

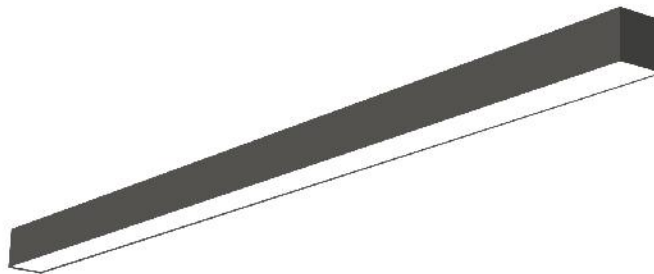

MP44.56 CEILING BLACK

STANDART WATT

| Length (cm) | Code On/off | Description Code | Watt | Lumen | On/off | Triac | Dali |
|-------------|--------------|---------------------------|-------|-------|--------|-------|------|
| 59 | 77-13594-58 | MP44.56C-059-S-3-O-OFF-BL | 12,6 | 1880 | 58 | 64 | 88 |
| 87 | 77-13690-68 | MP44.56C-087-S-3-O-OFF-BL | 18,9 | 2820 | 68 | 74 | 100 |
| 115 | 77-13786-80 | MP44.56C-115-S-3-O-OFF-BL | 25,2 | 3760 | 80 | 92 | 106 |
| 143 | 77-13882-90 | MP44.56C-143-S-3-O-OFF-BL | 31,5 | 4700 | 90 | 102 | 118 |
| 171 | 77-13978-106 | MP44.56C-171-S-3-O-OFF-BL | 37,8 | 5640 | 106 | 112 | 134 |
| 199 | 77-14074-116 | MP44.56C-199-S-3-O-OFF-BL | 44,1 | 6580 | 116 | 134 | 148 |
| 227 | 77-14170-130 | MP44.56C-227-S-3-O-OFF-BL | 50,4 | 7520 | 130 | 148 | 160 |
| 255 | 77-14266-138 | MP44.56C-255-S-3-O-OFF-BL | 56,7 | 8460 | 138 | 156 | 176 |
| 283 | 77-14362-148 | MP44.56C-283-S-3-O-OFF-BL | 63 | 9400 | 148 | 166 | 186 |
| 311 | 77-14458-162 | MP44.56C-311-S-3-O-OFF-BL | 69,3 | 10340 | 162 | 186 | 202 |
| 339 | 77-14554-178 | MP44.56C-339-S-3-O-OFF-BL | 75,6 | 11280 | 178 | 202 | 232 |
| 367 | 77-14650-188 | MP44.56C-367-S-3-O-OFF-BL | 81,9 | 12220 | 188 | 212 | 244 |
| 395 | 77-14746-200 | MP44.56C-395-S-3-O-OFF-BL | 88,2 | 13160 | 200 | 230 | 256 |
| 423 | 77-14842-206 | MP44.56C-423-S-3-O-OFF-BL | 94,5 | 14100 | 206 | 236 | 272 |
| 451 | 77-14938-222 | MP44.56C-451-S-3-O-OFF-BL | 100,8 | 15040 | 222 | 252 | 282 |

HIGH WATT

| Length (cm) | Code On/off | Description Code | Watt | Lumen | On/off | Triac | Dali |
|-------------|--------------|---------------------------|-------|-------|--------|-------|------|
| 59 | 77-13598-62 | MP44.56C-059-H-3-O-OFF-BL | 21,6 | 3100 | 62 | 68 | 88 |
| 87 | 77-13694-76 | MP44.56C-087-H-3-O-OFF-BL | 32,4 | 4650 | 76 | 88 | 100 |
| 115 | 77-13790-96 | MP44.56C-115-H-3-O-OFF-BL | 43,2 | 6200 | 96 | 108 | 112 |
| 143 | 77-13886-102 | MP44.56C-143-H-3-O-OFF-BL | 54 | 7750 | 102 | 120 | 122 |
| 171 | 77-13982-122 | MP44.56C-171-H-3-O-OFF-BL | 64,8 | 9300 | 122 | 140 | 148 |
| 199 | 77-14078-134 | MP44.56C-199-H-3-O-OFF-BL | 75,6 | 10850 | 134 | 158 | 158 |
| 227 | 77-14174-144 | MP44.56C-227-H-3-O-OFF-BL | 86,4 | 12400 | 144 | 168 | 168 |
| 255 | 77-14270-154 | MP44.56C-255-H-3-O-OFF-BL | 97,2 | 13950 | 154 | 184 | 206 |
| 283 | 77-14366-164 | MP44.56C-283-H-3-O-OFF-BL | 108 | 15500 | 164 | 194 | 224 |
| 311 | 77-14462-180 | MP44.56C-311-H-3-O-OFF-BL | 118,8 | 17050 | 180 | 216 | 242 |
| 339 | 77-14558-192 | MP44.56C-339-H-3-O-OFF-BL | 129,6 | 18600 | 192 | 228 | 258 |
| 367 | 77-14654-226 | MP44.56C-367-H-3-O-OFF-BL | 140,4 | 20150 | 226 | 268 | 272 |
| 395 | 77-14750-240 | MP44.56C-395-H-3-O-OFF-BL | 151,2 | 21700 | 240 | 288 | 282 |
| 423 | 77-14846-250 | MP44.56C-423-H-3-O-OFF-BL | 162 | 23250 | 250 | 298 | 296 |
| 451 | 77-14941-260 | MP44.56C-451-H-3-O-OFF-BL | 172,8 | 24800 | 260 | 314 | 306 |

Ability to select Kelvin, changing the **3** (3000K) to **4** (4000K), if you wish your lighting to be 4000k than 3000k.
 Ability to select between Opal or Honeycomb, changing the **O** (OPAL) to **MP** (HONEYCOMB), according to your desire.
 Ability to select Driver Triac or Dali, changing the **OF** (ON/OFF) to **T** (TRIAC) or **D** (DALI), according to your desire of Driver.
 Ability to select Color, changing the **BL** (BLACK) to **WH** (WHITE), **GR** (GREY) or **SR** (SPECIAL RAL), according to your desire.

Price Catalogue Explanation



For Honeycomb from length 059-115 extra 6€ to the price catalogue, from 143-227 extra 12€, from 255-339 extra 18€ and from 367-451 extra 24€. For Drivers the prices are on the list. For Special Ral extra 10% to the price catalogue.

To build your personal code you can visit our site www.masterlighting.gr or you can go to the previous page....

The price catalogue as well as the code 77-XXXXX-XXX varies according to your options.

Included all the ceiling accessories.

MP44.56 Pendant

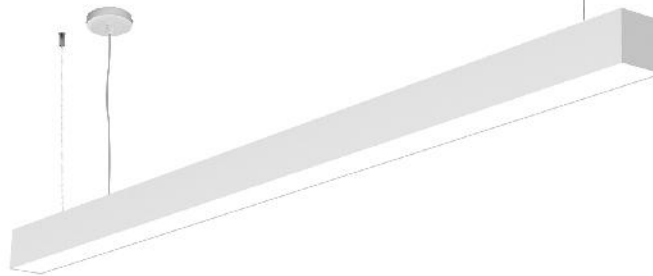

MP44.56 PENDANT WHITE

STANDART WATT

| Length (cm) | Code On/off | Description Code | Watt | Lumen | On/off | Triac | Dali |
|-------------|--------------|---------------------------|-------|-------|--------|-------|------|
| 59 | 77-21174-62 | MP44.56P-059-S-3-O-OFF-WH | 12,6 | 1900 | 62 | 68 | 92 |
| 87 | 77-21270-72 | MP44.56P-087-S-3-O-OFF-WH | 18,9 | 2820 | 72 | 78 | 104 |
| 115 | 77-21366-84 | MP44.56P-115-S-3-O-OFF-WH | 25,2 | 3800 | 84 | 96 | 110 |
| 143 | 77-21462-94 | MP44.56P-143-S-3-O-OFF-WH | 31,5 | 4700 | 94 | 106 | 122 |
| 171 | 77-21558-110 | MP44.56P-171-S-3-O-OFF-WH | 37,8 | 5640 | 110 | 122 | 138 |
| 199 | 77-21654-120 | MP44.56P-199-S-3-O-OFF-WH | 44,1 | 6580 | 120 | 138 | 150 |
| 227 | 77-21750-134 | MP44.56P-227-S-3-O-OFF-WH | 50,4 | 7520 | 134 | 152 | 164 |
| 255 | 77-21846-142 | MP44.56P-255-S-3-O-OFF-WH | 56,7 | 8460 | 142 | 160 | 180 |
| 283 | 77-21942-152 | MP44.56P-283-S-3-O-OFF-WH | 63 | 9400 | 152 | 170 | 190 |
| 311 | 77-22038-166 | MP44.56P-311-S-3-O-OFF-WH | 69,3 | 10340 | 166 | 190 | 206 |
| 339 | 77-22134-182 | MP44.56P-339-S-3-O-OFF-WH | 75,6 | 11280 | 182 | 206 | 232 |
| 367 | 77-22230-192 | MP44.56P-367-S-3-O-OFF-WH | 81,9 | 12220 | 192 | 216 | 248 |
| 395 | 77-22326-204 | MP44.56P-395-S-3-O-OFF-WH | 88,2 | 13300 | 204 | 234 | 260 |
| 423 | 77-22422-214 | MP44.56P-423-S-3-O-OFF-WH | 94,5 | 14100 | 214 | 244 | 276 |
| 451 | 77-22516-226 | MP44.56P-451-S-3-O-OFF-WH | 100,8 | 15040 | 226 | 256 | 286 |

HIGH WATT

| Length (cm) | Code On/off | Description Code | Watt | Lumen | On/off | Triac | Dali |
|-------------|--------------|---------------------------|-------|-------|--------|-------|------|
| 59 | 77-21178-66 | MP44.56P-059-H-3-O-OFF-WH | 21,6 | 3100 | 66 | 72 | 92 |
| 87 | 77-21274-72 | MP44.56P-087-H-3-O-OFF-WH | 32,4 | 4650 | 72 | 84 | 104 |
| 115 | 77-21370-100 | MP44.56P-115-H-3-O-OFF-WH | 43,2 | 6200 | 100 | 112 | 116 |
| 143 | 77-21466-108 | MP44.56P-143-H-3-O-OFF-WH | 54 | 7750 | 108 | 126 | 126 |
| 171 | 77-21562-126 | MP44.56P-171-H-3-O-OFF-WH | 64,8 | 9300 | 126 | 144 | 150 |
| 199 | 77-21658-138 | MP44.56P-199-H-3-O-OFF-WH | 75,6 | 10850 | 138 | 162 | 158 |
| 227 | 77-21754-148 | MP44.56P-227-H-3-O-OFF-WH | 86,4 | 12480 | 148 | 172 | 172 |
| 255 | 77-21850-158 | MP44.56P-255-H-3-O-OFF-WH | 97,2 | 14040 | 158 | 188 | 210 |
| 283 | 77-21946-168 | MP44.56P-283-H-3-O-OFF-WH | 108 | 15500 | 168 | 194 | 228 |
| 311 | 77-22042-184 | MP44.56P-311-H-3-O-OFF-WH | 118,8 | 17050 | 184 | 220 | 246 |
| 339 | 77-22138-196 | MP44.56P-339-H-3-O-OFF-WH | 129,6 | 18600 | 196 | 232 | 262 |
| 367 | 77-22234-230 | MP44.56P-367-H-3-O-OFF-WH | 140,4 | 20280 | 230 | 272 | 276 |
| 395 | 77-22330-244 | MP44.56P-395-H-3-O-OFF-WH | 151,2 | 21700 | 244 | 292 | 290 |
| 423 | 77-22426-254 | MP44.56P-423-H-3-O-OFF-WH | 162 | 23250 | 254 | 302 | 300 |
| 451 | 77-22520-264 | MP44.56P-451-H-3-O-OFF-WH | 172,8 | 24800 | 264 | 318 | 310 |

Δυνατότητα επιλογής Kelvin, αλλάζοντας το **3** (3000K) σε **4** (4000K), εάν επιθυμείτε ο φωτισμός σας να είναι 4000K αντί για 3000K.
 Δυνατότητα επιλογής μεταξύ Opal ή Κυψέλης, αλλάζοντας το **O** (OPAL) σε **MP** (HONEYCOMB), σύμφωνα με την επιθυμία σας.
 Δυνατότητα επιλογής μετασχηματιστή Triac ή Dali, αλλάζοντας το **OF** (ON/OFF) σε **T** (TRIAC) ή **D** (DALI), σύμφωνα με την επιλογή σας.
 Δυνατότητα επιλογής χρώματος, αλλάζοντας το **BL** (Μαύρο) σε **WH** (Άσπρο), **GR** (Γκρι) ή **SR** (Special Ral).

Επεξήγηση Τιμοκαταλόγων


Για Κυψέλη από μήκος 059-115 επιπλέον 6€ στην τιμή καταλόγου, από μήκος 143-227 επιπλέον 12€, από μήκος 255-339 επιπλέον 18€ και από μήκος 367-451 επιπλέον 24€ στην τιμή καταλόγου. Για τους μετασχηματιστές οι τιμές βρίσκονται στη λίστα παραπάνω. Για Special Ral επιπλέον 10% στην τιμή καταλόγου.

Για να δημιουργήσετε τον προσωπικό σας κωδικό μπορείτε να επισκεφτείτε το site μας www.masterlighting.gr ή μπορείτε να πάτε στην προηγούμενη σελίδα...


Η τιμή καταλόγου καθώς και ο κωδικός 77-XXXXX-XXX διαφέρει ανάλογα με τις επιλογές σας.

Περιλαμβάνονται όλα τα εξαρτήματα ανάρτησης.

Profile - MP27.70

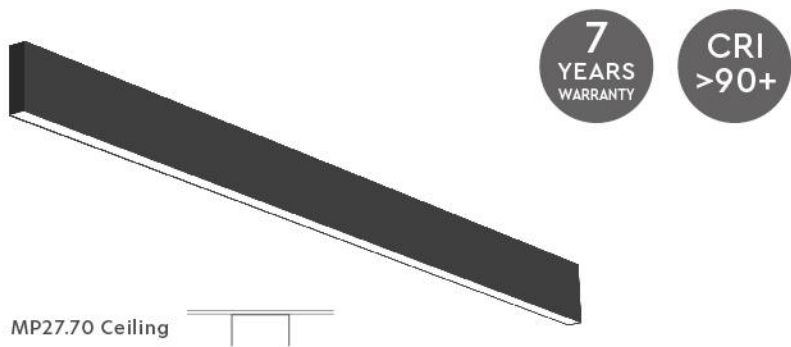

MP27.70 Ceiling

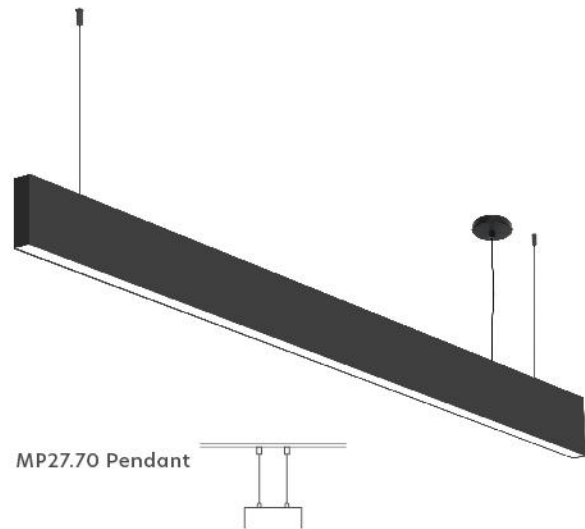

MP27.70 Pendant



MP27.70 Pendant or Ceiling

Is a led profile luminaire, body of aluminum, painted with electrostatic paint with a matte finish. Designed for ceiling or pendant mounting, providing direct light through an opal diffuser or honeycomb. Luminaire equipped with the best quality Samsung led chips 200Lm/W and KGP drivers.

MP27.70 Κρεμαστό ή Οροφής

Είναι φωτιστικό προφίλ led, σώμα από αλουμίνιο, βαμμένο με ηλεκτροστατική βαφή με ματ φινιρίσμα. Σχεδιασμένο για τοποθέτηση σε οροφή ή κρεμαστό, παρέχοντας άμεσο φωτισμό μέσω της opal διάχυσης ή κηρήθρας. Φωτιστικό εξοπλισμένο με την καλύτερη ποιότητα. Προγράμματα οδήγησης Samsung led chips 200Lm/W και KGP.

Main Features

● Black ● White ● Grey ● Special Ral



Characteristics and Advantages

- Available from 59cm to 451cm
- Opal diffuser UGR<22 or Honeycomb UGR<15
- Beam Angle (Opal 120°, Honeycomb 30°)
- Three types of driver (ON-OFF, DALI, TRIAC with the ability TUYA)
- Coming in White, Black, Grey or optionally Special Ral
- Included 1,5m wire adjustable suspension. Request for 3m or 5m
- Low operating temperature due to excellent heat induction
- Excellent performance with low power consumption

Χαρακτηριστικά και Πλεονεκτήματα

- Διατίθεται από 59cm έως 451cm
- Διαχυτής Opal UGR<22 ή Κυψέλης UGR<15
- Γωνία δέσμης (Opal 120°, Κυψέλης 30°)
- Τρεις τύποι μετασχηματιστών (ON-OFF, DALI, TRIAC με δυνατότητα TUYA)
- Διατίθεται σε λευκό, μαύρο, γκρι ή προαιρετικά Special Ral
- Περιλαμβάνεται συρμάτινη ρυθμιζόμενη ανάρτηση 1,5m. Αίτημα για 3m ή 5m.
- Χαμηλή θερμοκρασία λειτουργίας λόγω εξαιρετικής επαγωγής θερμότητας
- Εξαιρετική απόδοση με χαμηλή κατανάλωση ενέργειας

All the hanging and ceiling metal safety accessories are included.

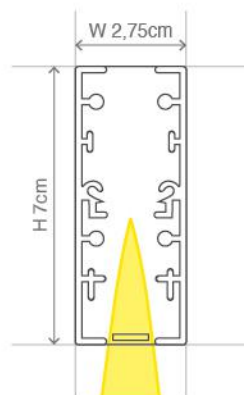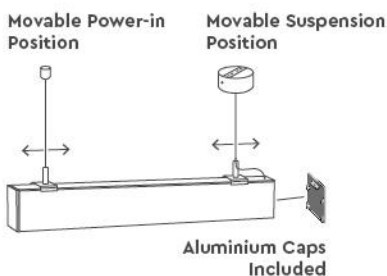

| MASTER PROFILES | | | | | | | |
|-----------------|---------------|--------------|--------------|-----------|-----------|--------------|--------------|
| Length cm | Standart Watt | | | Length cm | High Watt | | |
| | Watt | Lumen 3.000K | Lumen 4.000K | | Watt | Lumen 3.000K | Lumen 4.000K |
| 59 | 12,6 | 1880 | 1900 | 59 | 21,6 | 3100 | 3120 |
| 87 | 18,9 | 2820 | 2850 | 87 | 32,4 | 4650 | 4680 |
| 115 | 25,2 | 3760 | 3800 | 115 | 43,2 | 6200 | 6240 |
| 143 | 31,5 | 4700 | 4750 | 143 | 54 | 7750 | 7800 |
| 171 | 37,8 | 5640 | 5700 | 171 | 64,8 | 9300 | 9360 |
| 199 | 44,1 | 6580 | 6650 | 199 | 75,6 | 10850 | 10920 |
| 227 | 50,4 | 7520 | 7600 | 227 | 86,4 | 12400 | 12480 |
| 255 | 56,7 | 8460 | 8550 | 255 | 97,2 | 13950 | 14040 |
| 283 | 63 | 9400 | 9500 | 283 | 108 | 15500 | 15600 |
| 311 | 69,3 | 10340 | 10450 | 311 | 118,8 | 17050 | 17160 |
| 339 | 75,6 | 11280 | 11400 | 339 | 129,6 | 18600 | 18720 |
| 367 | 81,9 | 12220 | 12350 | 367 | 140,4 | 20150 | 20280 |
| 395 | 88,2 | 13160 | 13300 | 395 | 151,2 | 21700 | 21840 |
| 423 | 94,5 | 14100 | 14250 | 423 | 162 | 23250 | 23400 |
| 451 | 100,8 | 15040 | 15200 | 451 | 172,8 | 24800 | 24960 |



Build your own code:

Your Code: MP27.70

Example Code:

MP27.70**C-115-S-3-O-T-BL**

| Structure | Length | Watt Power | Kelvin | Optic Diffuser | Driver | Body Color |
|-----------|------------|------------|----------|----------------|----------|------------|
| C | 115 | S | 3 | O | T | BL |
| Structure | Length | Watt Power | Kelvin | Optic Diffuser | Driver | Body Color |



Opal Diffuser

Choose Technical Configurations

| Structure | Length | Watt Power | Kelvin | Optic Diffuser | Driver | Body Color |
|--|--|--|--|--|---|---|
| C = Ceiling P = Pendant | 059 = 59 087 = 87 115 = 115 143 = 143 171 = 171 199 = 199 227 = 227 255 = 255 283 = 283 311 = 311 339 = 339 367 = 367 395 = 395 423 = 423 451 = 451 | S = Standart H = High | 3 = 3.000K 4 = 4.000K | O = Opal Diffuser MP = Honeycomb Diffuser | OF = ON-OFF D = Dali T = Triac | WH = White BL = Black GR = Grey SR = Special Ral |





Honeycomb Diffuser



TUYA SWITCH
77-50498-40
Only with Triac Driver

*You can only choose from the choices above

MP27.70 Ceiling

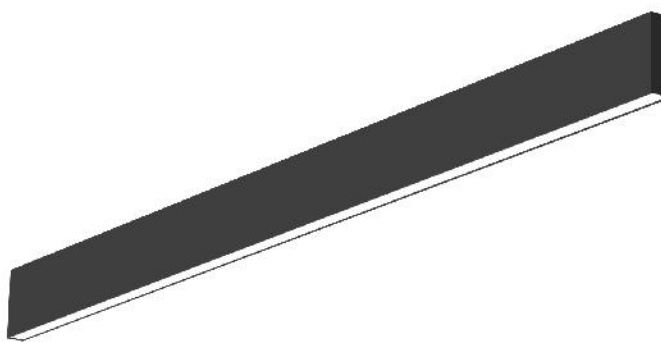

MP27.70 CEILING BLACK

STANDART WATT

| Length (cm) | Code On/off | Description Code | Watt | Lumen | On/off | Triac |
|-------------|--------------|--------------------------|-------|-------|--------|-------|
| 59 | 77-15034-66 | MP27.70C-059-S-3-O-OF-BL | 12,6 | 1880 | 66 | 66 |
| 87 | 77-15098-70 | MP27.70C-087-S-3-O-OF-BL | 18,9 | 2820 | 70 | 70 |
| 115 | 77-15162-77 | MP27.70C-115-S-3-O-OF-BL | 25,2 | 3760 | 77 | 77 |
| 143 | 77-15226-86 | MP27.70C-143-S-3-O-OF-BL | 31,5 | 4700 | 86 | 86 |
| 171 | 77-15290-96 | MP27.70C-171-S-3-O-OF-BL | 37,8 | 5640 | 96 | 96 |
| 199 | 77-15354-110 | MP27.70C-199-S-3-O-OF-BL | 44,1 | 6580 | 110 | 110 |
| 227 | 77-15418-116 | MP27.70C-227-S-3-O-OF-BL | 50,4 | 7520 | 116 | 116 |
| 255 | 77-15482-120 | MP27.70C-255-S-3-O-OF-BL | 56,7 | 8460 | 120 | 120 |
| 283 | 77-15546-124 | MP27.70C-283-S-3-O-OF-BL | 63 | 9400 | 124 | 124 |
| 311 | 77-15610-142 | MP27.70C-311-S-3-O-OF-BL | 69,3 | 10340 | 142 | 142 |
| 339 | 77-15674-152 | MP27.70C-339-S-3-O-OF-BL | 75,6 | 11280 | 152 | 152 |
| 367 | 77-15738-156 | MP27.70C-367-S-3-O-OF-BL | 81,9 | 12220 | 156 | 156 |
| 395 | 77-15802-172 | MP27.70C-395-S-3-O-OF-BL | 88,2 | 13160 | 172 | 172 |
| 423 | 77-15866-186 | MP27.70C-423-S-3-O-OF-BL | 94,5 | 14100 | 186 | 186 |
| 451 | 77-15930-206 | MP27.70C-451-S-3-O-OF-BL | 100,8 | 15040 | 206 | 206 |

HIGH WATT

| Length (cm) | Code On/off | Description Code | Watt | Lumen | On/off | Triac |
|-------------|--------------|--------------------------|-------|-------|--------|-------|
| 59 | 77-15038-70 | MP27.70C-059-H-3-O-OF-BL | 21,6 | 3100 | 70 | 70 |
| 87 | 77-15102-82 | MP27.70C-087-H-3-O-OF-BL | 32,4 | 4650 | 82 | 82 |
| 115 | 77-15166-88 | MP27.70C-115-H-3-O-OF-BL | 43,2 | 6200 | 88 | 88 |
| 143 | 77-15230-100 | MP27.70C-143-H-3-O-OF-BL | 54 | 7750 | 100 | 100 |
| 171 | 77-15294-120 | MP27.70C-171-H-3-O-OF-BL | 64,8 | 9300 | 120 | 120 |
| 199 | 77-15358-130 | MP27.70C-199-H-3-O-OF-BL | 75,6 | 10850 | 130 | 130 |
| 227 | 77-15422-138 | MP27.70C-227-H-3-O-OF-BL | 86,4 | 12400 | 138 | 138 |
| 255 | 77-15486-146 | MP27.70C-255-H-3-O-OF-BL | 97,2 | 13950 | 146 | 146 |
| 283 | 77-15550-150 | MP27.70C-283-H-3-O-OF-BL | 108 | 15500 | 150 | 150 |
| 311 | 77-15614-168 | MP27.70C-311-H-3-O-OF-BL | 118,8 | 17050 | 168 | 168 |
| 339 | 77-15678-172 | MP27.70C-339-H-3-O-OF-BL | 129,6 | 18600 | 172 | 172 |
| 367 | 77-15742-206 | MP27.70C-367-H-3-O-OF-BL | 140,4 | 20150 | 206 | 206 |
| 395 | 77-15806-260 | MP27.70C-395-H-3-O-OF-BL | 151,2 | 21700 | 260 | 260 |
| 423 | 77-15870-270 | MP27.70C-423-H-3-O-OF-BL | 162 | 23250 | 270 | 270 |
| 451 | 77-15934-296 | MP27.70C-451-H-3-O-OF-BL | 172,8 | 24800 | 296 | 296 |

Ability to select Kelvin, changing the **3** (3000K) to **4** (4000K), if you wish your lighting to be 4000k than 3000k.
 Ability to select between Opal or Honeycomb, changing the **O** (OPAL) to **MP** (HONEYCOMB), according to your desire.
 Ability to select Driver Triac or Dali, changing the **OF** (ON/OFF) to **T** (TRIAC) or **D** (DALI), according to your desire of Driver.
 Ability to select Color, changing the **BL** (BLACK) to **WH** (WHITE), **GR** (GREY) or **SR** (SPECIAL RAL), according to your desire.

Price Catalogue Explanation


For Honeycomb from length 059-115 extra 6€ to the price catalogue, from 143-227 extra 12€, from 255-339 extra 18€ and from 367-451 extra 24€. For Drivers the prices are on the list. For Special Ral extra 10% to the price catalogue.

To build your personal code you can visit our site www.masterlighting.gr or you can go to the previous page....

The price catalogue as well as the code 77-XXXXX-XXX varies according to your options.

Included all the ceiling accessories.

MP27.70 Pendant



MP27.70 PENDANT WHITE

STANDART WATT

| Length (cm) | Code On/off | Description Code | Watt | Lumen | On/off | Triac |
|-------------|--------------|---------------------------|-------|-------|--------|-------|
| 59 | 77-22612-70 | MP27.70P-059-S-3-O-OFF-WH | 12,6 | 1900 | 70 | 70 |
| 87 | 77-22675-74 | MP27.70P-087-S-3-O-OFF-WH | 18,9 | 2820 | 74 | 74 |
| 115 | 77-22739-84 | MP27.70P-115-S-3-O-OFF-WH | 25,2 | 3800 | 84 | 84 |
| 143 | 77-22803-90 | MP27.70P-143-S-3-O-OFF-WH | 31,5 | 4700 | 90 | 90 |
| 171 | 77-22867-100 | MP27.70P-171-S-3-O-OFF-WH | 37,8 | 5640 | 100 | 100 |
| 199 | 77-22931-114 | MP27.70P-199-S-3-O-OFF-WH | 44,1 | 6580 | 114 | 114 |
| 227 | 77-22995-120 | MP27.70P-227-S-3-O-OFF-WH | 50,4 | 7520 | 120 | 120 |
| 255 | 77-23059-124 | MP27.70P-255-S-3-O-OFF-WH | 56,7 | 8460 | 124 | 124 |
| 283 | 77-23123-128 | MP27.70P-283-S-3-O-OFF-WH | 63 | 9400 | 128 | 128 |
| 311 | 77-23187-146 | MP27.70P-311-S-3-O-OFF-WH | 69,3 | 10340 | 146 | 146 |
| 339 | 77-23251-156 | MP27.70P-339-S-3-O-OFF-WH | 75,6 | 11280 | 156 | 156 |
| 367 | 77-23315-160 | MP27.70P-367-S-3-O-OFF-WH | 81,9 | 12220 | 160 | 160 |
| 395 | 77-23379-176 | MP27.70P-395-S-3-O-OFF-WH | 88,2 | 13300 | 176 | 176 |
| 423 | 77-23443-190 | MP27.70P-423-S-3-O-OFF-WH | 94,5 | 14100 | 190 | 190 |
| 451 | 77-23507-210 | MP27.70P-451-S-3-O-OFF-WH | 100,8 | 15040 | 210 | 210 |

HIGH WATT

| Length (cm) | Code On/off | Description Code | Watt | Lumen | On/off | Triac |
|-------------|--------------|---------------------------|-------|-------|--------|-------|
| 59 | 77-22615-74 | MP27.70P-059-H-3-O-OFF-WH | 21,6 | 3100 | 74 | 74 |
| 87 | 77-22679-86 | MP27.70P-087-H-3-O-OFF-WH | 32,4 | 4650 | 86 | 86 |
| 115 | 77-22743-92 | MP27.70P-115-H-3-O-OFF-WH | 43,2 | 6200 | 92 | 92 |
| 143 | 77-22807-104 | MP27.70P-143-H-3-O-OFF-WH | 54 | 7750 | 104 | 104 |
| 171 | 77-22871-124 | MP27.70P-171-H-3-O-OFF-WH | 64,8 | 9300 | 124 | 124 |
| 199 | 77-22935-134 | MP27.70P-199-H-3-O-OFF-WH | 75,6 | 10850 | 134 | 134 |
| 227 | 77-22999-142 | MP27.70P-227-H-3-O-OFF-WH | 86,4 | 12480 | 142 | 142 |
| 255 | 77-23063-150 | MP27.70P-255-H-3-O-OFF-WH | 97,2 | 14040 | 150 | 150 |
| 283 | 77-23127-154 | MP27.70P-283-H-3-O-OFF-WH | 108 | 15500 | 154 | 154 |
| 311 | 77-23191-172 | MP27.70P-311-H-3-O-OFF-WH | 118,8 | 17050 | 172 | 172 |
| 339 | 77-23255-176 | MP27.70P-339-H-3-O-OFF-WH | 129,6 | 18600 | 176 | 176 |
| 367 | 77-23319-210 | MP27.70P-367-H-3-O-OFF-WH | 140,4 | 20280 | 210 | 210 |
| 395 | 77-23383-264 | MP27.70P-395-H-3-O-OFF-WH | 151,2 | 21700 | 264 | 264 |
| 423 | 77-23447-274 | MP27.70P-423-H-3-O-OFF-WH | 162 | 23250 | 274 | 274 |
| 451 | 77-23511-300 | MP27.70P-451-H-3-O-OFF-WH | 172,8 | 24800 | 300 | 300 |

Δυνατότητα επιλογής Kelvin, αλλάζοντας το **3** (3000K) σε **4** (4000K), εάν επιθυμείτε ο φωτισμός σας να είναι 4000K αντί για 3000K.
 Δυνατότητα επιλογής μεταξύ Opal ή Κυψέλης, αλλάζοντας το **O** (OPAL) σε **MP** (HONEYCOMB), σύμφωνα με την επιθυμία σας.
 Δυνατότητα επιλογής μετασχηματιστή Triac ή Dali, αλλάζοντας το **OF** (ON/OFF) σε **T** (TRIAC) ή **D** (DALI), σύμφωνα με την επιλογή σας.
 Δυνατότητα επιλογής χρώματος, αλλάζοντας το **BL** (Μαύρο) σε **WH** (Άσπρο), **GR** (Γκρι) ή **SR** (Special Ral).

Επεξήγηση Τιμοκαταλόγων



Για Κυψέλη από μήκος 059-115 επιπλέον 6€ στην τιμή καταλόγου, από μήκος 143-227 επιπλέον 12€, από μήκος 255-339 επιπλέον 18€ και από μήκος 367-451 επιπλέον 24€ στην τιμή καταλόγου. Για τους μετασχηματιστές οι τιμές βρίσκονται στη λίστα παραπάνω. Για Special Ral επιπλέον 10% στην τιμή καταλόγου.

Για να δημιουργήσετε τον προσωπικό σας κωδικό μπορείτε να επισκεφτείτε το site μας www.masterlighting.gr ή μπορείτε να πάτε στην προηγούμενη σελίδα...

Η τιμή καταλόγου καθώς και ο κωδικός 77-XXXXX-XXX διαφέρει ανάλογα με τις επιλογές σας.

Περιλαμβάνονται όλα τα εξαρτήματα ανάρτησης.

Profile - MP27.56

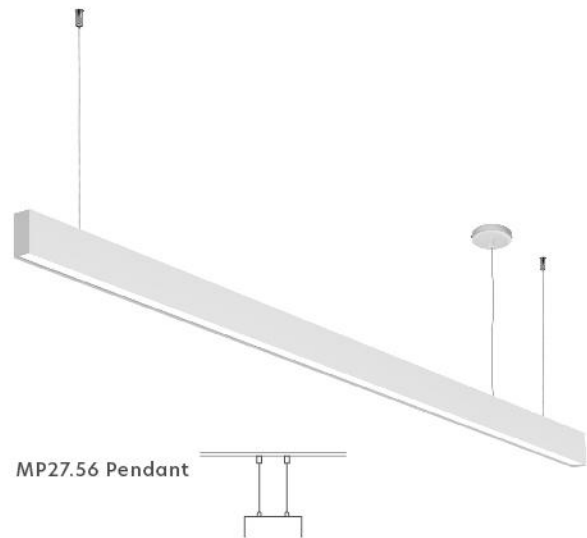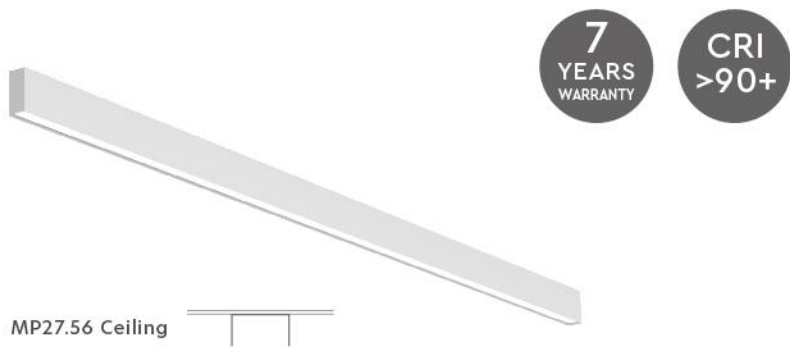

MP27.56 Pendant or Ceiling

Is a led profile luminaire, body of aluminum, painted with electrostatic paint with a matte finish. Designed for ceiling or pendant mounting, providing direct light through an opal diffuser or honeycomb. Luminaire equipped with the best quality Samsung led chips 200Lm/W and KGP drivers.

MP27.56 Κρεμαστό ή Οροφής

Είναι φωτιστικό προφίλ led, σώμα από αλουμίνιο, βαμμένο με ηλεκτροστατική βαφή με ματ φινιρίσμα. Σχεδιασμένο για τοποθέτηση σε οροφή ή κρεμαστό, παρέχοντας άμεσο φωτισμό μέσω της opal διάχυσης ή κηρήθρας. Φωτιστικό εξοπλισμένο με την καλύτερη ποιότητα. Προγράμματα οδήγησης Samsung led chips 200Lm/W και KGP.

Main Features

● Black ● White ● Grey ● Special Ral



Characteristics and Advantages

- Available from 59cm to 451cm
- Opal diffuser UGR<22 or Honeycomb UGR<15
- Beam Angle (Opal 120°, Honeycomb 30°)
- Three types of driver (ON-OFF, DALI, TRIAC with the ability TUYA)
- Coming in White, Black, Grey or optionally Special Ral
- Included 1,5m wire adjustable suspension. Request for 3m or 5m
- Low operating temperature due to excellent heat induction
- Excellent performance with low power consumption

Χαρακτηριστικά και Πλεονεκτήματα

- Διατίθεται από 59cm έως 451cm
- Διαχυτής Opal UGR<22 ή Κυψέλης UGR<15
- Γωνία δέσμης (Opal 120°, Κυψέλης 30°)
- Τρεις τύποι μετασχηματιστών (ON-OFF, DALI, TRIAC με δυνατότητα TUYA)
- Διατίθεται σε λευκό, μαύρο, γκρι ή προαιρετικά Special Ral
- Περιλαμβάνεται συρμάτινη ρυθμιζόμενη ανάρτηση 1,5m. Αίτημα για 3m ή 5m.
- Χαμηλή θερμοκρασία λειτουργίας λόγω εξαιρετικής επαγωγής θερμότητας
- Εξαιρετική απόδοση με χαμηλή κατανάλωση ενέργειας

All the hanging and ceiling metal safety accessories are included.

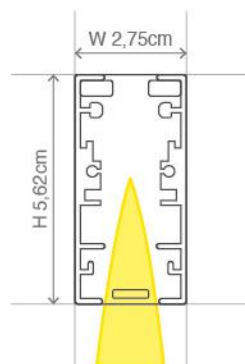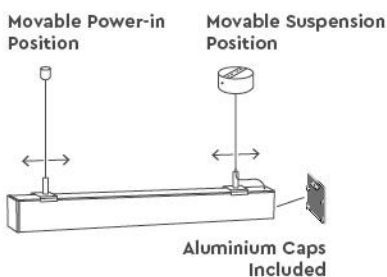

| MASTER PROFILES | | | | | | | |
|-----------------|---------------|--------------|--------------|-----------|-----------|--------------|--------------|
| Length cm | Standart Watt | | | Length cm | High Watt | | |
| | Watt | Lumen 3.000K | Lumen 4.000K | | Watt | Lumen 3.000K | Lumen 4.000K |
| 59 | 12,6 | 1880 | 1900 | 59 | 21,6 | 3100 | 3120 |
| 87 | 18,9 | 2820 | 2850 | 87 | 32,4 | 4650 | 4680 |
| 115 | 25,2 | 3760 | 3800 | 115 | 43,2 | 6200 | 6240 |
| 143 | 31,5 | 4700 | 4750 | 143 | 54 | 7750 | 7800 |
| 171 | 37,8 | 5640 | 5700 | 171 | 64,8 | 9300 | 9360 |
| 199 | 44,1 | 6580 | 6650 | 199 | 75,6 | 10850 | 10920 |
| 227 | 50,4 | 7520 | 7600 | 227 | 86,4 | 12400 | 12480 |
| 255 | 56,7 | 8460 | 8550 | 255 | 97,2 | 13950 | 14040 |
| 283 | 63 | 9400 | 9500 | 283 | 108 | 15500 | 15600 |
| 311 | 69,3 | 10340 | 10450 | 311 | 118,8 | 17050 | 17160 |
| 339 | 75,6 | 11280 | 11400 | 339 | 129,6 | 18600 | 18720 |
| 367 | 81,9 | 12220 | 12350 | 367 | 140,4 | 20150 | 20280 |
| 395 | 88,2 | 13160 | 13300 | 395 | 151,2 | 21700 | 21840 |
| 423 | 94,5 | 14100 | 14250 | 423 | 162 | 23250 | 23400 |
| 451 | 100,8 | 15040 | 15200 | 451 | 172,8 | 24800 | 24960 |



Build your own code:

Your Code: MP27.56

Example Code:

MP27.56C-227-S-3-O-D-WH

| Structure | Length | Watt Power | Kelvin | Optic Diffuser | Driver | Body Color |
|-----------|--------|------------|--------|----------------|--------|------------|
| C | 227 | S | 3 | O | D | WH |
| Structure | Length | Watt Power | Kelvin | Optic Diffuser | Driver | Body Color |



Opal Diffuser

Choose Technical Configurations

| Structure | Length | Watt Power | Kelvin | Optic Diffuser | Driver | Body Color |
|----------------------------|---|--------------------------|--------------------------|--|--------------------------------------|---|
| C = Ceiling P = Pendant | 059 = 59 087 = 87 115 = 115 143 = 143 171 = 171 199 = 199 227 = 227 255 = 255 283 = 283 311 = 311 339 = 339 367 = 367 395 = 395 423 = 423 451 = 451 | S = Standart H = High | 3 = 3.000K 4 = 4.000K | O = Opal Diffuser MP = Honeycomb Diffuser | OF = ON-OFF D = Dali T = Triac | WH = White BL = Black GR = Grey SR = Special Ral |





Honeycomb Diffuser



TUYA SWITCH
77-50498-40
Only with Triac Driver

*You can only choose from the choices above

MP27.56 Ceiling

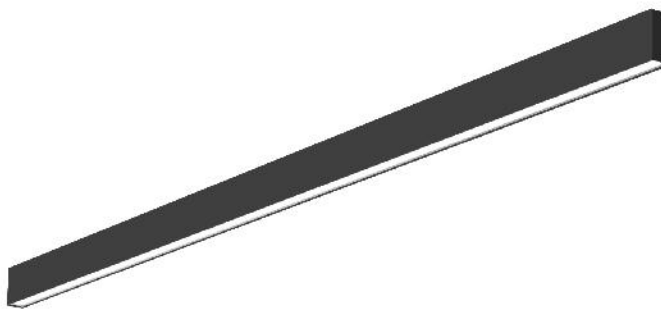

MP27.56 CEILING BLACK

STANDART WATT

| Length (cm) | Code On/off | Description Code | Watt | Lumen | On/off | Triac |
|-------------|--------------|---------------------------|-------|-------|--------|-------|
| 59 | 77-15994-60 | MP27.56C-059-S-3-O-OFF-BL | 12,6 | 1880 | 60 | 60 |
| 87 | 77-16058-62 | MP27.56C-087-S-3-O-OFF-BL | 18,9 | 2820 | 62 | 62 |
| 115 | 77-16122-70 | MP27.56C-115-S-3-O-OFF-BL | 25,2 | 3760 | 70 | 70 |
| 143 | 77-16186-72 | MP27.56C-143-S-3-O-OFF-BL | 31,5 | 4700 | 72 | 72 |
| 171 | 77-16250-80 | MP27.56C-171-S-3-O-OFF-BL | 37,8 | 5640 | 80 | 80 |
| 199 | 77-16314-92 | MP27.56C-199-S-3-O-OFF-BL | 44,1 | 6580 | 92 | 92 |
| 227 | 77-16378-96 | MP27.56C-227-S-3-O-OFF-BL | 50,4 | 7520 | 96 | 96 |
| 255 | 77-16442-98 | MP27.56C-255-S-3-O-OFF-BL | 56,7 | 8460 | 98 | 98 |
| 283 | 77-16506-100 | MP27.56C-283-S-3-O-OFF-BL | 63 | 9400 | 100 | 100 |
| 311 | 77-16570-112 | MP27.56C-311-S-3-O-OFF-BL | 69,3 | 10340 | 112 | 112 |
| 339 | 77-16634-138 | MP27.56C-339-S-3-O-OFF-BL | 75,6 | 11280 | 138 | 138 |
| 367 | 77-16698-160 | MP27.56C-367-S-3-O-OFF-BL | 81,9 | 12220 | 160 | 160 |
| 395 | 77-16762-170 | MP27.56C-395-S-3-O-OFF-BL | 88,2 | 13160 | 170 | 170 |
| 423 | 77-16826-178 | MP27.56C-423-S-3-O-OFF-BL | 94,5 | 14100 | 178 | 178 |
| 451 | 77-16890-196 | MP27.56C-451-S-3-O-OFF-BL | 100,8 | 15040 | 196 | 196 |

HIGH WATT

| Length (cm) | Code On/off | Description Code | Watt | Lumen | On/off | Triac |
|-------------|--------------|---------------------------|-------|-------|--------|-------|
| 59 | 77-15998-66 | MP27.56C-059-H-3-O-OFF-BL | 21,6 | 3100 | 66 | 66 |
| 87 | 77-16062-74 | MP27.56C-087-H-3-O-OFF-BL | 32,4 | 4650 | 74 | 74 |
| 115 | 77-16126-76 | MP27.56C-115-H-3-O-OFF-BL | 43,2 | 6200 | 76 | 76 |
| 143 | 77-16190-86 | MP27.56C-143-H-3-O-OFF-BL | 54 | 7750 | 86 | 86 |
| 171 | 77-16254-104 | MP27.56C-171-H-3-O-OFF-BL | 64,8 | 9300 | 104 | 104 |
| 199 | 77-16318-112 | MP27.56C-199-H-3-O-OFF-BL | 75,6 | 10850 | 112 | 112 |
| 227 | 77-16382-120 | MP27.56C-227-H-3-O-OFF-BL | 86,4 | 12400 | 120 | 120 |
| 255 | 77-16446-128 | MP27.56C-255-H-3-O-OFF-BL | 97,2 | 13950 | 128 | 128 |
| 283 | 77-16510-134 | MP27.56C-283-H-3-O-OFF-BL | 108 | 15500 | 134 | 134 |
| 311 | 77-16574-142 | MP27.56C-311-H-3-O-OFF-BL | 118,8 | 17050 | 142 | 142 |
| 339 | 77-16638-166 | MP27.56C-339-H-3-O-OFF-BL | 129,6 | 18600 | 166 | 166 |
| 367 | 77-16702-194 | MP27.56C-367-H-3-O-OFF-BL | 140,4 | 20150 | 194 | 194 |
| 395 | 77-16766-214 | MP27.56C-395-H-3-O-OFF-BL | 151,2 | 21700 | 214 | 214 |
| 423 | 77-16830-228 | MP27.56C-423-H-3-O-OFF-BL | 162 | 23250 | 228 | 228 |
| 451 | 77-16894-274 | MP27.56C-451-H-3-O-OFF-BL | 172,8 | 24800 | 274 | 274 |

Ability to select Kelvin, changing the **3** (3000K) to **4** (4000K), if you wish your lighting to be 4000k than 3000k.
 Ability to select between Opal or Honeycomb, changing the **O** (OPAL) to **MP** (HONEYCOMB), according to your desire.
 Ability to select Driver Triac or Dali, changing the **OF** (ON/OFF) to **T** (TRIAC) or **D** (DALI), according to your desire of Driver.
 Ability to select Color, changing the **BL** (BLACK) to **WH** (WHITE), **GR** (GREY) or **SR** (SPECIAL RAL), according to your desire.

Price Catalogue Explanation


For Honeycomb from length 059-115 extra 6€ to the price catalogue, from 143-227 extra 12€, from 255-339 extra 18€ and from 367-451 extra 24€. For Drivers the prices are on the list. For Special Ral extra 10% to the price catalogue.

To build your personal code you can visit our site www.masterlighting.gr or you can go to the previous page....

The price catalogue as well as the code 77-XXXXX-XXX varies according to your options.

Included all the ceiling accessories.

MP27.56 Pendant



MP27.56 PENDANT WHITE

STANDART WATT

| Length (cm) | Code On/off | Description Code | Watt | Lumen | On/off | Triac |
|-------------|--------------|---------------------------|-------|-------|--------|-------|
| 59 | 77-23571-64 | MP27.56P-059-S-3-O-OFF-WH | 12,6 | 1900 | 64 | 64 |
| 87 | 77-23635-66 | MP27.56P-087-S-3-O-OFF-WH | 18,9 | 2820 | 66 | 66 |
| 115 | 77-23699-74 | MP27.56P-115-S-3-O-OFF-WH | 25,2 | 3800 | 74 | 74 |
| 143 | 77-23763-76 | MP27.56P-143-S-3-O-OFF-WH | 31,5 | 4700 | 76 | 76 |
| 171 | 77-23827-84 | MP27.56P-171-S-3-O-OFF-WH | 37,8 | 5640 | 84 | 84 |
| 199 | 77-23891-96 | MP27.56P-199-S-3-O-OFF-WH | 44,1 | 6580 | 96 | 96 |
| 227 | 77-23955-100 | MP27.56P-227-S-3-O-OFF-WH | 50,4 | 7520 | 100 | 100 |
| 255 | 77-24019-102 | MP27.56P-255-S-3-O-OFF-WH | 56,7 | 8460 | 102 | 102 |
| 283 | 77-24083-104 | MP27.56P-283-S-3-O-OFF-WH | 63 | 9400 | 104 | 104 |
| 311 | 77-24147-116 | MP27.56P-311-S-3-O-OFF-WH | 69,3 | 10340 | 116 | 116 |
| 339 | 77-24211-142 | MP27.56P-339-S-3-O-OFF-WH | 75,6 | 11280 | 142 | 142 |
| 367 | 77-24275-164 | MP27.56P-367-S-3-O-OFF-WH | 81,9 | 12220 | 164 | 164 |
| 395 | 77-24339-174 | MP27.56P-395-S-3-O-OFF-WH | 88,2 | 13300 | 174 | 174 |
| 423 | 77-24403-182 | MP27.56P-423-S-3-O-OFF-WH | 94,5 | 14100 | 182 | 182 |
| 451 | 77-24467-200 | MP27.56P-451-S-3-O-OFF-WH | 100,8 | 15040 | 200 | 200 |

HIGH WATT

| Length (cm) | Code On/off | Description Code | Watt | Lumen | On/off | Triac |
|-------------|--------------|---------------------------|-------|-------|--------|-------|
| 59 | 77-23575-70 | MP27.56P-059-H-3-O-OFF-WH | 21,6 | 3100 | 70 | 70 |
| 87 | 77-23639-78 | MP27.56P-087-H-3-O-OFF-WH | 32,4 | 4650 | 78 | 78 |
| 115 | 77-23703-80 | MP27.56P-115-H-3-O-OFF-WH | 43,2 | 6200 | 80 | 80 |
| 143 | 77-23767-90 | MP27.56P-143-H-3-O-OFF-WH | 54 | 7750 | 90 | 90 |
| 171 | 77-23831-108 | MP27.56P-171-H-3-O-OFF-WH | 64,8 | 9300 | 108 | 108 |
| 199 | 77-23895-116 | MP27.56P-199-H-3-O-OFF-WH | 75,6 | 10850 | 116 | 116 |
| 227 | 77-23959-124 | MP27.56P-227-H-3-O-OFF-WH | 86,4 | 12480 | 124 | 124 |
| 255 | 77-24023-132 | MP27.56P-255-H-3-O-OFF-WH | 97,2 | 14040 | 132 | 132 |
| 283 | 77-24087-138 | MP27.56P-283-H-3-O-OFF-WH | 108 | 15500 | 138 | 138 |
| 311 | 77-24151-146 | MP27.56P-311-H-3-O-OFF-WH | 118,8 | 17050 | 146 | 146 |
| 339 | 77-24215-170 | MP27.56P-339-H-3-O-OFF-WH | 129,6 | 18600 | 170 | 170 |
| 367 | 77-24279-198 | MP27.56P-367-H-3-O-OFF-WH | 140,4 | 20280 | 198 | 198 |
| 395 | 77-24343-218 | MP27.56P-395-H-3-O-OFF-WH | 151,2 | 21700 | 218 | 218 |
| 423 | 77-24407-232 | MP27.56P-423-H-3-O-OFF-WH | 162 | 23250 | 232 | 232 |
| 451 | 77-24471-298 | MP27.56P-451-H-3-O-OFF-WH | 172,8 | 24800 | 298 | 298 |

Δυνατότητα επιλογής Kelvin, αλλάζοντας το **3** (3000K) σε **4** (4000K), εάν επιθυμείτε ο φωτισμός σας να είναι 4000K αντί για 3000K.
 Δυνατότητα επιλογής μεταξύ Opal ή Κυψέλης, αλλάζοντας το **O** (OPAL) σε **MP** (HONEYCOMB), σύμφωνα με την επιθυμία σας.
 Δυνατότητα επιλογής μετασχηματιστή Triac ή Dali, αλλάζοντας το **OF** (ON/OFF) σε **T** (TRIAC) ή **D** (DALI), σύμφωνα με την επιλογή σας.
 Δυνατότητα επιλογής χρώματος, αλλάζοντας το **BL** (Μαύρο) σε **WH** (Άσπρο), **GR** (Γκρι) ή **SR** (Special Ral).

Επεξήγηση Τιμοκαταλόγων


Για Κυψέλη από μήκος 059-115 επιπλέον 6€ στην τιμή καταλόγου, από μήκος 143-227 επιπλέον 12€, από μήκος 255-339 επιπλέον 18€ και από μήκος 367-451 επιπλέον 24€ στην τιμή καταλόγου. Για τους μετασχηματιστές οι τιμές βρίσκονται στη λίστα παραπάνω. Για Special Ral επιπλέον 10% στην τιμή καταλόγου.

Για να δημιουργήσετε τον προσωπικό σας κωδικό μπορείτε να επισκεφτείτε το site μας www.masterlighting.gr ή μπορείτε να πάτε στην προηγούμενη σελίδα...

Η τιμή καταλόγου καθώς και ο κωδικός 77-XXXXX-XXX διαφέρει ανάλογα με τις επιλογές σας.

Περιλαμβάνονται όλα τα εξαρτήματα ανάρτησης.

Spotlights and Tracks

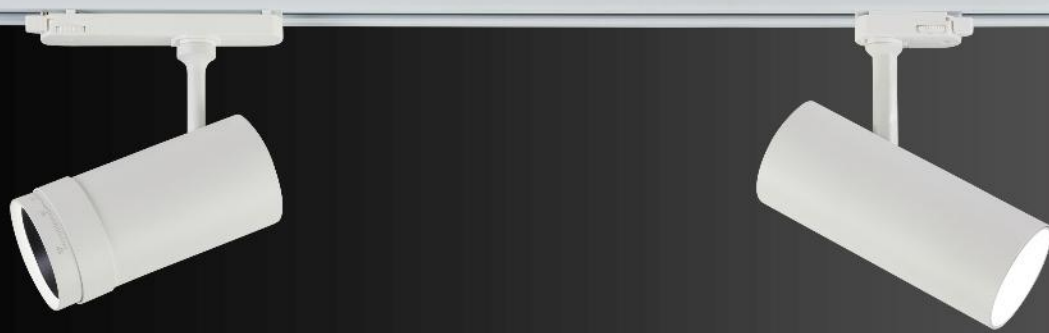



3 Phase




Zumo
77-9119-48.50



Zumo
77-9120-48.50


Zumo Led Track Light

Zumo Led Track Light Zoomable.
Black And White Aluminium Body

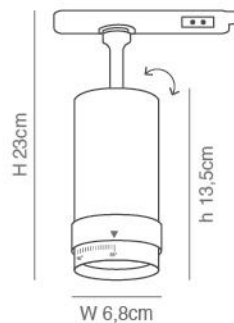

With The Ability To Select
Power Between 8,4w - 18,9w

| Pout (w) | Iout (mA) | In (A) | λ | 1 | 2 | 3 | 4 |
|----------|-----------|--------|-------|---|----|----|----|
| 8.4 | 200 | 0.10 | 0.75C | - | - | - | - |
| 10.5 | 250 | 0.11 | 0.78C | - | - | - | ON |
| 12.6 | 300 | 0.12 | 0.82C | - | - | ON | - |
| 14.7 | 350 | 0.13 | 0.83C | - | - | ON | ON |
| 16.8 | 400 | 0.14 | 0.85C | - | ON | - | - |
| 18.9 | 450 | 0.15 | 0.87C | - | ON | - | ON |

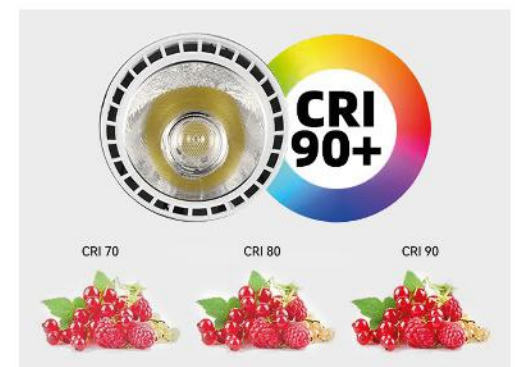

| Photo | Code | Description | Dimensions | Watt | Volt | Lumen | CCT, Kelvin | CRI | IP | Beam Angle | Adjustable | Driver | Led Chip | Phase | Dim |
|-------|---------------|--------------------------|---------------|---------------|----------|------------|-------------------|-----|----|------------|------------|--------|-----------|--------|-----|
| | 77-9119-48.50 | Zoomable Black Aluminium | 6,8x13,5x23cm | 8,4-18,9W max | 220-240V | 798-1795Lm | 3000k-4000k 5000k | >90 | 20 | 15°-55° | ✓ | KGP | Bridgelux | 3Phase | - |
| | 77-9120-48.50 | Zoomable White Aluminium | 6,8x13,5x23cm | 8,4-18,9W max | 220-240V | 798-1795Lm | 3000k-4000k 5000k | >90 | 20 | 15°-55° | ✓ | KGP | Bridgelux | 3Phase | - |



Accessories for Zumo



Fins
77-9127-10
Black



Fins
77-9128-10
White



Available with Dimmable Driver Triac for Zumo

10-100%



77-9232-12
22W 220-240V



77-9233-12
22W 220-240V



3 Phase




Zumo
77-9117-64



Zumo
77-9118-64


Zumo Led Track Light

Zumo Led Track Light Zoomable.
Black And White Aluminium Body

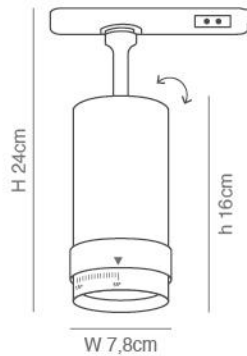

With The Ability To Select
Power Between 12,6w - 29,6w

| Pout (w) | Iout (mA) | In (A) | λ | 1 | 2 | 3 | 4 |
|----------|-----------|--------|-------|----|----|----|----|
| 12.6 | 300 | 0.12 | 0.82C | - | - | ON | - |
| 14.7 | 350 | 0.13 | 0.83C | - | - | ON | ON |
| 16.8 | 400 | 0.14 | 0.85C | - | ON | - | - |
| 18.9 | 450 | 0.15 | 0.87C | - | ON | - | ON |
| 21 | 500 | 0.16 | 0.90C | - | ON | ON | - |
| 23.1 | 550 | 0.17 | 0.92C | - | ON | ON | ON |
| 25.2 | 600 | 0.18 | 0.95 | ON | - | - | - |
| 27.3 | 650 | 0.19 | | ON | - | - | ON |
| 29.4 | 700 | 0.20 | | ON | - | ON | - |

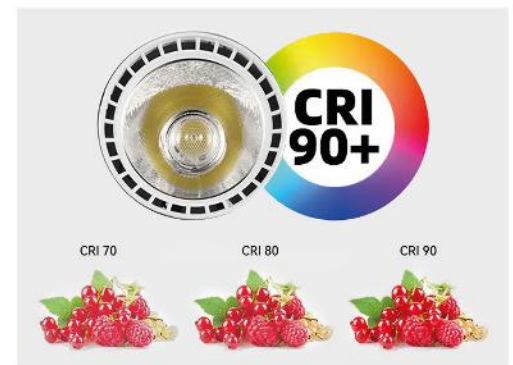

| Photo | Code | Description | Dimensions | Watt | Volt | Lumen | CCT, Kelvin | CRI | IP | Beam Angle | Adjustable | Driver | Led Chip | Phase | Dim |
|-------|------------|--------------------------|-------------|----------------|----------|-------------|-------------------|-----|----|------------|------------|--------|-----------|--------|-----|
| | 77-9117-64 | Zoomable Black Aluminium | 7,8x16x24cm | 12,6-29,4W max | 220-240V | 1197-2793Lm | 3000k-4000k 5000k | >90 | 20 | 15°-55° | ✓ | KGP | Bridgelux | 3Phase | - |
| | 77-9118-64 | Zoomable White Aluminium | 7,8x16x24cm | 12,6-29,4W max | 220-240V | 1197-2793Lm | 3000k-4000k 5000k | >90 | 20 | 15°-55° | ✓ | KGP | Bridgelux | 3Phase | - |

SUITABLE FOR ALL THE TRIO TRACKS



Accessories for Zumo



Fins
77-9125-10
Black




Fins
77-9126-10
White




Available with Dimmable Driver Triac for Zumo

10-100%



77-9230-16
32W 220-240V




77-9231-16
32W 220-240V



3 Phase






Gozo
77-9123-37

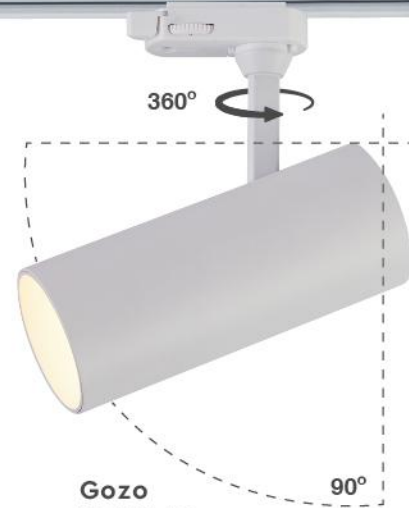

Gozo
77-9124-37

Gozo Led Track Light

Gozo Led Track Light
Black And White Aluminium Body

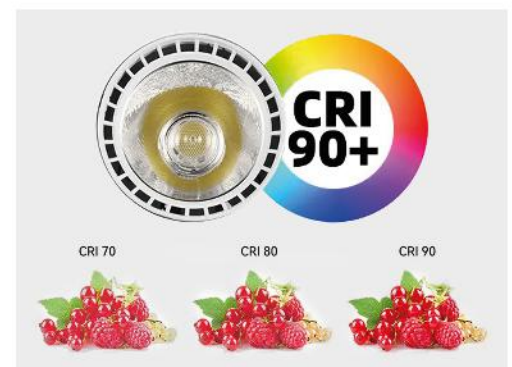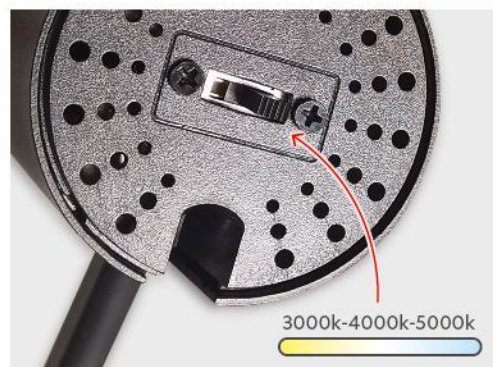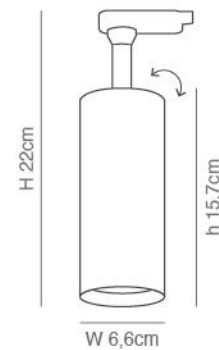

| Photo | Code | Description | Dimensions | Watt | Volt | Lumen | CCT, Kelvin | CRI | IP | Beam Angle | Adjustable | URG | Driver | Led Chip | Phase | Dim |
|-------|------------|--------------------------|---------------|------|----------|---------|-------------------|-----|----|------------|------------|-----|--------|-----------|--------|-----|
| | 77-9123-37 | Spot Led Black Aluminium | 6,6x15,7x22cm | 18W | 220-240V | 1710 Lm | 3000k-4000k-5000k | >90 | 20 | 24° | ✓ | <13 | LIFUD | Bridgelux | 3Phase | - |
| | 77-9124-37 | Spot Led White Aluminium | 6,6x15,7x22cm | 18W | 220-240V | 1710 Lm | 3000k-4000k-5000k | >90 | 20 | 24° | ✓ | <13 | LIFUD | Bridgelux | 3Phase | - |



Accessories for Gozo



ADAPTOR 1PHASE BLACK

77-9138-1.50 ●



DOWN LIGHT BASE

77-9105-5.50 ●



77-9106-5.50 ●




CEILING ROSETTE 3PHASE

77-9107-8 ●



77-9108-8 ●

Available with Dimmable Driver Triac for Gozo



77-9232-12
22W 220-240V




77-9233-12
22W 220-240V



3 Phase





Gozo
77-9121-44

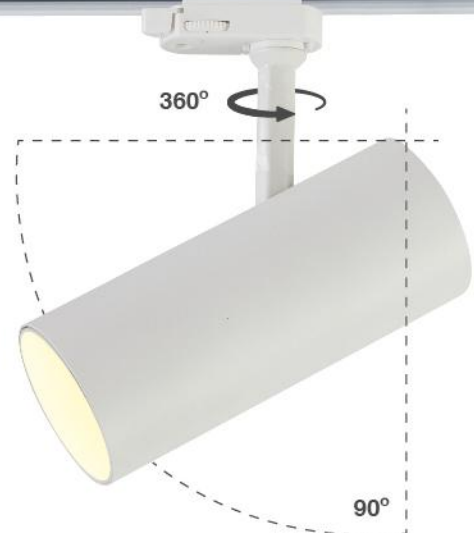

Gozo
77-9122-44

Gozo Led Track Light


Gozo Led Track Light
Black And White Aluminium Body

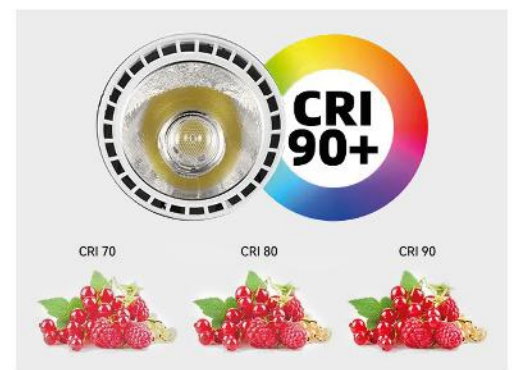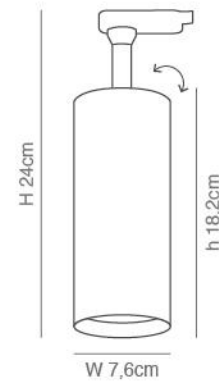

| Photo | Code | Description | Dimensions | Watt | Volt | Lumen | CCT, Kelvin | CRI | IP | Beam Angle | Adjustable | URG | Driver | Led Chip | Phase | Dim |
|-------|------------|--------------------------|---------------|------|----------|---------|-------------------|-----|----|------------|------------|-----|--------|-----------|--------|-----|
| | 77-9121-44 | Spot Led Black Aluminium | 7,6x18,2x24cm | 30W | 220-240V | 2850 Lm | 3000k-4000k-5000k | >90 | 20 | 36° | ✓ | <13 | LIFUD | Bridgelux | 3Phase | - |
| | 77-9122-44 | Spot Led White Aluminium | 7,6x18,2x24cm | 30W | 220-240V | 2850 Lm | 3000k-4000k-5000k | >90 | 20 | 36° | ✓ | <13 | LIFUD | Bridgelux | 3Phase | - |



Accessories for Gozo




ADAPTOR 1PHASE BLACK

77-9138-1.50 ●




DOWN LIGHT BASE

77-9105-5.50 ● 77-9106-5.50 ●




CEILING ROSETTE 3PHASE

77-9107-8 ● 77-9108-8 ●



Available with Dimmable Driver Triac for Gozo



77-9230-16
32W 220-240V



77-9231-16
32W 220-240V



1 Phase



5
YEARS
WARRANTY


GU10



Barillo
77-9234-13

Barillo GU10 Track Light


Barillo GU10 Track Light for 1Phase Track
Black Aluminium Body

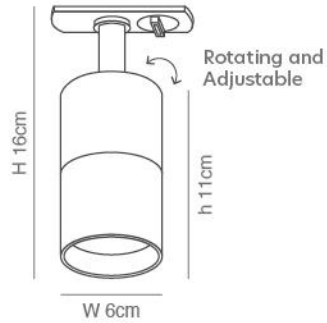

Suitable for Uno tracks


Ability to switch to 3phase
with adaptor 77-9109-6

EASY INSTALLATION BULB





Accessories for Barillo



ADAPTOR 3PHASE
77-9109-6 ●



DOWN LIGHT BASE
77-9105-5.50 ●



CEILING ROSETTE 3PHASE
77-9107-8 ●


Track Lights



Paro and Mero Track Light

Paro Track Light
Black and White Aluminium Body PAR111

Mero Track Light
Black Aluminium Body PAR5.3 GU10

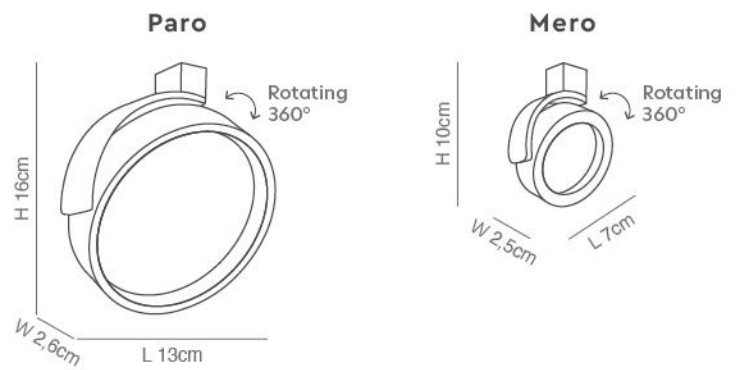



Accessories for Paro and Mero



ADAPTOR 1PHASE BLACK

77-9138-1.50 ●



ADAPTOR 3PHASE

77-9109-6 ● 77-9110-6 ●



DOWN LIGHT BASE

77-9105-5.50 ●



77-9106-5.50 ●



CEILING ROSETTE 3PHASE

77-9107-8 ●



77-9108-8 ●

Teatro Led Par111 For Paro



77-9272-24


Teatro Led Par111
Black Aluminium Body PAR111
Zoomable, 18W, 3CCT, With Switch



3 Phase - 4 Wires Tracks

Trio Tracks

Trio Track Rails 3Phase
Black and White Aluminium Body

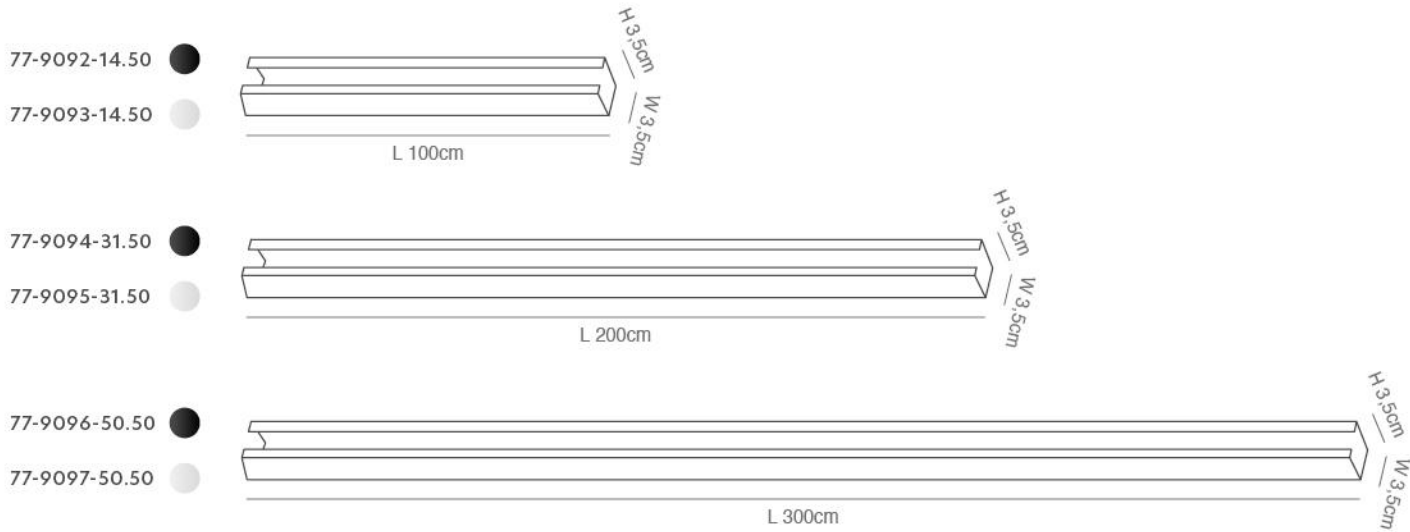

Trio Connectors

Trio Connectors 3Phase
Black and White Aluminium Body



77-9098-4
Trio Feeder Black



77-9099-4
Trio Feeder White



77-9100-0.5
Trio End Cap Black




77-9101-0.5
Trio End Cap White



77-9111-3
Trio Straight Connector Black




77-9112-3
Trio Straight Connector White

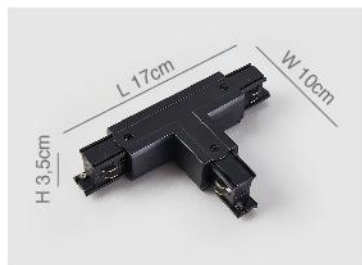

77-9113-9.50
Trio T Connector Black




77-9114-9.50
Trio T Connector White

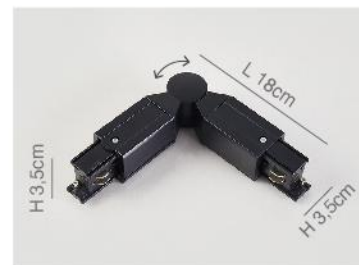

77-9115-15
Trio Adjustable Connector Black



77-9116-15
Trio Adjustable Connector White

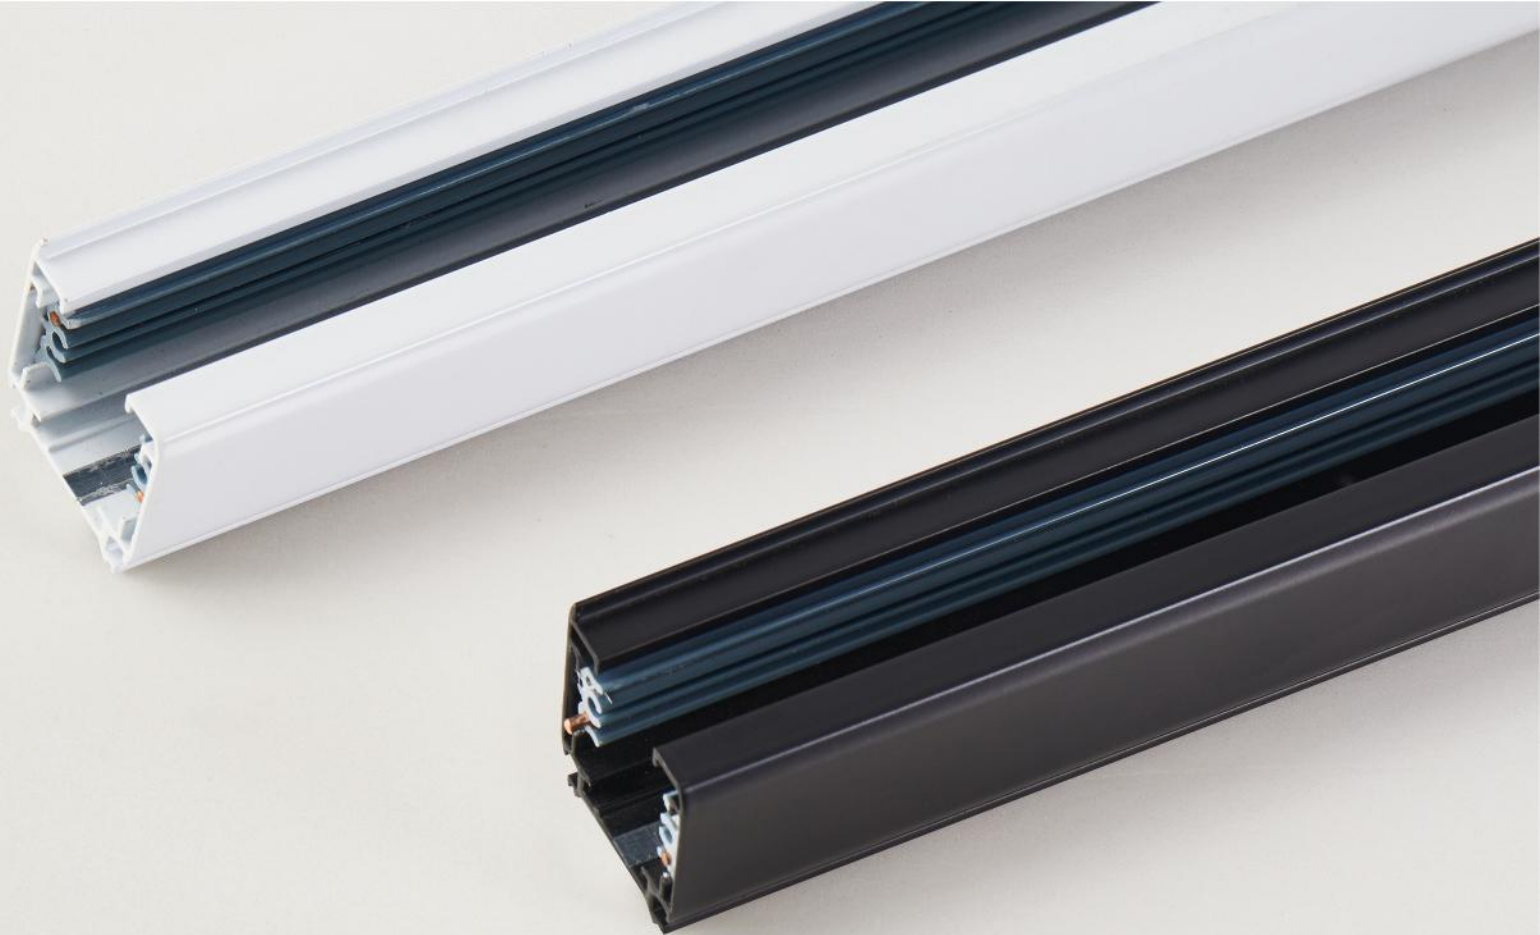

Trio Hanging Accessories


Trio Hanging Accessories 3Phase
Black and White Aluminium Body



77-9102-2.50
Trio Brackets Black




77-9103-2.50
Trio Brackets White

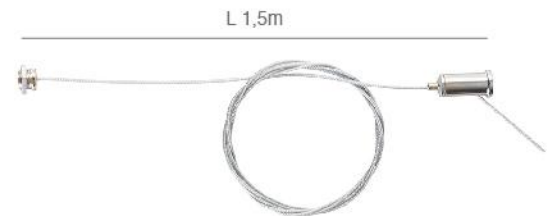

77-9104-1
Trio Wire Suspension

CREATE YOUR OWN SHAPE



EXAMPLES

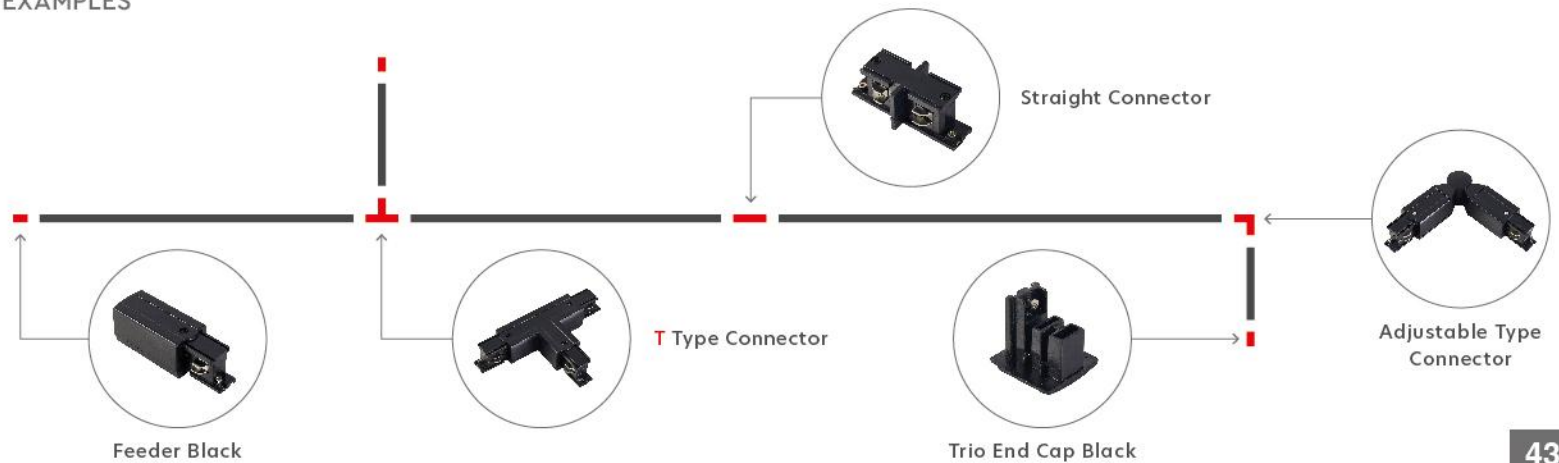

1 Phase - 2 Wires Tracks

Uno Tracks

Uno Track Rails 1Phase
Black Aluminium Body

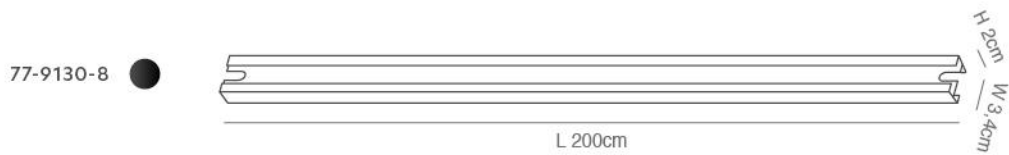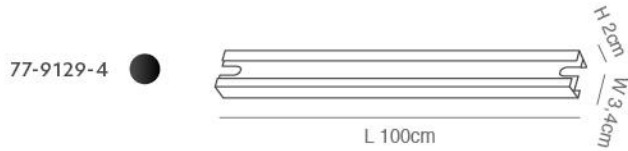

Uno Connectors


Uno Connectors 1Phase
Black Aluminium Body



77-9132-2
Uno Power Supply Cap




77-9133-0.3
Uno End Cap

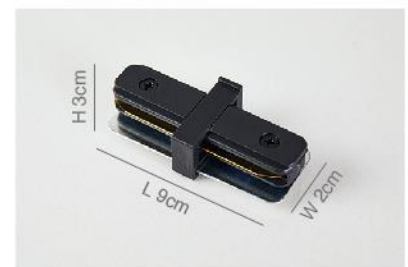


77-9134-2
Uno Straight Connector



77-9135-2
Uno 90° Corner Connector

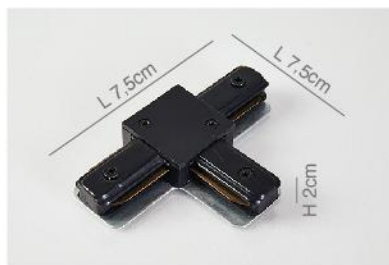

77-9136-2.50
Uno T Connector

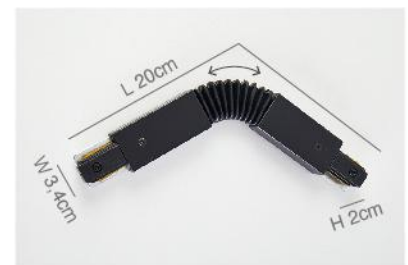

77-9137-8
Uno Flexible Connector




Hanging Accessories

Uno Hanging Accessories 1Phase
Black Aluminium Body




77-9102-2.50
Brackets Black

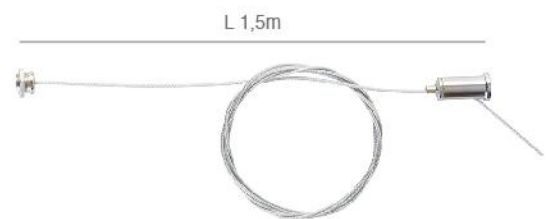

77-9104-1
Wire Suspension

CREATE YOUR OWN SHAPE

EXAMPLES

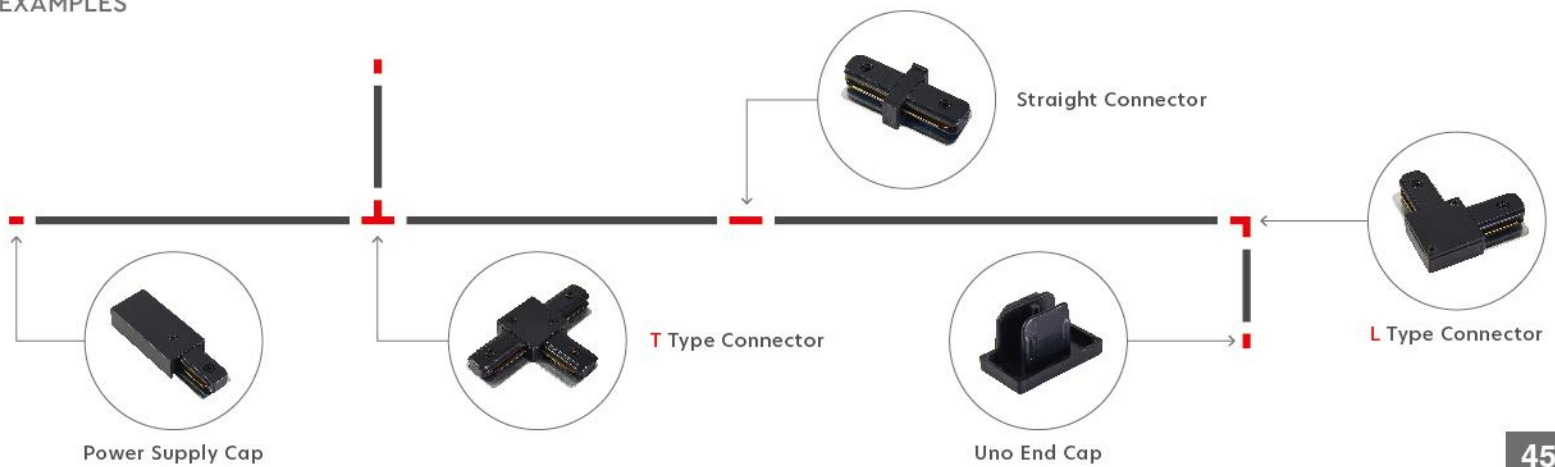

Ceiling



Bali
77-9235-10

5
YEARS
WARRANTY


GU10




Bali
77-9236-10

Bali GU10 Ceiling Spotlight

Bali GU10 Ceiling Spotlight
Black and White Aluminium Body

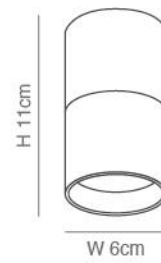

EASY INSTALLATION BULB







Cargo
77-9237-4

5
YEARS
WARRANTY


IP20



Cargo
77-9238-4

Cargo

Downlight Recessed Spot
Black and White Aluminium Body.

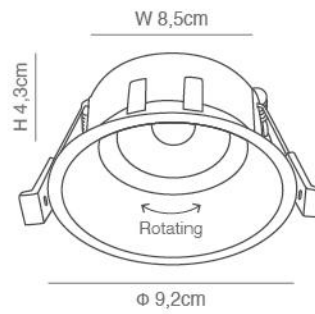


Cargo
Light Down
Led GU10 1x5Watt




Easy Installation Bulb



Ring



GU10



Done



Customize Products

Create your own spotlight by combining the cielo with any inside cup depo.

5
YEARS
WARRANTY

IP20



CIELO 77-9239 +
DEPO 77-9241



CIELO 77-9239 +
DEPO 77-9242



CIELO 77-9239 +
DEPO 77-9245



CIELO 77-9239 +
DEPO 77-9243



CIELO 77-9239
+ DEPO 77-9244



CIELO 77-9240 +
DEPO 77-9242



CIELO 77-9240 +
DEPO 77-9241



CIELO 77-9240 +
DEPO 77-9245




CIELO 77-9240 +
DEPO 77-9243



CIELO 77-9240
+ DEPO 77-9244

Cielo

Downlight Recessed Spot
Black and White Aluminium Body.



Cielo
Light Down
Led Gu10 1x5Watt
or COB 20Watt
3000k or 4000k

- Black
77-9239-4
- White
77-9240-4

Inside Cups Depo

Lighting Angle Can Be Adjusted 30°



Depo Black
77-9241-4



Depo White
77-9242-4



Depo Nickel
77-9243-5.50



Depo Gold
77-9243-5.50



Depo Copper
77-9244-5.50

Build In

First Step
Choose inside Cup Depo



Depo

Second Step
Choose COB or GU10



COB



GU10

Thirst Step
Choose the frame




Black



White

Complete



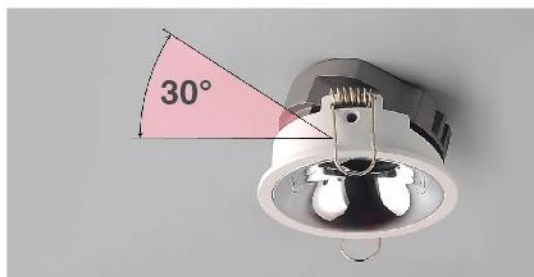

Lighting Angle Can Be Adjusted 30°

Adjustable Angle



Vertical

To the left

To the right



GUSTO
COB Zoomable
Led 20W, Black



77-9262-28
3000k

77-9263-28
4000k



KGP Triac Driver
77-50497-15
20Watt Dimmable
Un 220-240V
Uout max 55Vdc



Osram Driver
77-50496-11.50
20Watt Non Dimmable
Un 220-240V
Uout max 42Vdc

Customize Products

Create your own spotlight by combining the cielo with any inside cup cannon.

5
YEARS
WARRANTY

IP20



CIELO 77-9239 +
CANNON 77-9246



CIELO 77-9239 +
CANNON 77-9247




CIELO 77-9240 +
CANNON 77-9246



CIELO 77-9240 +
CANNON 77-9247

Cielo

Downlight Recessed Spot
Black and White Aluminium Body.

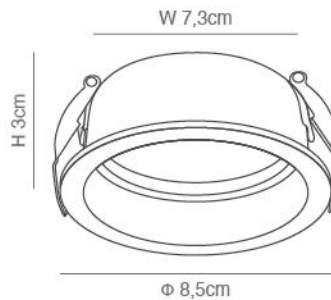

Cielo
Light Down
Led Gu10 1x5Watt
or COB 20Watt
3000k or 4000k

- Black
77-9239-4
- White
77-9240-4

Inside Cups Cannon

Lighting Angle Can Be Adjusted 30°



Cannon Black
77-9246-5



Cannon White
77-9247-5



Build In

First Step
Choose inside Cup Cannon



Cannon

Second Step
Choose COB or GU10



COB



GU10

Thirst Step
Choose the frame



Black



White

Complete





Lighting Angle Can Be Adjusted 30°

Adjustable Angle



Vertical

To the left

To the right



GUSTO
COB Zoomable
Led 20W, Black



77-9262-28
3000k

77-9263-28
4000k



KGP Triac Driver
77-50497-15
20Watt Dimmable
Un 220-240V
Uout max 55Vdc



Osram Driver
77-50496-11.50
20Watt Non Dimmable
Un 220-240V
Uout max 42Vdc

Customize Products

Create your own spotlight by combining the trixi with any inside cup depo.

5
YEARS
WARRANTY

IP20



TRIXI 77-9248 +
DEPO 77-9241



TRIXI 77-9248 +
DEPO 77-9242



TRIXI 77-9248 +
DEPO 77-9245



TRIXI 77-9248 +
DEPO 77-9243



TRIXI 77-9248 +
DEPO 77-9244



TRIXI 77-9249 +
DEPO 77-9242



TRIXI 77-9249 +
DEPO 77-9241



TRIXI 77-9249 +
DEPO 77-9245




TRIXI 77-9249 +
DEPO 77-9243



TRIXI 77-9249 +
DEPO 77-9244

Trixi

Downlight Trimless Spot
Black and White Aluminium Body.

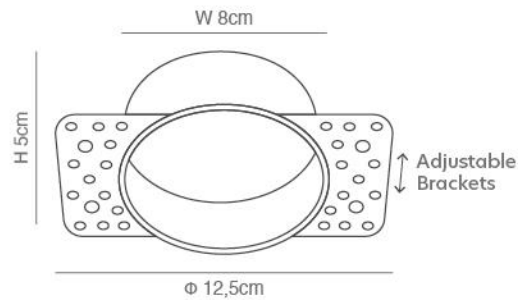

Trixi
Light Down
Led Gu10 1x5Watt
or COB 20Watt
3000k or 4000k

- Black
77-9248-5
- White
77-9249-5

Inside Cups Depo

Lighting Angle Can Be Adjusted 30°



Depo Black
77-9241-4



Depo White
77-9242-4



Depo Nickel
77-9243-5.50



Depo Gold
77-9243-5.50



Depo Copper
77-9244-5.50

Build In

First Step
Choose inside Cup Depo



Depo

Second Step
Choose COB or GU10



COB



GU10

Thirst Step
Choose the frame



Black



White

Complete





Installation Steps



GUSTO
COB Zoomable
Led 20W, Black



77-9262-28
3000k

77-9263-28
4000k



KGP Triac Driver
77-50497-15
20Watt Dimmable
Un 220-240V
Uout max 55Vdc



Osram Driver
77-50496-11.50
20Watt Non Dimmable
Un 220-240V
Uout max 42Vdc

Customize Products

Create your own spotlight by combining the trixi with any inside cup cannon.

5
YEARS
WARRANTY

IP20



TRIXI 77-9248 +
CANNON 77-9246



TRIXI 77-9248 +
CANNON 77-9247




TRIXI 77-9249 +
CANNON 77-9246



TRIXI 77-9249 +
CANNON 77-9247

Trixi

Downlight Trimless Spot
Black and White Aluminium Body.

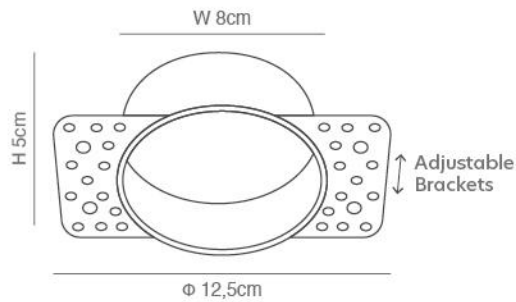

Trixi
Light Down
Led Gu10 1x5Watt
or COB 20Watt
3000k or 4000k

● Black
77-9248-5
● White
77-9249-5

Inside Cups Cannon

Lighting Angle Can Be Adjusted 30°



Cannon Black
77-9246-5



Cannon White
77-9247-5



Build In

First Step
Choose inside Cup Cannon



Cannon

Second Step
Choose COB or GU10



COB

GU10

Thirst Step
Choose the frame



Black

White

Complete





Lighting Angle Can Be Adjusted 30°


Adjustable Angle



Vertical

To the left

To the right

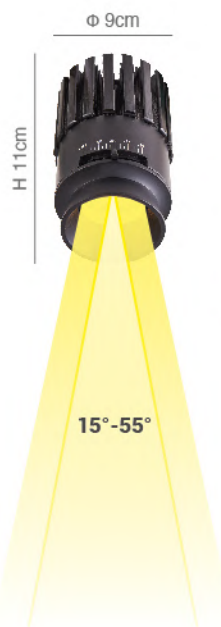

GUSTO
COB Zoomable
Led 20W, Black




77-9262-28
3000k

77-9263-28
4000k



KGP Triac Driver
77-50497-15
20Watt Dimmable
Un 220-240V
Uout max 55Vdc

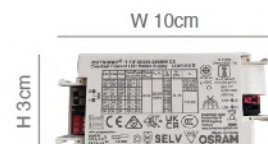


Osram Driver
77-50496-11.50
20Watt Non Dimmable
Un 220-240V
Uout max 42Vdc

Recessed-Ceiling



Mini Renno


Mini Renno Recessed or Ceiling Spot Led
Black and White Aluminium Body

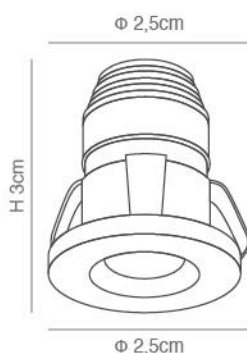

5
YEARS
WARRANTY

Movable Mavi

Movable Mavi Recessed or Ceiling
Spot Led Black and White Aluminium Body

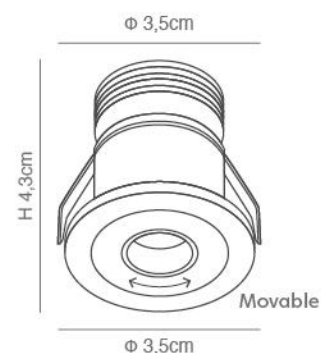

| PHOTO | CODE | DESCRIPTION | DIMENTIONS | WATT | VOLT | LUMEN | CCT | CRI | IP | BEAM ANGLE | CUT OUT |
|-------|--------------|--|---------------|------|--------------|-------|-------|-----|----|------------|---------|
| | 77-9250-9.50 | Mini Renno Recessed or Ceiling Spot Black Aluminium Body | 2,5x2,5x3cm | 2W | 220V 240V | 140Lm | 3000k | >90 | 20 | 35° | 1,5cm |
| | 77-9251-9.50 | Mini Renno Recessed or Ceiling Spot Black Aluminium Body | 2,5x2,5x3cm | 2W | 220V 240V | 140Lm | 4000k | >90 | 20 | 35° | 1,5cm |
| | 77-9252-9.50 | Mini Renno Recessed or Ceiling Spot White Aluminium Body | 2,5x2,5x3cm | 2W | 220V 240V | 140Lm | 3000k | >90 | 20 | 35° | 1,5cm |
| | 77-9253-9.50 | Mini Renno Recessed or Ceiling Spot White Aluminium Body | 2,5x2,5x3cm | 2W | 220V 240V | 140Lm | 4000k | >90 | 20 | 35° | 1,5cm |
| | 77-9254-12 | Movable Mavi Recessed or Ceiling Spot Black Aluminium Body | 3,5x3,5x4,3cm | 2W | 220V 240V | 140Lm | 3000k | >90 | 20 | 35° | 2,5cm |
| | 77-9255-12 | Movable Mavi Recessed or Ceiling Spot Black Aluminium Body | 3,5x3,5x4,3cm | 2W | 220V 240V | 140Lm | 4000k | >90 | 20 | 35° | 2,5cm |
| | 77-9254-12 | Movable Mavi Recessed or Ceiling Spot White Aluminium Body | 3,5x3,5x4,3cm | 2W | 220V 240V | 140Lm | 3000k | >90 | 20 | 35° | 2,5cm |
| | 77-9255-12 | Movable Mavi Recessed or Ceiling Spot White Aluminium Body | 3,5x3,5x4,3cm | 2W | 220V 240V | 140Lm | 4000k | >90 | 20 | 35° | 2,5cm |

Ceiling



Zoomable Joint

Zoomable and Movable Joint Ceiling Spot Led
Black and White Aluminium Body

3000k
4000k

LED

2W

F

IP20


220V
240V

CRI >90

5 YEARS WARRANTY

CE

Included Driver

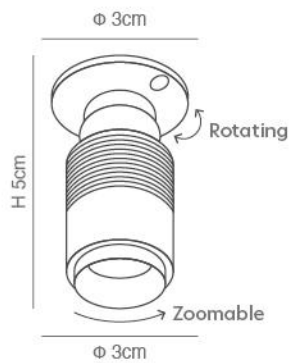


Beam Angle



| PHOTO | CODE | DESCRIPTION | DIMENSIONS | WATT | VOLT | LUMEN | CCT | CRI | IP | BEAM ANGLE |
|-------|------------|--|------------|------|--------------|-------|-------|-----|----|------------|
| | 77-9258-11 | Zoomable Joint Ceiling Spot Black Aluminium Body | 3x3x5cm | 2W | 220V 240V | 140Lm | 3000k | >90 | 20 | 15-35° |
| | 77-9259-11 | Zoomable Joint Ceiling Spot Black Aluminium Body | 3x3x5cm | 2W | 220V 240V | 140Lm | 4000k | >90 | 20 | 15-35° |
| | 77-9260-11 | Zoomable Joint Ceiling Spot White Aluminium Body | 3x3x5cm | 2W | 220V 240V | 140Lm | 3000k | >90 | 20 | 15-35° |
| | 77-9261-11 | Zoomable Joint Ceiling Spot White Aluminium Body | 3x3x5cm | 2W | 220V 240V | 140Lm | 4000k | >90 | 20 | 15-35° |

Available package of three of each item | The driver is included

Gypsum Recessed Spot

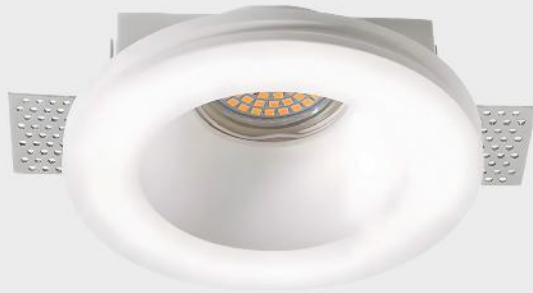

Yeso
77-9264-5




5
YEARS
WARRANTY

IP20



Yeso
77-9265-5

Yeso
Downlight Recessed Spot
White Gypsum Body
Led GU10 1X5 Watt

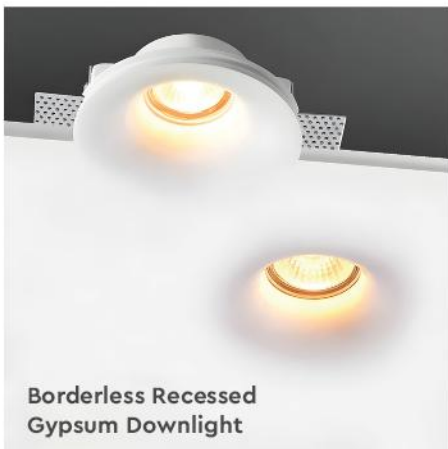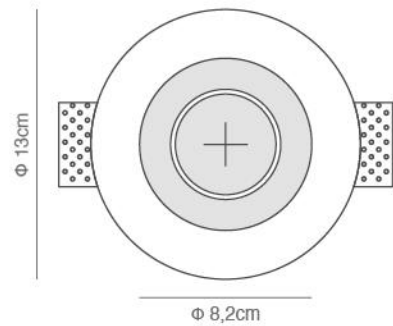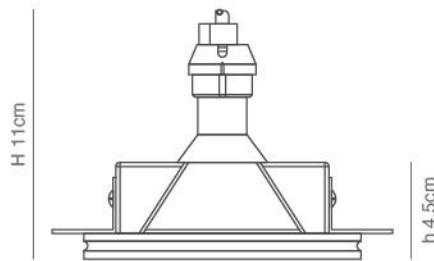

**Borderless Recessed
Gypsum Downlight**



Stainless Steel Fixed Mesh Plate



Easy Installation Bulb



Magnetic Flex Series





The new era of Magnetic Track Lighting is here. Enjoy all the professional lighting benefits without any pre-installation requirements and ceiling cuttings. Surface Mounted Magnetic Lighting System with Ultra Slim Design for maximum space utilization. Ideal for hotels, café-bars, stores and home usage. Smart App system is also available for individual brightness and Kelvin adjustment. Re-evaluate your lighting needs and customize your space decoration in the easiest way.




Magnetic Flex Track

Slim Surface Mounted Aluminum Black Rail
Male-Female Micro USB Connectors



Includes Micro USB Connectors

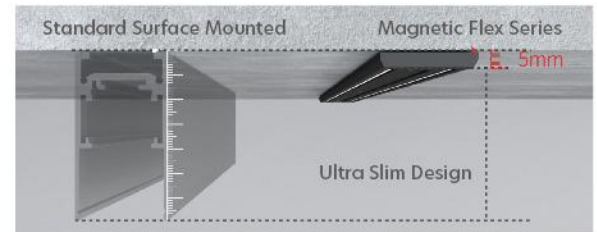

77-8989-16 L 30cm




77-8990-24 L 60cm



77-8991-33 L 120cm

Connectors Micro USB



77-8993-11
Four way female X connector



77-8992-8
Corner female L connector




77-8995-8
Male connector
Converting female to male




Magnetic Flex Driver

LED Surface Mountain Driver
100W AC220V to 48V
Includes Male-Female
Micro USB Connectors

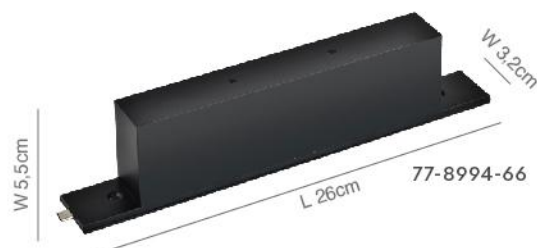

77-8994-66



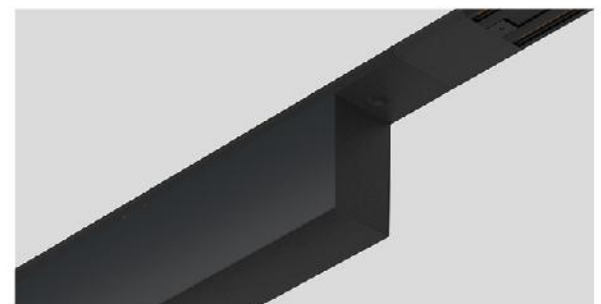







Magnetic Flex Lightings

Surface Mounted Black Aluminum and PC
Magnetic Lighting System

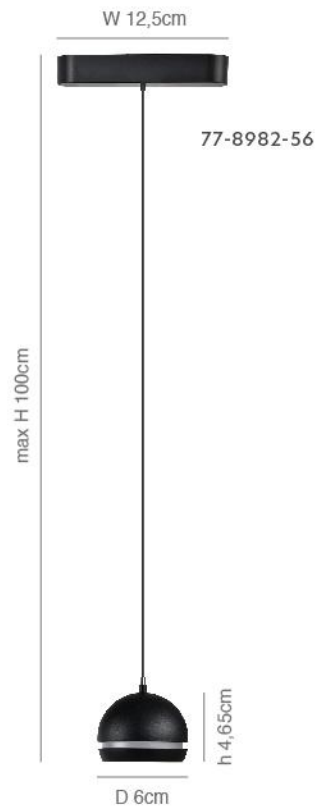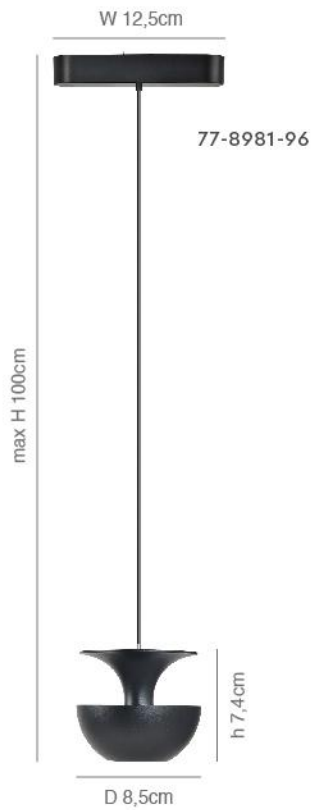

| PHOTO | CODE | DESCRIPTION | WATT | VOLT | LUMEN | CCT | CRI | IP | BEAM ANGLE | DIM. | TUYA |
|-------|------------|---|------|------|--------|-------|-----|----|------------|------|------|
| | 77-8975-36 | Led Linear Light Black Aluminium 30x3cm | 6W | 48V | 480Lm | 3000k | >90 | 20 | 120 | - | - |
| | 77-8976-46 | Led Linear Light Black Aluminium 60x3cm | 8W | 48V | 960Lm | 3000k | >90 | 20 | 120 | - | - |
| | 77-8977-65 | Led Linear Light Black Aluminium 115x3cm | 12W | 48V | 1600Lm | 3000k | >90 | 20 | 120 | - | - |
| | 77-8981-96 | Led Pendant Light Black Aluminium 100x8,5x7,4cm | 8W | 48V | 640Lm | 3000k | >90 | 20 | 36 | - | - |
| | 77-8982-56 | Led Pendant Light Black Aluminium 100x6x4,65cm | 6W | 48V | 480Lm | 3000k | >90 | 20 | 110 | - | - |
| | 77-8980-48 | Led Spot Lightblack Aluminium 18x12,5x14cm | 12W | 48V | 960Lm | 3000k | >90 | 20 | 36 | - | - |
| | 77-8978-34 | Led Spot Lightblack Aluminium 13x3x6,5cm | 8W | 48V | 640Lm | 3000k | >90 | 20 | 36 | - | - |
| | 77-8979-39 | Led Spot Light Black Aluminium 18x12,5x14cm | 12W | 48V | 960Lm | 3000k | >90 | 20 | 36 | - | - |

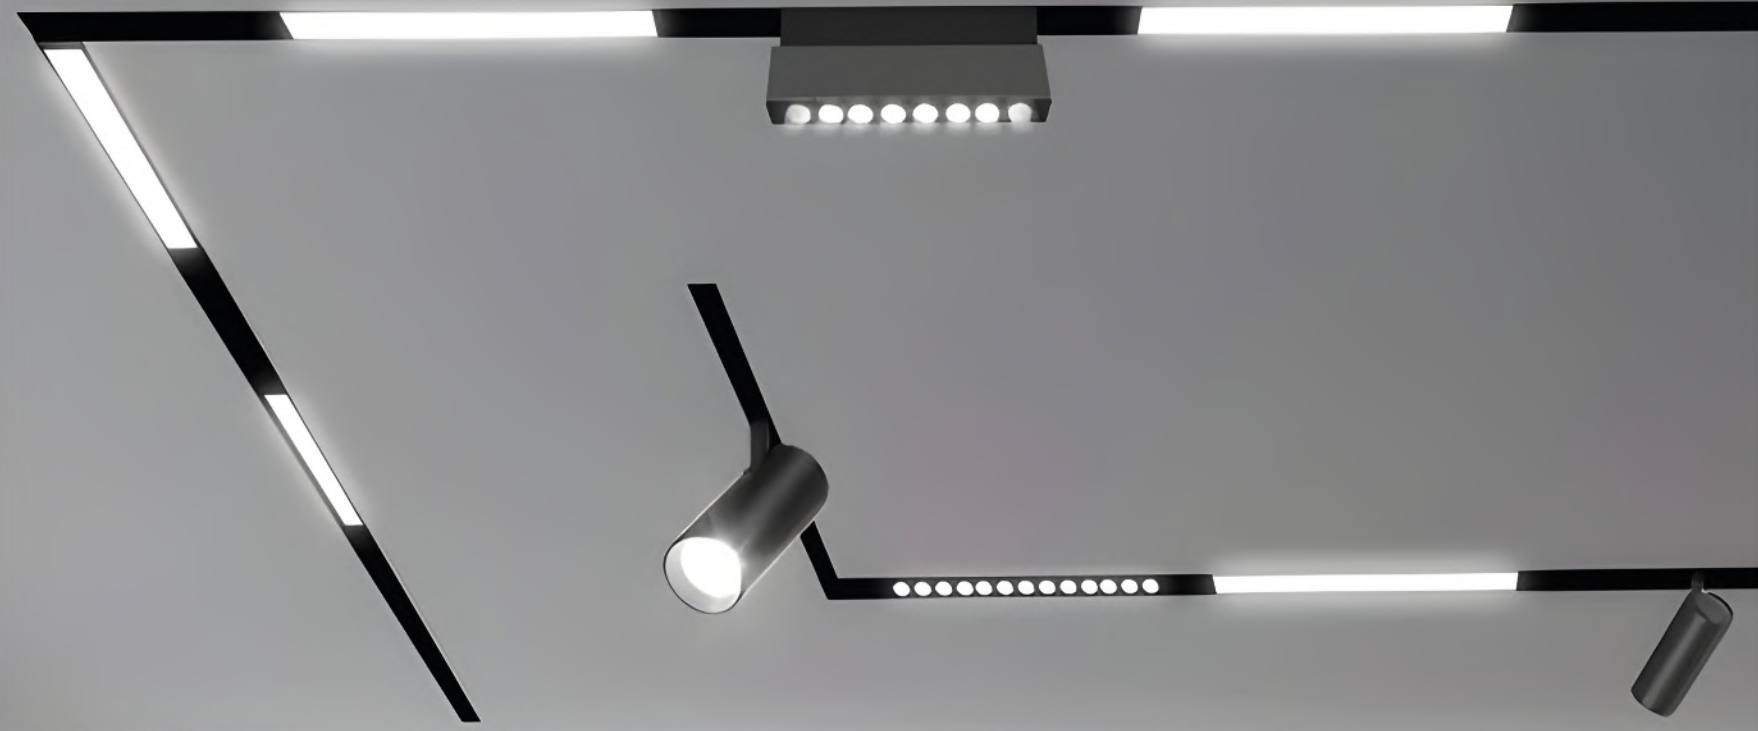



Independent lighting control

Easy connect
via app
voice control

2700k-6000k

Available on the App Store

Works with Amazon Alexa

ANDROID APP ON Google Play

Works with Google Assistant



Magnetic Flex Smart Lightings

Surface Mounted Black Aluminum and PC
Magnetic Lighting System



77-8983-84

L 60cm

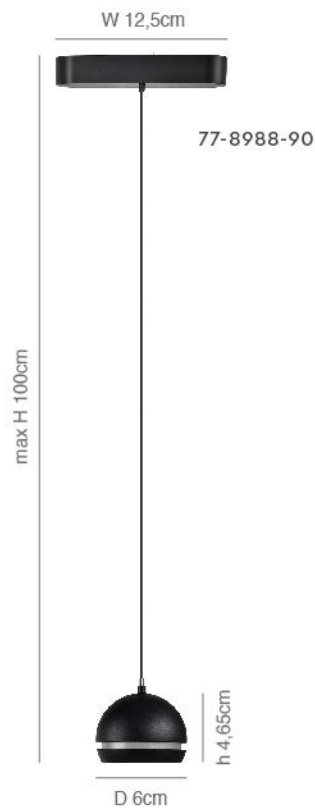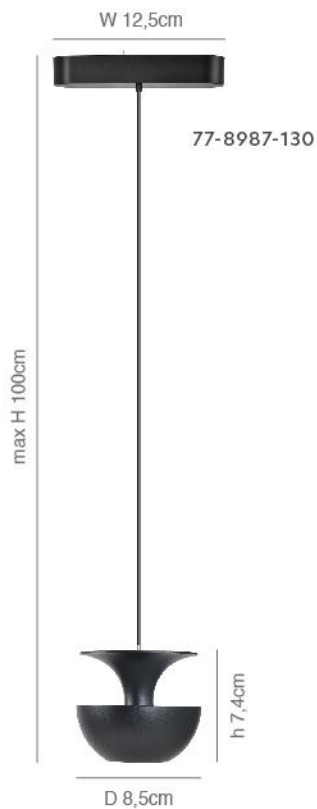

| PHOTO | CODE | DESCRIPTION | WATT | VOLT | LUMEN | CCT | CRI | IP | BEAM ANGLE | DIM. | TUYA |
|-------|-------------|---|------|------|-------|-------------|-----|----|------------|------|------|
| | 77-8983-84 | Smart Led Linear Light Black Aluminium 60x3cm | 12W | 48V | 960Lm | 2700k-6000k | >90 | 20 | 120 | ✓ | ✓ |
| | 77-8987-130 | Smart Led Pendant Light Black Aluminium 100x8,5x7,4cm | 8W | 48V | 640Lm | 2700k-6000k | >90 | 20 | 36 | ✓ | ✓ |
| | 77-8986-81 | Smart Led Pendant Light Black Aluminium 100x6x4,65cm | 6W | 48V | 480Lm | 2700k-6000k | >90 | 20 | 110 | ✓ | ✓ |
| | 77-8984-68 | Smart Led Spot Light Black Aluminium 18x12,5x14cm | 12W | 48V | 960Lm | 2700k-6000k | >90 | 20 | 36 | ✓ | ✓ |
| | 77-8982-56 | Smart Led Spot Light Black Aluminium 13x3x6,5cm | 8W | 48V | 640Lm | 2700k-6000k | >90 | 20 | 36 | ✓ | ✓ |
| | 77-8985-70 | Smart Led Spot Light Black Aluminium 18x12,5x14cm | 12W | 48V | 960Lm | 2700k-6000k | >90 | 20 | 36 | ✓ | ✓ |




Linear Slim Series





The Linear Slim series has just arrived.
An innovative atmospheric lighting for your space.
Linear led surface light with possibility of rotation,
as well as perspective to create any geometric shape you desire.



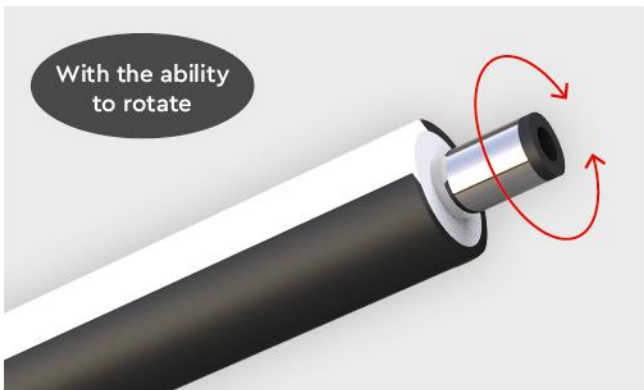


Linear Slim Lightings

Linear Slim Surface Mounted
Rotatable Aluminium Black



| PHOTO | CODE | DESCRIPTION | WATT | VOLT | LUMEN | CCT | CRI | IP | BEAM ANGLE | DIM. | TUYA |
|-------|------------|--|------|------|--------|-------|-----|----|------------|------|------|
| | 77-9071-35 | SM-1050-10 Linear Slim Led Lighting All Black Aluminium 105x1,5cm | 10W | 24V | 1050Lm | 3000k | >90 | 44 | 120 | ✓ | - |
| | 77-9072-48 | SM-1550-15 Linear Slim Led Lighting All Black Aluminium 155x1,5cm | 15W | 24V | 1550Lm | 3000k | >90 | 44 | 120 | ✓ | - |
| | 77-9073-62 | SM-2050-20 Linear Slim Led Lighting All Black Aluminium 205x1,5cm | 20W | 24V | 2100Lm | 3000k | >90 | 44 | 120 | ✓ | - |

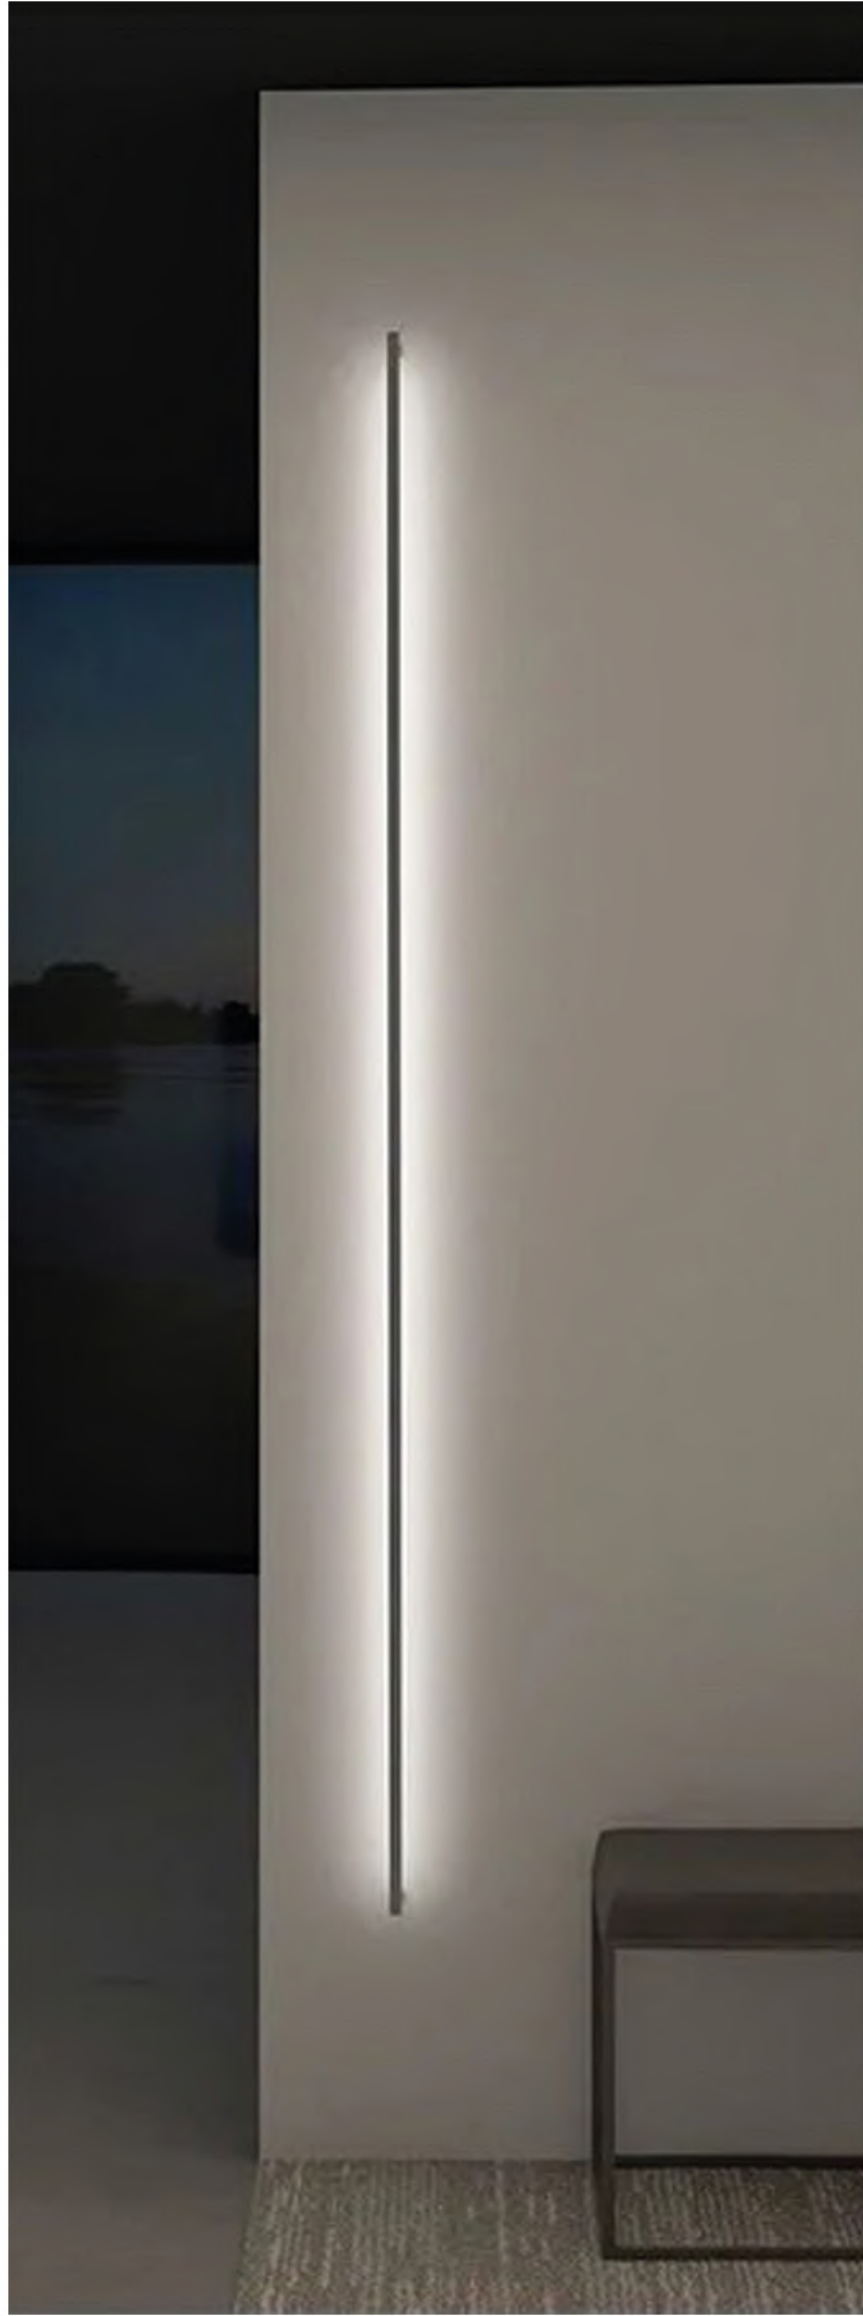

Linear Slim Accessories



77-9074-14
Male Head Input
Connector



77-9075-14
Female Head Input
Connector



77-9076-14
Cross Connector



77-9077-14
Upper and Lower
Wall Connector



77-9078-14
T-Shaped Downward
Connector



77-9079-14
T-Type Left Female
Connector



77-9080-14
Middle Connector



77-9081-14
L-Type Left Male
Connector

Linear Slim Drivers

Linear Slim Driver With Switch All Black Aluminium



You can choose any other Driver 24V



77-9082-85
60watt, 24V



77-9083-132
150watt, 24V




CREATE YOUR OWN SHAPE

EXAMPLES



77-9071-35 x4pcs
77-9079-14 x4pcs





77-9071-35 x2pcs, 77-9073-62 x1pcs
77-9074-14 x1pcs, 77-9075-14 x1pcs
77-9079-14 x1pcs, 77-9081-14 x1pcs



77-9072-48 x3pcs
77-9078-14 x1pcs
77-9074-14 x2pcs
77-9075-14 x1pcs



77-9071-35 x3pcs, 77-9074-14 x1pcs
77-9079-14 x1pcs, 77-9075-14 x1pcs
77-9081-14 x1pcs, 77-9079-14 x1pcs

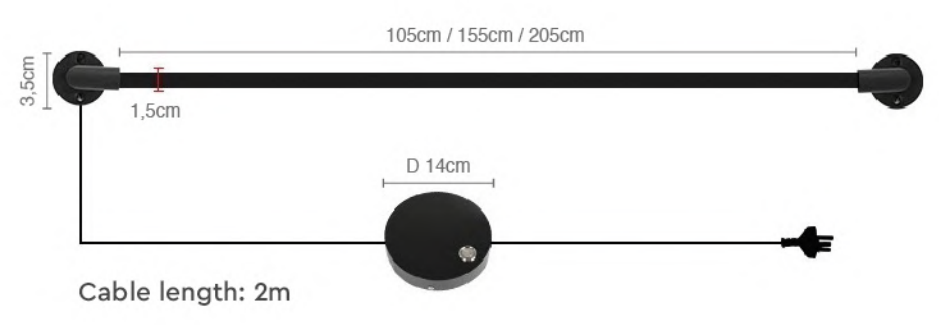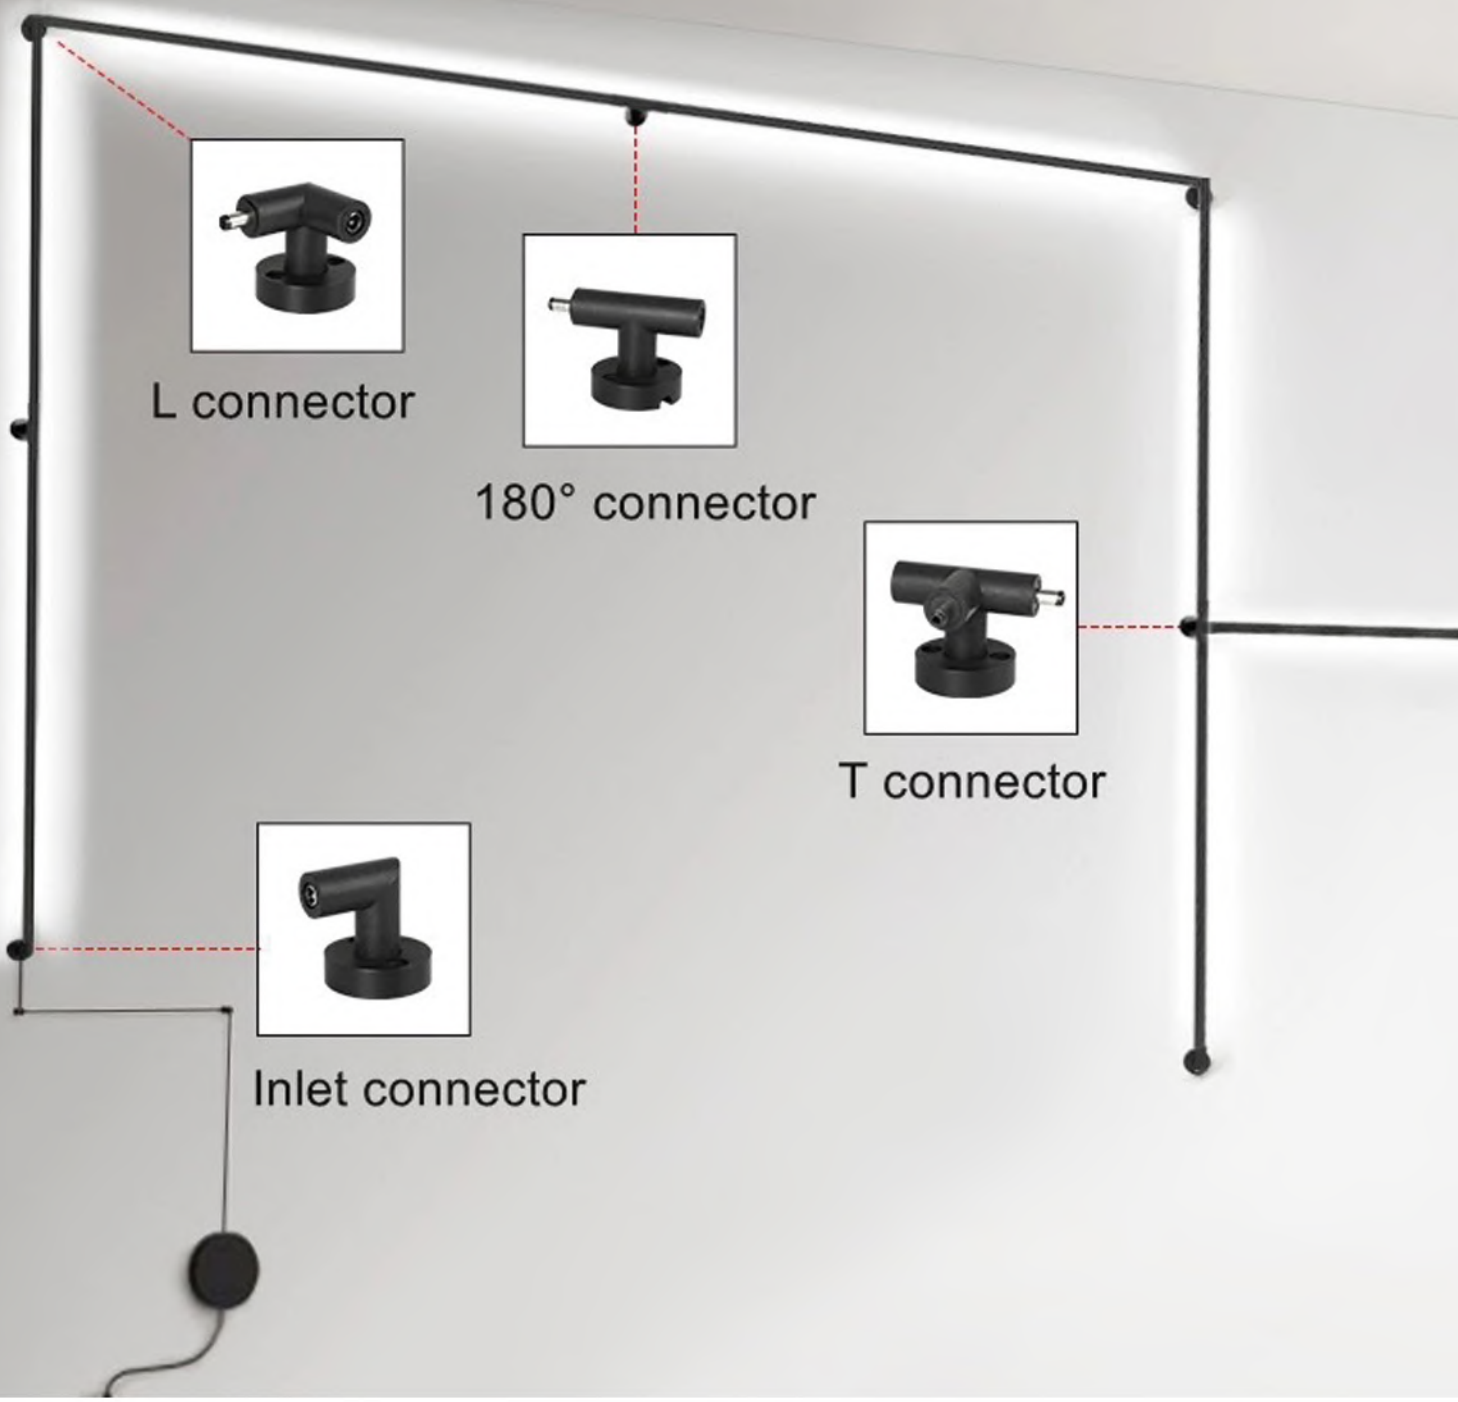



Cubo
77-9271-25

5
YEARS
WARRANTY


IP54

Cubo

Led Wall lamp
Dark Grey Aluminium Body



3000k IP54 F 220V/240V 5W*2 5 YEARS WARRANTY

dimming CE



77-9271-25
Light Up-Down
LED 2x5Watt

Adjustable Beam Angle

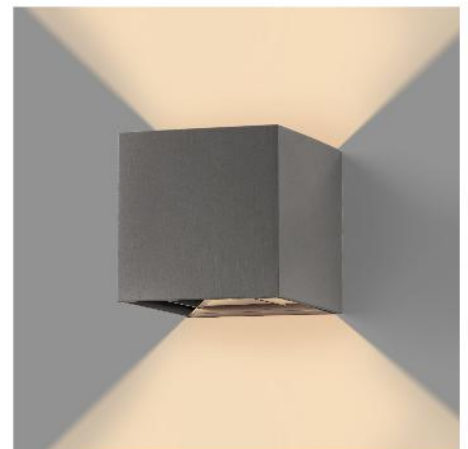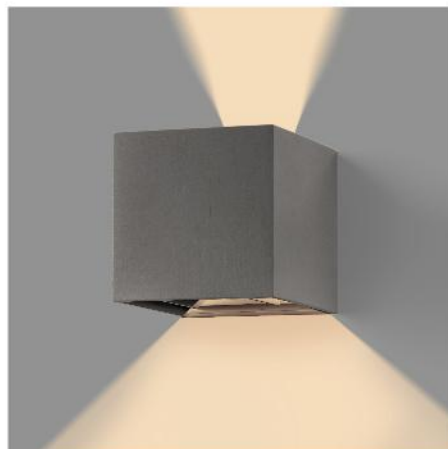





Cuadro
77-9269-9


5
YEARS
WARRANTY

IP65




Cuadro
77-9270-12

Cuadro
Wall Lamp
Dark Grey Aluminium Body



77-9269-9
Light Down
LED GU10 1x5Watt

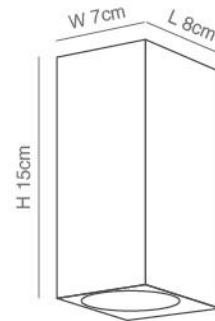

77-9270-12
Light Up-Down
LED GU10 2x5Watt





General Information

1. This catalogue cancels the previous one.
2. The products always travel at the risk of purchaser. Any claim for damage must be made by registration letter within 48 Hours of receipt of goods.
3. The products are being transferred in boxes, which are designed to ensure safe transportation. Customized packing is made for our special constructions.
4. Information and details, as shown in the present catalogue are indicative and in no way binding. Homelighting reserves the right , at any time and without notice , to modify and customize products in accordance with the CE standards.
5. The product pictures and ambiances in this catalogue can deviate from reality and they do not necessarily concur with the usual application of the product.
6. In every code 77-XXXX-XXX, the digits after the second dash are the price catalogue, from there you calculate your discount.
For example 77-8089-41, the price catalogue is 41 euros.
7. In the linear profiles , the numbers that are shown below the columns On/off, Dali and Triac are the price catalogue of the products.
For example :

| MP61.70 CEILING BLACK | | | | | | | |
|-----------------------|-------------|---------------------------|------|-------|--------|-------|------|
| STANDART WATT | | | | | | | |
| Length (cm) | Code On/off | Description Code | Watt | Lumen | On/off | Triac | Dali |
| 59 | 77-9274-64 | MP61.70C-059-5-3-O-OFF-BL | 12,6 | 1880 | 64 | 70 | 96 |

The price catalogue for the product with driver on/off is 64 euros, with Dali driver is 96 euros and with Triac is 70 euros. The 77-9274-64, corresponds for the On/off driver.

Γενικές Πληροφορίες

1. Αυτός ο κατάλογος ακυρώνει τον προηγούμενο.
2. Τα προϊόντα ταξιδεύουν με ευθύνη του παραλήπτη. Για οποιαδήποτε απαίτηση λόγω ζημιάς πρέπει να υποβληθεί επιστολή εντός 48 ωρών από την παραλαβή των εμπορευμάτων.
3. Τα προϊόντα ταξιδεύουν σε κουτιά τα οποία είναι σχεδιασμένα για να διασφαλίζουν την μεταφορά. Οι κατασκευές μεταφέρονται με ειδικό πακετάρισμα.
4. Πληροφορίες και λεπτομέρειες, όπως παρουσιάζονται στον κατάλογο είναι ενδεικτικές και σε καμία περίπτωση δεσμευτικές. Η Homelighting διατηρεί το δικαίωμα , ανά πάσα στιγμή και χωρίς προειδοποίηση, να τροποποιεί και να προσαρμόζει τα προϊόντα σύμφωνα με τα πρότυπα CE.
5. Οι εικόνες και η ατμόσφαιρα του προϊόντος μπορεί να αποκλίνουν από την πραγματικότητα και δεν συμφωνούν απαραίτητα με τη συνήθη εφαρμογή του προϊόντος.
6. Σε κάθε κωδικό που ξεκινάει με 77-XXXX-XXX, τα ψηφία μετά την δεύτερη παύλα είναι η τιμή καταλόγου, από αυτήν υπολογίζετε την έκπτωση σας.
Για παράδειγμα 77-8089-41, η τιμή καταλόγου είναι 41 ευρώ.
7. Τα γραμμικά προφίλ , οι αριθμοί που απεικονίζονται κάτω από τις στήλες , On/off, Dali και Triac είναι οι τιμές καταλόγου των προϊόντων.
Για παράδειγμα :

| MP61.70 CEILING BLACK | | | | | | | |
|-----------------------|-------------|---------------------------|------|-------|--------|-------|------|
| STANDART WATT | | | | | | | |
| Length (cm) | Code On/off | Description Code | Watt | Lumen | On/off | Triac | Dali |
| 59 | 77-9274-64 | MP61.70C-059-5-3-O-OFF-BL | 12,6 | 1880 | 64 | 70 | 96 |

Η τιμή καταλόγου για το προϊόν με μετασχηματιστή On/off είναι 64 ευρώ, με Dali μετασχηματιστή είναι 96 ευρώ και με Triac είναι 70 ευρώ. Ο κωδικός 77-9274-64, αντιστοιχεί στον On/off μετασχηματιστή.

MASTER LIGHTING

Νέα Περιφερειακή Οδός Βέροιας
Τ.Κ. 59 100, Βέροια
τηλ: 23310 62006
23310 71575
φαξ: 23310 23769

New Ring Road of Veria
P.C. 59 100,
Veria, Greece
tel: +30 23310 62006
+30 23310 71575
fax: +30 23310 23769

e-mail:
b2b@homelighting.gr
homelightingsales@gmail.com

www.homelighting.gr