

A dark, minimalist interior scene. A bright white light strip runs diagonally across the top of the frame, following the edge of the ceiling. Below it, a vertical light strip is embedded in the wall, extending downwards. The overall atmosphere is dramatic and modern, with high contrast between the dark surfaces and the bright light.

MASTERLIGHTING

MASTERLIGHTING

MASTERLIGHTING

Νέα Περιφερειακή Οδός Βέροιας
Τ.Κ. 59 100, Βέροια
Τηλ: 23310 62006
23310 71575
Fax: 23310 23769

New Ring Road of Veria
P.C. 59 100, Veria, Greece
Tel: +30 23310 62006
+30 23310 71575
Fax: +30 23310 23769

E-mail:
b2b@homelighting.gr
homelightingsales@gmail.com

www.homelighting.gr

CONTENTS

Visual Index | p. 6

Profiles | p. 8

Spotlights and Tracks | p. 38

Magnetic Flex Series | p. 58

Linear Slim Series | p. 66

Downlight Recessed
or Ceiling Spots | p. 72

Strips-Profiles-Silicon Tubes | p. 92




Wall Lights | p. 104

Symbols | p. 110

General Information | p. 111

VISUAL INDEX

Profiles

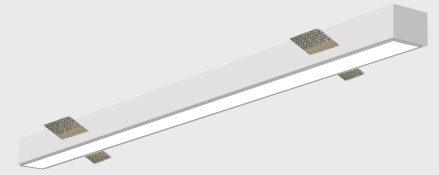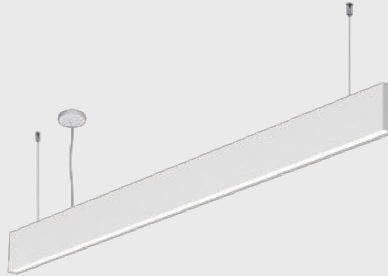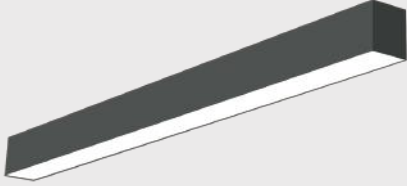

p | 8-37

Spotlights and Tracks



Zumo | 40-43



Gozo | 44-47



Barillo | 48-49




Paro-Mero | 50-51



Pelota - Dereto | 52-53



Trio Tracks | 54-55




Uno Tracks | 56-57

Magnetic Flex Series



p | 60-61

Magnetic Flex Lightings



p | 62-65

Linear Slim Series



p | 68-71

Downlight Recessed or Ceiling Spots



Bali | 74-75



Cargo | 76-77



Cielo | 78-81



Trixi | 82-85



Renno | 86




Mavi | 86



Joint | 87



Beem | 88-89

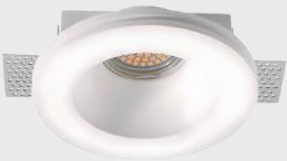

Yeso | 90-91

Strips-Profiles-Silicon Tubes




Led Strips | 94-98



Drivers | 99



Profile Aluminium | 100-101



Silicone Tubes | 102-103

Wall Lights





Cubo | 106-107



Cuadro | 108-109

MP Profile Linear

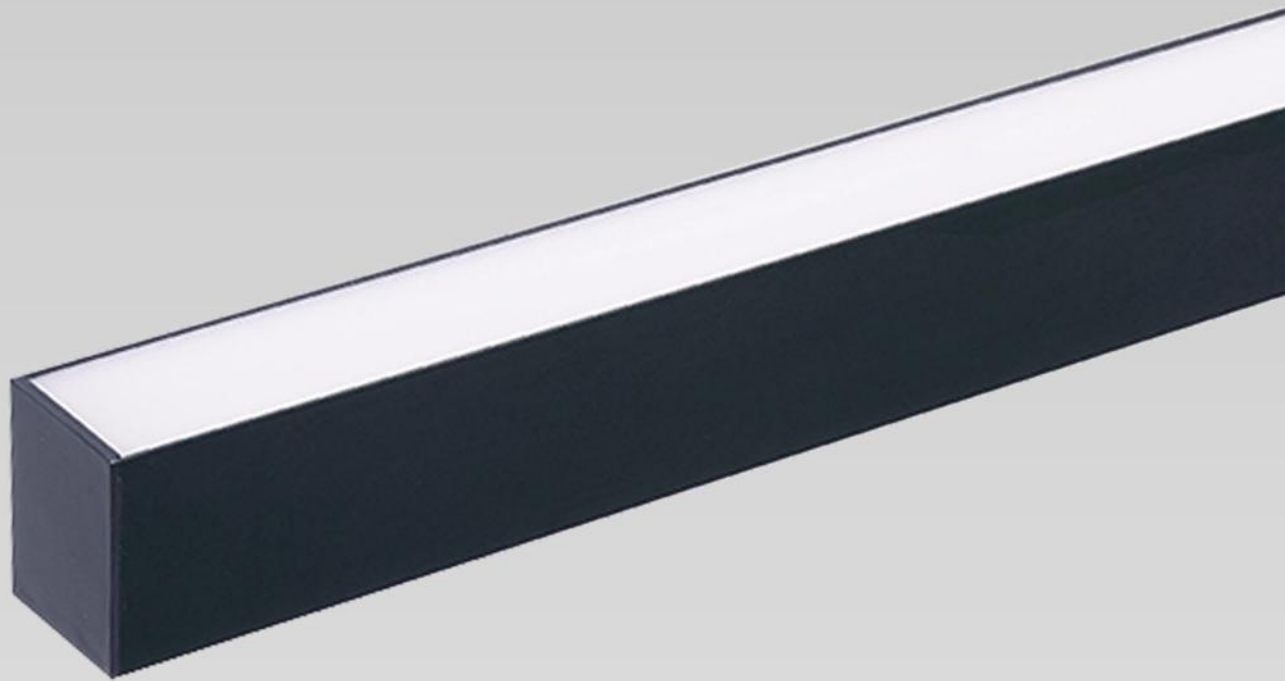


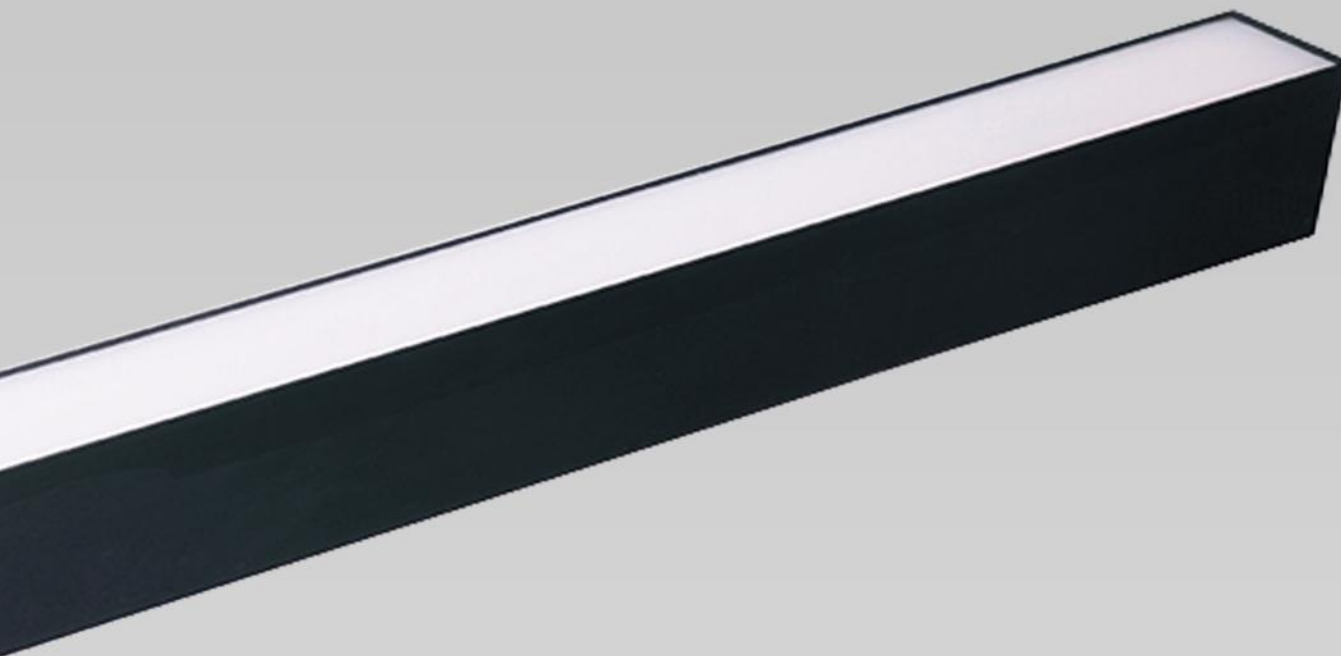


MP Masterlighting Profiles are a minimalistic profile design,
with the ability to fit any project.

They can be installed either ceiling, pendant, wall lamp,
recessed, trimless and up-down.

Profile - MP61.70

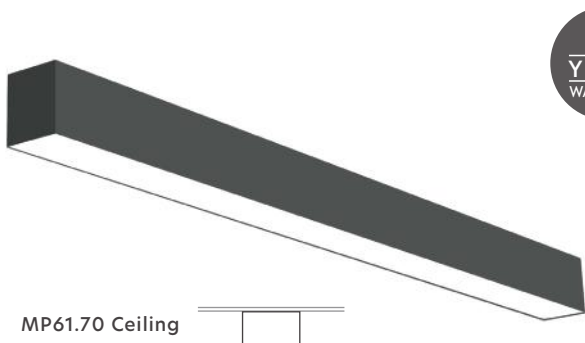

MP61.70 Ceiling

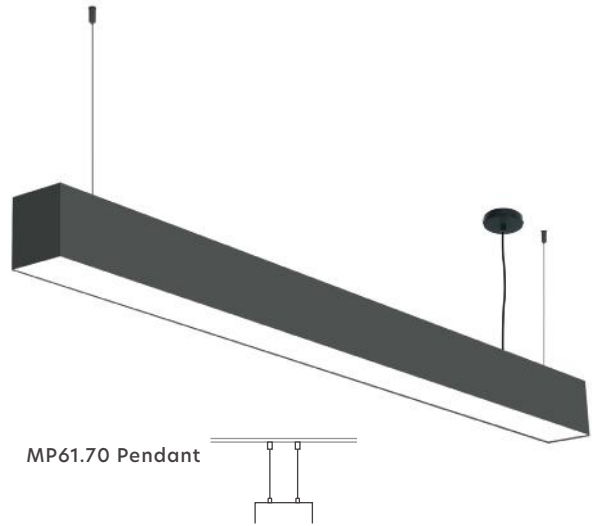

MP61.70 Pendant



MP61.70 Pendant or Ceiling

Is a led profile luminaire, body of aluminum, painted with electrostatic paint with a matte finish. Designed for ceiling or pendant mounting, providing direct light through an opal diffuser or honeycomb. Luminaire equipped with the best quality Samsung led chips 200Lm/W and KGP drivers.

MP61.70 Κρεμαστό ή Οροφής

Είναι φωτιστικό προφίλ led, σώμα από αλουμίνιο, βαμμένο με ηλεκτροστατική βαφή με ματ φινίρισμα. Σχεδιασμένο για τοποθέτηση σε οροφή ή κρεμαστό, παρέχοντας άμεσο φωτισμό μέσω της opal διάχυσης ή κηρήθρας. Φωτιστικό εξοπλισμένο με την καλύτερη ποιότητα. Προγράμματα οδήγησης Samsung led chips 200Lm/W και KGP.

Main Features

● Black ● White ● Grey ● Special Ral




Characteristics and Advantages

- Available from 59cm to 451cm
- Opal diffuser UGR<22 or Honeycomb UGR<15
- Beam Angle (Opal 120°, Honeycomb 30°)
- Three types of driver (ON-OFF, DALI, TRIAC with the ability TUYA)
- Coming in White, Black, Grey or optionally Special Ral
- Included 1,5m wire adjustable suspension. Request for 3m or 5m
- Low operating temperature due to excellent heat induction
- Excellent performance with low power consumption

Χαρακτηριστικά και Πλεονεκτήματα

- Διατίθεται από 59cm έως 451cm
- Διαχυτής Opal UGR<22 ή Κυψέλης UGR<15
- Γωνία δέσμης (Opal 120°, Κυψέλης 30°)
- Τρεις τύποι μετασχηματιστών (ON-OFF, DALI, TRIAC με δυνατότητα TUYA)
- Διατίθεται σε λευκό, μαύρο, γκρι ή προαιρετικά Special Ral
- Περιλαμβάνεται συρμάτινη ρυθμιζόμενη ανάρτηση 1,5m. Αίτημα για 3m ή 5m.
- Χαμηλή θερμοκρασία λειτουργίας λόγω εξαιρετικής επαγωγής θερμότητας
- Εξαιρετική απόδοση με χαμηλή κατανάλωση ενέργειας

All the hanging and ceiling metal safety accessories are included.

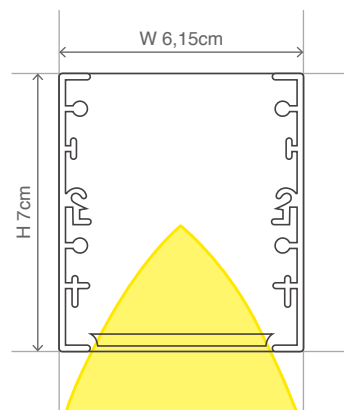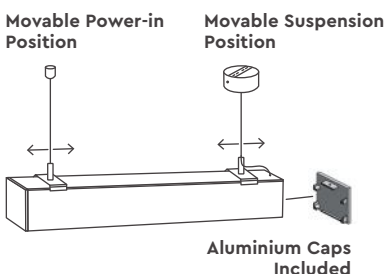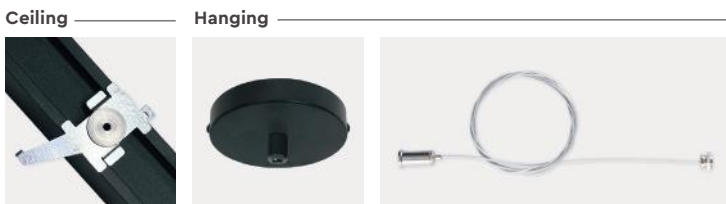

MASTER PROFILES							
Length cm	Standart Watt			Length cm	High Watt		
	Watt	Lumen 3.000K	Lumen 4.000K		Watt	Lumen 3.000K	Lumen 4.000K
59	12,6	1880	1900	59	21,6	3100	3120
87	18,9	2820	2850	87	32,4	4650	4680
115	25,2	3760	3800	115	43,2	6200	6240
143	31,5	4700	4750	143	54	7750	7800
171	37,8	5640	5700	171	64,8	9300	9360
199	44,1	6580	6650	199	75,6	10850	10920
227	50,4	7520	7600	227	86,4	12400	12480
255	56,7	8460	8550	255	97,2	13950	14040
283	63	9400	9500	283	108	15500	15600
311	69,3	10340	10450	311	118,8	17050	17160
339	75,6	11280	11400	339	129,6	18600	18720
367	81,9	12220	12350	367	140,4	20150	20280
395	88,2	13160	13300	395	151,2	21700	21840
423	94,5	14100	14250	423	162	23250	23400
451	100,8	15040	15200	451	172,8	24800	24960



Build your own code:

Your Code: MP61.70

Example Code:

MP61.70**P**-**059**-**S**-**3**-**O**-**OF**-**WH**

Structure	Length	Watt Power	Kelvin	Optic Diffuser	Driver	Body Color
P	059	S	3	O	OF	WH



Opal Diffuser

Choose Technical Configurations

Structure	Length	Watt Power	Kelvin	Optic Diffuser	Driver	Body Color
C = Ceiling P = Pendant	059 = 59 087 = 87 115 = 115 143 = 143 171 = 171 199 = 199 227 = 227 255 = 255 283 = 283 311 = 311 339 = 339 367 = 367 395 = 395 423 = 423 451 = 451	S = Standart H = High	3 = 3.000K 4 = 4.000K	O = Opal Diffuser MP = Honeycomb Diffuser	OF = ON-OFF D = Dali T = Triac	WH = White BL = Black GR = Grey SR = Special Ral





Honeycomb Diffuser



TU YA SWITCH
77-50498-40
Only with Triac Driver

*You can only choose from the choices above

MP61.70 Ceiling

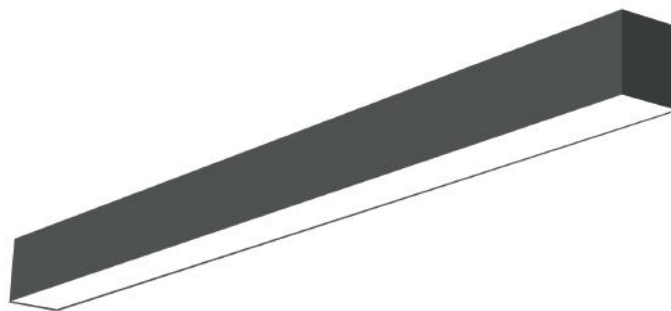

MP61.70 CEILING BLACK

STANDART WATT

Length (cm)	Code On/off	Description Code	Watt	Lumen	On/off	Triac	Dali
59	77-9274-64	MP61.70C-059-S-3-O-OFF-BL	12,6	1880	64	70	96
87	77-9370-80	MP61.70C-087-S-3-O-OFF-BL	18,9	2820	80	86	114
115	77-9466-92	MP61.70C-115-S-3-O-OFF-BL	25,2	3760	92	104	120
143	77-9562-106	MP61.70C-143-S-3-O-OFF-BL	31,5	4700	106	124	140
171	77-9658-122	MP61.70C-171-S-3-O-OFF-BL	37,8	5640	122	134	152
199	77-9754-136	MP61.70C-199-S-3-O-OFF-BL	44,1	6580	136	154	170
227	77-9850-150	MP61.70C-227-S-3-O-OFF-BL	50,4	7520	150	176	182
255	77-9946-164	MP61.70C-255-S-3-O-OFF-BL	56,7	8460	164	182	204
283	77-10042-170	MP61.70C-283-S-3-O-OFF-BL	63	9400	170	188	218
311	77-10138-194	MP61.70C-311-S-3-O-OFF-BL	69,3	10340	194	218	236
339	77-10234-214	MP61.70C-339-S-3-O-OFF-BL	75,6	11280	214	238	268
367	77-10330-228	MP61.70C-367-S-3-O-OFF-BL	81,9	12220	228	252	286
395	77-10426-248	MP61.70C-395-S-3-O-OFF-BL	88,2	13160	248	278	306
423	77-10522-262	MP61.70C-423-S-3-O-OFF-BL	94,5	14100	262	292	328
451	77-10618-280	MP61.70C-451-S-3-O-OFF-BL	100,8	15040	280	310	348

HIGH WATT

Length (cm)	Code On/off	Description Code	Watt	Lumen	On/off	Triac	Dali
59	77-9278-70	MP61.70C-059-H-3-O-OFF-BL	21,6	3100	70	76	96
87	77-9374-86	MP61.70C-087-H-3-O-OFF-BL	32,4	4650	86	98	114
115	77-9470-98	MP61.70C-115-H-3-O-OFF-BL	43,2	6200	98	110	124
143	77-9566-112	MP61.70C-143-H-3-O-OFF-BL	54	7750	112	130	146
171	77-9662-140	MP61.70C-171-H-3-O-OFF-BL	64,8	9300	140	158	164
199	77-9758-154	MP61.70C-199-H-3-O-OFF-BL	75,6	10850	154	172	178
227	77-9854-164	MP61.70C-227-H-3-O-OFF-BL	86,4	12400	164	182	188
255	77-9950-180	MP61.70C-255-H-3-O-OFF-BL	97,2	13950	180	198	234
283	77-10046-192	MP61.70C-283-H-3-O-OFF-BL	108	15500	192	222	254
311	77-10141-210	MP61.70C-311-H-3-O-OFF-BL	118,8	17050	210	246	272
339	77-10238-222	MP61.70C-339-H-3-O-OFF-BL	129,6	18600	222	258	290
367	77-10334-262	MP61.70C-367-H-3-O-OFF-BL	140,4	20150	262	304	324
395	77-10430-276	MP61.70C-395-H-3-O-OFF-BL	151,2	21700	276	324	360
423	77-10526-290	MP61.70C-423-H-3-O-OFF-BL	162	23250	290	338	404
451	77-10622-310	MP61.70C-451-H-3-O-OFF-BL	172,8	24800	310	364	430

Ability to select Kelvin, changing the **3** (3000K) to **4** (4000K), if you wish your lighting to be 4000k than 3000k.
 Ability to select between Opal or Honeycomb, changing the **O** (OPAL) to **MP** (HONEYCOMB), according to your desire.
 Ability to select Driver Triac or Dali, changing the **OF** (ON/OFF) to **T** (TRIAC) or **D** (DALI), according to your desire of Driver.
 Ability to select Color, changing the **BL** (BLACK) to **WH** (WHITE), **GR** (GREY) or **SR** (SPECIAL RAL), according to your desire.

Price Catalogue Explanation


For Honeycomb from length 059-115 extra 6€ to the price catalogue, from 143-227 extra 12€, from 255-339 extra 18€ and from 367-451 extra 24€. For Drivers the prices are on the list. For Special Ral extra 10% to the price catalogue.

To build your personal code you can visit our site www.masterlighting.gr or you can go to the previous page....

The price catalogue as well as the code 77-XXXXX-XXX varies according to your options.

Included all the ceiling accessories.

MP61.70 Pendant



MP61.70 PENDANT WHITE

STANDART WATT

Length (cm)	Code On/off	Description Code	Watt	Lumen	On/off	Triac	Dali
59	77-16853-68	MP61.70P-059-S-3-O-OFF-WH	12,6	1880	68	74	100
87	77-16949-84	MP61.70P-087-S-3-O-OFF-WH	18,9	2820	84	90	118
115	77-17045-96	MP61.70P-115-S-3-O-OFF-WH	25,2	3760	96	108	124
143	77-17141-110	MP61.70P-143-S-3-O-OFF-WH	31,5	4700	110	122	138
171	77-17237-126	MP61.70P-171-S-3-O-OFF-WH	37,8	5640	126	138	156
199	77-17333-140	MP61.70P-199-S-3-O-OFF-WH	44,1	6580	140	158	174
227	77-17429-154	MP61.70P-227-S-3-O-OFF-WH	50,4	7520	154	172	186
255	77-17526-168	MP61.70P-255-S-3-O-OFF-WH	56,7	8460	168	186	208
283	77-17622-172	MP61.70P-283-S-3-O-OFF-WH	63	9400	172	190	222
311	77-17718-198	MP61.70P-311-S-3-O-OFF-WH	69,3	10340	198	222	240
339	77-17814-218	MP61.70P-339-S-3-O-OFF-WH	75,6	11280	218	242	272
367	77-17910-232	MP61.70P-367-S-3-O-OFF-WH	81,9	12220	232	256	290
395	77-18006-252	MP61.70P-395-S-3-O-OFF-WH	88,2	13160	252	282	310
423	77-18102-266	MP61.70P-423-S-3-O-OFF-WH	94,5	14100	266	312	332
451	77-18198-284	MP61.70P-451-S-3-O-OFF-WH	100,8	15040	284	314	352

HIGH WATT

Length (cm)	Code On/off	Description Code	Watt	Lumen	On/off	Triac	Dali
59	77-16857-74	MP61.70P-059-H-3-O-OFF-WH	12,6	3100	74	80	100
87	77-16953-90	MP61.70P-087-H-3-O-OFF-WH	18,9	4650	90	102	118
115	77-17049-102	MP61.70P-115-H-3-O-OFF-WH	25,2	6200	102	114	128
143	77-17145-116	MP61.70P-143-H-3-O-OFF-WH	31,5	7750	116	134	144
171	77-17241-144	MP61.70P-171-H-3-O-OFF-WH	37,8	9300	144	162	168
199	77-17337-158	MP61.70P-199-H-3-O-OFF-WH	44,1	10850	158	182	182
227	77-17433-168	MP61.70P-227-H-3-O-OFF-WH	50,4	12400	168	192	192
255	77-17530-184	MP61.70P-255-H-3-O-OFF-WH	56,7	13950	184	214	238
283	77-17626-196	MP61.70P-283-H-3-O-OFF-WH	63	15500	196	226	258
311	77-17722-214	MP61.70P-311-H-3-O-OFF-WH	69,3	17050	214	250	276
339	77-17818-226	MP61.70P-339-H-3-O-OFF-WH	75,6	18600	226	262	294
367	77-17914-266	MP61.70P-367-H-3-O-OFF-WH	81,9	20150	266	308	330
395	77-18010-280	MP61.70P-395-H-3-O-OFF-WH	88,2	21700	280	328	360
423	77-18106-294	MP61.70P-423-H-3-O-OFF-WH	94,5	23250	294	342	380
451	77-18202-314	MP61.70P-451-H-3-O-OFF-WH	100,8	24800	314	368	410

Δυνατότητα επιλογής Kelvin, αλλάζοντας το **3** (3000K) σε **4** (4000K), εάν επιθυμείτε ο φωτισμός σας να είναι 4000K αντί για 3000K.
 Δυνατότητα επιλογής μεταξύ Opal ή Κυψέλης, αλλάζοντας το **O** (OPAL) σε **MP** (HONEYCOMB), σύμφωνα με την επιθυμία σας.
 Δυνατότητα επιλογής μετασχηματιστή Triac ή Dali, αλλάζοντας το **OF** (ON/OFF) σε **T** (TRIAC) ή **D** (DALI), σύμφωνα με την επιλογή σας.
 Δυνατότητα επιλογής χρώματος, αλλάζοντας το **BL** (Μαύρο) σε **WH** (Άσπρο), **GR** (Γκρι) ή **SR** (Special Ral).


Επεξήγηση Τιμοκαταλόγων

Για Κυψέλη από μήκος 059-115 επιπλέον 6€ στην τιμή καταλόγου, από μήκος 143-227 επιπλέον 12€, από μήκος 255-339 επιπλέον 18€ και από μήκος 367-451 επιπλέον 24€ στην τιμή καταλόγου. Για τους μετασχηματιστές οι τιμές βρίσκονται στη λίστα παραπάνω. Για Special Ral επιπλέον 10% στην τιμή καταλόγου.


Για να δημιουργήσετε τον προσωπικό σας κωδικό μπορείτε να επισκεφτείτε το site μας www.masterlighting.gr ή μπορείτε να πάτε στην προηγούμενη σελίδα...

Η τιμή καταλόγου καθώς και ο κωδικός 77-XXXX-XXX διαφέρει ανάλογα με τις επιλογές σας. Περιλαμβάνονται όλα τα εξαρτήματα ανάρτησης.

Profile - MP61.56

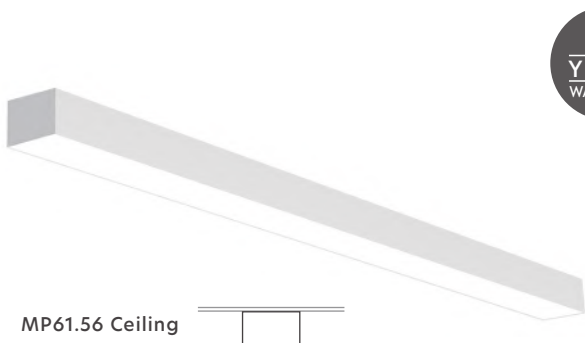

MP61.56 Ceiling

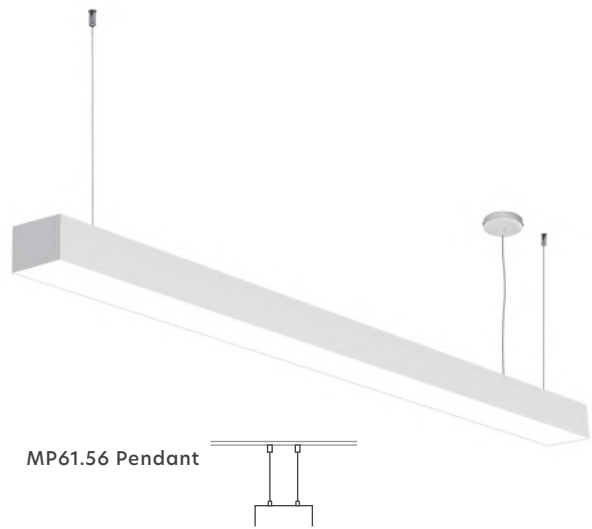

MP61.56 Pendant



MP61.56 Pendant or Ceiling

Is a led profile luminaire, body of aluminum, painted with electrostatic paint with a matte finish. Designed for ceiling or pendant mounting, providing direct light through an opal diffuser or honeycomb. Luminaire equipped with the best quality Samsung led chips 200Lm/W and KGP drivers.

MP61.56 Κρεμαστό ή Οροφής

Είναι φωτιστικό προφίλ led, σώμα από αλουμίνιο, βαμμένο με ηλεκτροστατική βαφή με ματ φινιρίσμα. Σχεδιασμένο για τοποθέτηση σε οροφή ή κρεμαστό, παρέχοντας άμεσο φωτισμό μέσω της opal διάχυσης ή κηρήθρας. Φωτιστικό εξοπλισμένο με την καλύτερη ποιότητα. Προγράμματα οδήγησης Samsung led chips 200Lm/W και KGP.

Main Features

● Black ● White ● Grey ● Special Ral



Characteristics and Advantages

- Available from 59cm to 451cm
- Opal diffuser UGR<22 or Honeycomb UGR<15
- Beam Angle (Opal 120°, Honeycomb 30°)
- Three types of driver (ON-OFF, DALI, TRIAC with the ability TUYA)
- Coming in White, Black, Grey or optionally Special Ral
- Included 1,5m wire adjustable suspension. Request for 3m or 5m
- Low operating temperature due to excellent heat induction
- Excellent performance with low power consumption

Χαρακτηριστικά και Πλεονεκτήματα

- Διατίθεται από 59cm έως 451cm
- Διαχυτής Opal UGR<22 ή Κυψέλης UGR<15
- Γωνία δέσμης (Opal 120°, Κυψέλης 30°)
- Τρεις τύποι μετασχηματιστών (ON-OFF, DALI, TRIAC με δυνατότητα TUYA)
- Διατίθεται σε λευκό, μαύρο, γκρι ή προαιρετικά Special Ral
- Περιλαμβάνεται συρμάτινη ρυθμιζόμενη ανάρτηση 1,5m. Αίτημα για 3m ή 5m.
- Χαμηλή θερμοκρασία λειτουργίας λόγω εξαιρετικής επαγωγής θερμότητας
- Εξαιρετική απόδοση με χαμηλή κατανάλωση ενέργειας

All the hanging and ceiling metal safety accessories are included.

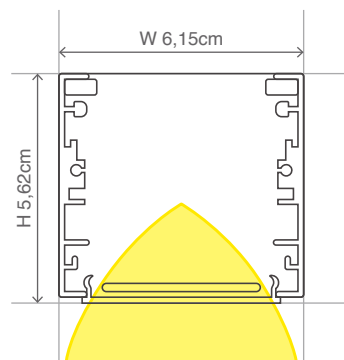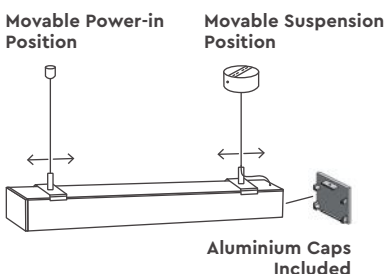

MASTER PROFILES							
Length cm	Standart Watt			Length cm	High Watt		
	Watt	Lumen 3.000K	Lumen 4.000K		Watt	Lumen 3.000K	Lumen 4.000K
59	12,6	1880	1900	59	21,6	3100	3120
87	18,9	2820	2850	87	32,4	4650	4680
115	25,2	3760	3800	115	43,2	6200	6240
143	31,5	4700	4750	143	54	7750	7800
171	37,8	5640	5700	171	64,8	9300	9360
199	44,1	6580	6650	199	75,6	10850	10920
227	50,4	7520	7600	227	86,4	12400	12480
255	56,7	8460	8550	255	97,2	13950	14040
283	63	9400	9500	283	108	15500	15600
311	69,3	10340	10450	311	118,8	17050	17160
339	75,6	11280	11400	339	129,6	18600	18720
367	81,9	12220	12350	367	140,4	20150	20280
395	88,2	13160	13300	395	151,2	21700	21840
423	94,5	14100	14250	423	162	23250	23400
451	100,8	15040	15200	451	172,8	24800	24960




Build your own code:

Your Code: MP61.56

Example Code:

MP61.56P-143-H-4-O-T-WH

Structure	Length	Watt Power	Kelvin	Optic Diffuser	Driver	Body Color
P	143	H	4	O	T	WH
Structure	Length	Watt Power	Kelvin	Optic Diffuser	Driver	Body Color



Opal Diffuser

Choose Technical Configurations

Structure	Length	Watt Power	Kelvin	Optic Diffuser	Driver	Body Color
C = Ceiling P = Pendant	059 = 59 087 = 87 115 = 115 143 = 143 171 = 171 199 = 199 227 = 227 255 = 255 283 = 283 311 = 311 339 = 339 367 = 367 395 = 395 423 = 423 451 = 451	S = Standart H = High	3 = 3.000K 4 = 4.000K	O = Opal Diffuser MP = Honeycomb Diffuser	OF = ON-OFF D = Dali T = Triac	WH = White BL = Black GR = Grey SR = Special Ral





Honeycomb Diffuser



TUYA SWITCH
77-50498-40
Only with Triac Driver

*You can only choose from the choices above

MP61.56 Ceiling

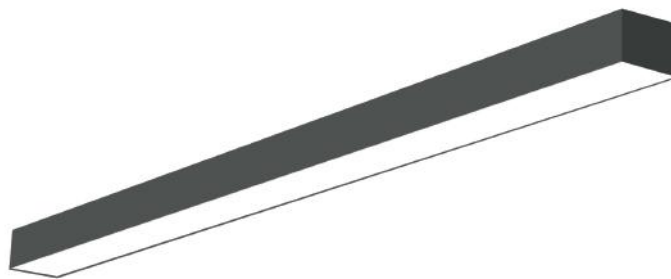

MP61.56 CEILING BLACK

STANDART WATT

Length (cm)	Code On/off	Description Code	Watt	Lumen	On/off	Triac	Dali
59	77-10714-60	MP61.56C-059-S-3-O-OFF-BL	12,6	1880	60	66	90
87	77-10810-70	MP61.56C-087-S-3-O-OFF-BL	18,9	2820	70	76	102
115	77-10906-82	MP61.56C-115-S-3-O-OFF-BL	25,2	3760	82	94	108
143	77-11002-92	MP61.56C-143-S-3-O-OFF-BL	31,5	4700	92	104	120
171	77-11098-108	MP61.56C-171-S-3-O-OFF-BL	37,8	5640	108	114	136
199	77-11194-118	MP61.56C-199-S-3-O-OFF-BL	44,1	6580	118	136	150
227	77-11290-132	MP61.56C-227-S-3-O-OFF-BL	50,4	7520	132	150	162
255	77-11386-140	MP61.56C-255-S-3-O-OFF-BL	56,7	8460	140	158	178
283	77-11482-150	MP61.56C-283-S-3-O-OFF-BL	63	9400	150	168	188
311	77-11578-164	MP61.56C-311-S-3-O-OFF-BL	69,3	10340	164	188	204
339	77-11674-180	MP61.56C-339-S-3-O-OFF-BL	75,6	11280	180	204	234
367	77-11770-190	MP61.56C-367-S-3-O-OFF-BL	81,9	12220	190	214	246
395	77-11866-202	MP61.56C-395-S-3-O-OFF-BL	88,2	13160	202	232	258
423	77-11962-208	MP61.56C-423-S-3-O-OFF-BL	94,5	14100	208	238	274
451	77-12058-224	MP61.56C-451-S-3-O-OFF-BL	100,8	15040	224	254	284

HIGH WATT

Length (cm)	Code On/off	Description Code	Watt	Lumen	On/off	Triac	Dali
59	77-10718-64	MP61.56C-059-H-3-O-OFF-BL	21,6	3100	64	70	90
87	77-10814-78	MP61.56C-087-H-3-O-OFF-BL	32,4	4650	78	90	102
115	77-10910-98	MP61.56C-115-H-3-O-OFF-BL	43,2	6200	98	110	114
143	77-11006-104	MP61.56C-143-H-3-O-OFF-BL	54	7750	104	122	124
171	77-11102-124	MP61.56C-171-H-3-O-OFF-BL	64,8	9300	124	142	150
199	77-11198-136	MP61.56C-199-H-3-O-OFF-BL	75,6	10850	136	160	160
227	77-11294-146	MP61.56C-227-H-3-O-OFF-BL	86,4	12400	146	170	170
255	77-11390-156	MP61.56C-255-H-3-O-OFF-BL	97,2	13950	156	186	208
283	77-11486-166	MP61.56C-283-H-3-O-OFF-BL	108	15500	166	196	226
311	77-11582-182	MP61.56C-311-H-3-O-OFF-BL	118,8	17050	182	218	244
339	77-11678-194	MP61.56C-339-H-3-O-OFF-BL	129,6	18600	194	230	260
367	77-11774-228	MP61.56C-367-H-3-O-OFF-BL	140,4	20150	228	270	274
395	77-11870-242	MP61.56C-395-H-3-O-OFF-BL	151,2	21700	242	290	284
423	77-11966-252	MP61.56C-423-H-3-O-OFF-BL	162	23250	252	300	298
451	77-12062-262	MP61.56C-451-H-3-O-OFF-BL	172,8	24800	262	316	308

Ability to select Kelvin, changing the **3** (3000K) to **4** (4000K), if you wish your lighting to be 4000k than 3000k.
 Ability to select between Opal or Honeycomb, changing the **O** (OPAL) to **MP** (HONEYCOMB), according to your desire.
 Ability to select Driver Triac or Dali, changing the **OF** (ON/OFF) to **T** (TRIAC) or **D** (DALI), according to your desire of Driver.
 Ability to select Color, changing the **BL** (BLACK) to **WH** (WHITE), **GR** (GREY) or **SR** (SPECIAL RAL), according to your desire.

Price Catalogue Explanation


For Honeycomb from length 059-115 extra 6€ to the price catalogue, from 143-227 extra 12€, from 255-339 extra 18€ and from 367-451 extra 24€. For Drivers the prices are on the list. For Special Ral extra 10% to the price catalogue.

To build your personal code you can visit our site www.masterlighting.gr or you can go to the previous page....

The price catalogue as well as the code 77-XXXXX-XXX varies according to your options.

Included all the ceiling accessories.

MP61.56 Pendant



MP61.56 PENDANT WHITE

STANDART WATT

Length (cm)	Code On/off	Description Code	Watt	Lumen	On/off	Triac	Dali
59	77-18294-64	MP61.56P-059-S-3-O-OFF-WH	12,6	1900	64	70	94
87	77-18390-74	MP61.56P-087-S-3-O-OFF-WH	18,9	2820	74	80	106
115	77-18486-86	MP61.56P-115-S-3-O-OFF-WH	25,2	3800	86	98	112
143	77-18582-96	MP61.56P-143-S-3-O-OFF-WH	31,5	4700	96	108	124
171	77-18678-112	MP61.56P-171-S-3-O-OFF-WH	37,8	5640	112	124	140
199	77-18774-122	MP61.56P-199-S-3-O-OFF-WH	44,1	6580	122	140	152
227	77-18870-136	MP61.56P-227-S-3-O-OFF-WH	50,4	7520	136	154	166
255	77-18966-144	MP61.56P-255-S-3-O-OFF-WH	56,7	8460	144	162	182
283	77-19062-154	MP61.56P-283-S-3-O-OFF-WH	63	9400	154	172	192
311	77-19158-168	MP61.56P-311-S-3-O-OFF-WH	69,3	10340	168	192	208
339	77-19254-184	MP61.56P-339-S-3-O-OFF-WH	75,6	11280	184	208	234
367	77-19350-190	MP61.56P-367-S-3-O-OFF-WH	81,9	12220	194	218	250
395	77-19446-206	MP61.56P-395-S-3-O-OFF-WH	88,2	13300	206	236	262
423	77-19542-216	MP61.56P-423-S-3-O-OFF-WH	94,5	14100	216	246	278
451	77-19638-228	MP61.56P-451-S-3-O-OFF-WH	100,8	15040	228	258	288

HIGH WATT

Length (cm)	Code On/off	Description Code	Watt	Lumen	On/off	Triac	Dali
59	77-18298-68	MP61.56P-059-H-3-O-OFF-WH	21,6	3100	68	74	94
87	77-18390-74	MP61.56P-087-H-3-O-OFF-WH	32,4	4650	74	86	106
115	77-18490-102	MP61.56P-115-H-3-O-OFF-WH	43,2	6200	102	114	118
143	77-18586-110	MP61.56P-143-H-3-O-OFF-WH	54	7750	110	128	128
171	77-18682-128	MP61.56P-171-H-3-O-OFF-WH	64,8	9300	128	146	152
199	77-18778-140	MP61.56P-199-H-3-O-OFF-WH	75,6	10850	140	164	160
227	77-18874-150	MP61.56P-227-H-3-O-OFF-WH	86,4	12400	150	174	174
255	77-18970-160	MP61.56P-255-H-3-O-OFF-WH	97,2	13950	160	190	212
283	77-19066-170	MP61.56P-283-H-3-O-OFF-WH	108	15500	170	200	230
311	77-19162-186	MP61.56P-311-H-3-O-OFF-WH	118,8	17050	186	222	248
339	77-19258-198	MP61.56P-339-H-3-O-OFF-WH	129,6	18600	198	234	264
367	77-19354-232	MP61.56P-367-H-3-O-OFF-WH	140,4	20150	232	274	278
395	77-19450-246	MP61.56P-395-H-3-O-OFF-WH	151,2	21700	246	294	292
423	77-19546-256	MP61.56P-423-H-3-O-OFF-WH	162	23250	256	304	302
451	77-19642-266	MP61.56P-451-H-3-O-OFF-WH	172,8	24800	266	320	312

Δυνατότητα επιλογής Kelvin, αλλάζοντας το **3** (3000K) σε **4** (4000K), εάν επιθυμείτε ο φωτισμός σας να είναι 4000K αντί για 3000K.
 Δυνατότητα επιλογής μεταξύ Opal ή Κυψέλης, αλλάζοντας το **O** (OPAL) σε **MP** (HONEYCOMB), σύμφωνα με την επιθυμία σας.
 Δυνατότητα επιλογής μετασχηματιστή Triac ή Dali, αλλάζοντας το **OF** (ON/OFF) σε **T** (TRIAC) ή **D** (DALI), σύμφωνα με την επιλογή σας.
 Δυνατότητα επιλογής χρώματος, αλλάζοντας το **BL** (Μαύρο) σε **WH** (Άσπρο), **GR** (Γκρι) ή **SR** (Special Ral).



Επεξήγηση Τιμοκαταλόγων

Για Κυψέλη από μήκος 059-115 επιπλέον 6€ στην τιμή καταλόγου, από μήκος 143-227 επιπλέον 12€, από μήκος 255-339 επιπλέον 18€ και από μήκος 367-451 επιπλέον 24€ στην τιμή καταλόγου. Για τους μετασχηματιστές οι τιμές βρίσκονται στη λίστα παραπάνω. Για Special Ral επιπλέον 10% στην τιμή καταλόγου.

Για να δημιουργήσετε τον προσωπικό σας κωδικό μπορείτε να επισκεφτείτε το site μας www.masterlighting.gr ή μπορείτε να πάτε στην προηγούμενη σελίδα...

Η τιμή καταλόγου καθώς και ο κωδικός 77-XXXX-XXX διαφέρει ανάλογα με τις επιλογές σας. Περιλαμβάνονται όλα τα εξαρτήματα ανάρτησης.

Profile - MP44.70

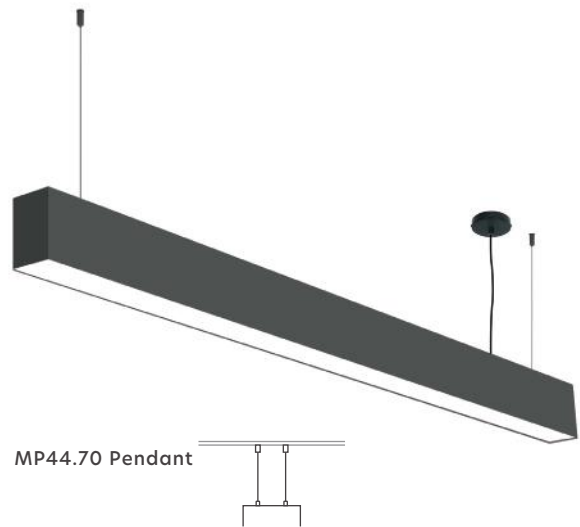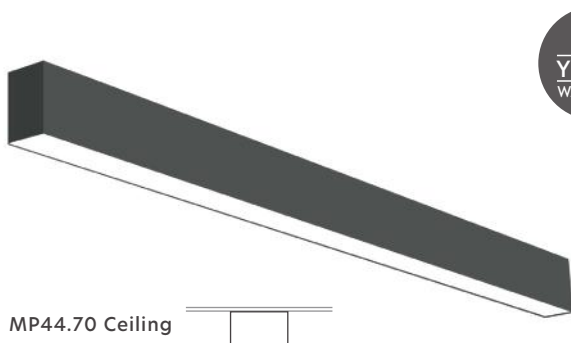

MP44.70 Pendant or Ceiling

Is a led profile luminaire, body of aluminum, painted with electrostatic paint with a matte finish. Designed for ceiling or pendant mounting, providing direct light through an opal diffuser or honeycomb. Luminaire equipped with the best quality Samsung led chips 200Lm/W and KGP drivers.




MP44.70 Κρεμαστό ή Οροφής

Είναι φωτιστικό προφίλ led, σώμα από αλουμίνιο, βαμμένο με ηλεκτροστατική βαφή με ματ φινίρισμα. Σχεδιασμένο για τοποθέτηση σε οροφή ή κρεμαστό, παρέχοντας άμεσο φωτισμό μέσω της opal διάχυσης ή κηρήθρας. Φωτιστικό εξοπλισμένο με την καλύτερη ποιότητα. Προγράμματα οδήγησης Samsung led chips 200Lm/W και KGP.

Main Features

● Black ● White ● Grey ● Special Ral

All the hanging and ceiling metal safety accessories are included.

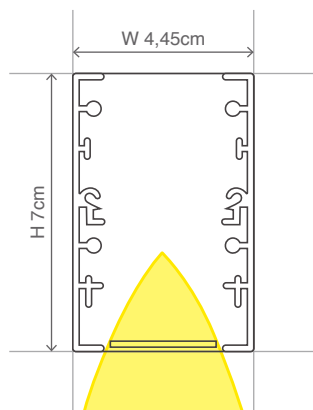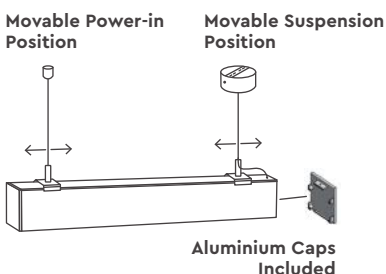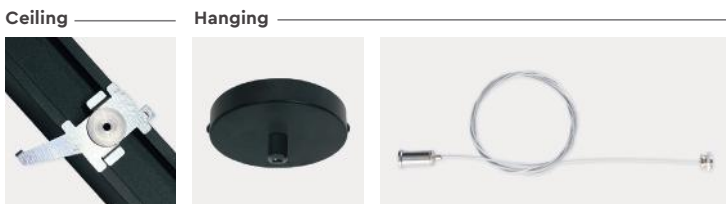

Characteristics and Advantages

- Available from 59cm to 451cm
- Opal diffuser UGR<22 or Honeycomb UGR<15
- Beam Angle (Opal 120°, Honeycomb 30°)
- Three types of driver (ON-OFF, DALI, TRIAC with the ability TUYA)
- Coming in White, Black, Grey or optionally Special Ral
- Included 1,5m wire adjustable suspension. Request for 3m or 5m
- Low operating temperature due to excellent heat induction
- Excellent performance with low power consumption

Χαρακτηριστικά και Πλεονεκτήματα

- Διατίθεται από 59cm έως 451cm
- Διαχυτής Opal UGR<22 ή Κυψέλης UGR<15
- Γωνία δέσμης (Opal 120°, Κυψέλης 30°)
- Τρεις τύποι μετασχηματιστών (ON-OFF, DALI, TRIAC με δυνατότητα TUYA)
- Διατίθεται σε λευκό, μαύρο, γκρι ή προαιρετικά Special Ral
- Περιλαμβάνεται συρμάτινη ρυθμιζόμενη ανάρτηση 1,5m. Αίτημα για 3m ή 5m.
- Χαμηλή θερμοκρασία λειτουργίας λόγω εξαιρετικής επαγωγής θερμότητας
- Εξαιρετική απόδοση με χαμηλή κατανάλωση ενέργειας

MASTER PROFILES							
Length cm	Standart Watt			Length cm	High Watt		
	Watt	Lumen 3.000K	Lumen 4.000K		Watt	Lumen 3.000K	Lumen 4.000K
59	12,6	1880	1900	59	21,6	3100	3120
87	18,9	2820	2850	87	32,4	4650	4680
115	25,2	3760	3800	115	43,2	6200	6240
143	31,5	4700	4750	143	54	7750	7800
171	37,8	5640	5700	171	64,8	9300	9360
199	44,1	6580	6650	199	75,6	10850	10920
227	50,4	7520	7600	227	86,4	12400	12480
255	56,7	8460	8550	255	97,2	13950	14040
283	63	9400	9500	283	108	15500	15600
311	69,3	10340	10450	311	118,8	17050	17160
339	75,6	11280	11400	339	129,6	18600	18720
367	81,9	12220	12350	367	140,4	20150	20280
395	88,2	13160	13300	395	151,2	21700	21840
423	94,5	14100	14250	423	162	23250	23400
451	100,8	15040	15200	451	172,8	24800	24960



Build your own code:

Your Code: MP44.70

Example Code:

MP44.70C-115-S-3-O-T-BL

Structure	Length	Watt Power	Kelvin	Optic Diffuser	Driver	Body Color
C	115	S	3	O	T	BL
Structure	Length	Watt Power	Kelvin	Optic Diffuser	Driver	Body Color



Opal Diffuser

Choose Technical Configurations

Structure	Length	Watt Power	Kelvin	Optic Diffuser	Driver	Body Color
C = Ceiling P = Pendant	059 = 59 087 = 87 115 = 115 143 = 143 171 = 171 199 = 199 227 = 227 255 = 255 283 = 283 311 = 311 339 = 339 367 = 367 395 = 395 423 = 423 451 = 451	S = Standart H = High	3 = 3.000K 4 = 4.000K	O = Opal Diffuser MP = Honeycomb Diffuser	OF = ON-OFF D = Dali T = Triac	WH = White BL = Black GR = Grey SR = Special Ral





Honeycomb Diffuser



TUYA SWITCH
77-50498-40
Only with Triac Driver

*You can only choose from the choices above

MP44.70 Ceiling

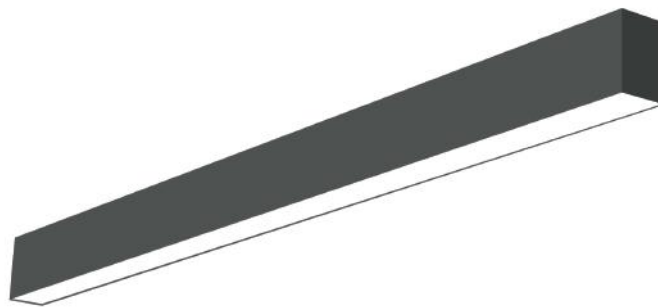

MP44.70 CEILING BLACK

STANDART WATT

Length (cm)	Code On/off	Description Code	Watt	Lumen	On/off	Triac	Dali
59	77-12154-62	MP44.70C-059-S-3-O-OFF-BL	12,6	1880	62	68	94
87	77-12250-78	MP44.70C-087-S-3-O-OFF-BL	18,9	2820	78	84	112
115	77-12346-90	MP44.70C-115-S-3-O-OFF-BL	25,2	3760	90	102	118
143	77-12442-104	MP44.70C-143-S-3-O-OFF-BL	31,5	4700	104	122	138
171	77-12538-120	MP44.70C-171-S-3-O-OFF-BL	37,8	5640	120	132	150
199	77-12634-134	MP44.70C-199-S-3-O-OFF-BL	44,1	6580	134	152	168
227	77-12730-148	MP44.70C-227-S-3-O-OFF-BL	50,4	7520	148	174	180
255	77-12826-162	MP44.70C-255-S-3-O-OFF-BL	56,7	8460	162	180	202
283	77-12922-168	MP44.70C-283-S-3-O-OFF-BL	63	9400	168	186	216
311	77-13018-192	MP44.70C-311-S-3-O-OFF-BL	69,3	10340	192	216	234
339	77-13114-212	MP44.70C-339-S-3-O-OFF-BL	75,6	11280	212	236	266
367	77-13210-226	MP44.70C-367-S-3-O-OFF-BL	81,9	12220	226	250	284
395	77-13306-246	MP44.70C-395-S-3-O-OFF-BL	88,2	13160	246	276	304
423	77-13402-260	MP44.70C-423-S-3-O-OFF-BL	94,5	14100	260	290	324
451	77-13498-278	MP44.70C-451-S-3-O-OFF-BL	100,8	15040	278	308	346

HIGH WATT

Length (cm)	Code On/off	Description Code	Watt	Lumen	On/off	Triac	Dali
59	77-12158-68	MP44.70C-059-H-3-O-OFF-BL	21,6	3100	68	74	94
87	77-12254-84	MP44.70C-087-H-3-O-OFF-BL	32,4	4650	84	96	112
115	77-12350-96	MP44.70C-115-H-3-O-OFF-BL	43,2	6200	96	108	122
143	77-12442-110	MP44.70C-143-H-3-O-OFF-BL	54	7750	110	128	144
171	77-12542-138	MP44.70C-171-H-3-O-OFF-BL	64,8	9300	138	156	162
199	77-12638-152	MP44.70C-199-H-3-O-OFF-BL	75,6	10850	152	170	176
227	77-12734-162	MP44.70C-227-H-3-O-OFF-BL	86,4	12400	162	180	186
255	77-12830-178	MP44.70C-255-H-3-O-OFF-BL	97,2	13950	178	196	232
283	77-12926-190	MP44.70C-283-H-3-O-OFF-BL	108	15500	190	220	252
311	77-13022-208	MP44.70C-311-H-3-O-OFF-BL	118,8	17050	208	244	270
339	77-13118-220	MP44.70C-339-H-3-O-OFF-BL	129,6	18600	220	256	288
367	77-13214-260	MP44.70C-367-H-3-O-OFF-BL	140,4	20150	260	302	322
395	77-13310-274	MP44.70C-395-H-3-O-OFF-BL	151,2	21700	274	322	358
423	77-13406-288	MP44.70C-423-H-3-O-OFF-BL	162	23250	288	336	402
451	77-13502-308	MP44.70C-451-H-3-O-OFF-BL	172,8	24800	308	362	428

Ability to select Kelvin, changing the **3** (3000K) to **4** (4000K), if you wish your lighting to be 4000k than 3000k.
 Ability to select between Opal or Honeycomb, changing the **O** (OPAL) to **MP** (HONEYCOMB), according to your desire.
 Ability to select Driver Triac or Dali, changing the **OF** (ON/OFF) to **T** (TRIAC) or **D** (DALI), according to your desire of Driver.
 Ability to select Color, changing the **BL** (BLACK) to **WH** (WHITE), **GR** (GREY) or **SR** (SPECIAL RAL), according to your desire.

Price Catalogue Explanation


For Honeycomb from length 059-115 extra 6€ to the price catalogue, from 143-227 extra 12€, from 255-339 extra 18€ and from 367-451 extra 24€. For Drivers the prices are on the list. For Special Ral extra 10% to the price catalogue.

To build your personal code you can visit our site www.masterlighting.gr or you can go to the previous page....

The price catalogue as well as the code 77-XXXXX-XXX varies according to your options.

Included all the ceiling accessories.

MP44.70 Pendant



MP44.70 PENDANT WHITE

STANDART WATT

Length (cm)	Code On/off	Description Code	Watt	Lumen	On/off	Triac	Dali
59	77-19734-66	MP44.70P-059-S-3-O-OFF-WH	12,6	1900	66	72	98
87	77-19830-82	MP44.70P-087-S-3-O-OFF-WH	18,9	2820	82	88	116
115	77-19926-94	MP44.70P-115-S-3-O-OFF-WH	25,2	3800	94	106	122
143	77-20022-108	MP44.70P-143-S-3-O-OFF-WH	31,5	4700	108	120	136
171	77-20118-124	MP44.70P-171-S-3-O-OFF-WH	37,8	5640	124	136	154
199	77-20214-138	MP44.70P-199-S-3-O-OFF-WH	44,1	6580	138	156	172
227	77-20310-152	MP44.70P-227-S-3-O-OFF-WH	50,4	7520	152	170	184
255	77-20406-166	MP44.70P-255-S-3-O-OFF-WH	56,7	8460	166	184	206
283	77-20502-170	MP44.70P-283-S-3-O-OFF-WH	63	9400	170	188	220
311	77-20598-196	MP44.70P-311-S-3-O-OFF-WH	69,3	10340	196	220	238
339	77-20694-216	MP44.70P-339-S-3-O-OFF-WH	75,6	11280	216	240	270
367	77-20790-230	MP44.70P-367-S-3-O-OFF-WH	81,9	12220	230	254	288
395	77-20886-250	MP44.70P-395-S-3-O-OFF-WH	88,2	13300	250	280	308
423	77-20982-264	MP44.70P-423-S-3-O-OFF-WH	94,5	14100	264	310	330
451	77-21078-282	MP44.70P-451-S-3-O-OFF-WH	100,8	15040	282	312	350

HIGH WATT

Length (cm)	Code On/off	Description Code	Watt	Lumen	On/off	Triac	Dali
59	77-19740-72	MP44.70P-059-H-3-O-OFF-WH	21,6	3100	72	78	98
87	77-19834-88	MP44.70P-087-H-3-O-OFF-WH	32,4	4650	88	100	116
115	77-19930-100	MP44.70P-115-H-3-O-OFF-WH	43,2	6200	100	112	126
143	77-20026-114	MP44.70P-143-H-3-O-OFF-WH	54	7750	114	132	142
171	77-20122-142	MP44.70P-171-H-3-O-OFF-WH	64,8	9300	142	160	166
199	77-20218-156	MP44.70P-199-H-3-O-OFF-WH	75,6	10850	156	180	180
227	77-20314-162	MP44.70P-227-H-3-O-OFF-WH	86,4	12480	162	190	190
255	77-20410-182	MP44.70P-255-H-3-O-OFF-WH	97,2	14040	182	212	136
283	77-20506-194	MP44.70P-283-H-3-O-OFF-WH	108	15500	194	224	156
311	77-20602-212	MP44.70P-311-H-3-O-OFF-WH	118,8	17050	212	148	274
339	77-20698-224	MP44.70P-339-H-3-O-OFF-WH	129,6	18600	224	260	292
367	77-20794-264	MP44.70P-367-H-3-O-OFF-WH	140,4	20280	264	306	328
395	77-20890-278	MP44.70P-395-H-3-O-OFF-WH	151,2	21700	278	326	358
423	77-20986-292	MP44.70P-423-H-3-O-OFF-WH	162	23250	292	340	378
451	77-21082-312	MP44.70P-451-H-3-O-OFF-WH	172,8	24800	312	366	408

Δυνατότητα επιλογής Kelvin, αλλάζοντας το **3** (3000K) σε **4** (4000K), εάν επιθυμείτε ο φωτισμός σας να είναι 4000K αντί για 3000K.
 Δυνατότητα επιλογής μεταξύ Opal ή Κυψέλης, αλλάζοντας το **O** (OPAL) σε **MP** (HONEYCOMB), σύμφωνα με την επιθυμία σας.
 Δυνατότητα επιλογής μετασχηματιστή Triac ή Dali, αλλάζοντας το **OF** (ON/OFF) σε **T** (TRIAC) ή **D** (DALI), σύμφωνα με την επιλογή σας.
 Δυνατότητα επιλογής χρώματος, αλλάζοντας το **BL** (Μαύρο) σε **WH** (Άσπρο), **GR** (Γκρι) ή **SR** (Special Ral).



Επεξήγηση Τιμοκαταλόγων

Για Κυψέλη από μήκος 059-115 επιπλέον 6€ στην τιμή καταλόγου, από μήκος 143-227 επιπλέον 12€, από μήκος 255-339 επιπλέον 18€ και από μήκος 367-451 επιπλέον 24€ στην τιμή καταλόγου. Για τους μετασχηματιστές οι τιμές βρίσκονται στη λίστα παραπάνω. Για Special Ral επιπλέον 10% στην τιμή καταλόγου.

Για να δημιουργήσετε τον προσωπικό σας κωδικό μπορείτε να επισκεφτείτε το site μας www.masterlighting.gr ή μπορείτε να πάτε στην προηγούμενη σελίδα...

Η τιμή καταλόγου καθώς και ο κωδικός 77-XXXX-XXX διαφέρει ανάλογα με τις επιλογές σας. Περιλαμβάνονται όλα τα εξαρτήματα ανάρτησης.

Profile - MP44.56

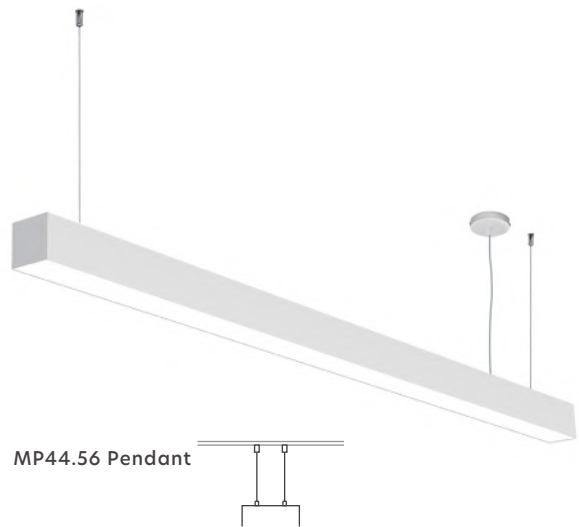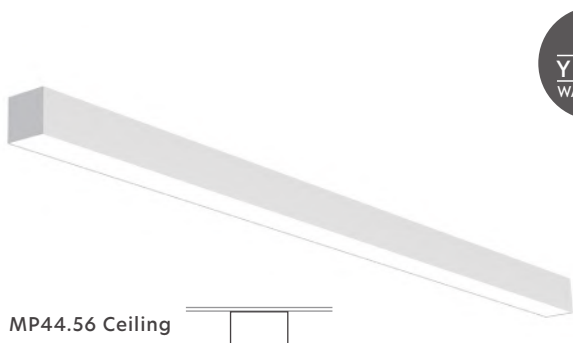

MP44.56 Pendant or Ceiling

Is a led profile luminaire, body of aluminum, painted with electrostatic paint with a matte finish. Designed for ceiling or pendant mounting, providing direct light through an opal diffuser or honeycomb. Luminaire equipped with the best quality Samsung led chips 200Lm/W and KGP drivers.

MP44.56 Κρεμαστό ή Οροφής

Είναι φωτιστικό προφίλ led, σώμα από αλουμίνιο, βαμμένο με ηλεκτροστατική βαφή με ματ φινιρίσμα. Σχεδιασμένο για τοποθέτηση σε οροφή ή κρεμαστό, παρέχοντας άμεσο φωτισμό μέσω της opal διάχυσης ή κηρήθρας. Φωτιστικό εξοπλισμένο με την καλύτερη ποιότητα. Προγράμματα οδήγησης Samsung led chips 200Lm/W και KGP.

Main Features

● Black ● White ● Grey ● Special Ral



Characteristics and Advantages

- Available from 59cm to 451cm
- Opal diffuser UGR<22 or Honeycomb UGR<15
- Beam Angle (Opal 120°, Honeycomb 30°)
- Three types of driver (ON-OFF, DALI, TRIAC with the ability TUYA)
- Coming in White, Black, Grey or optionally Special Ral
- Included 1,5m wire adjustable suspension. Request for 3m or 5m
- Low operating temperature due to excellent heat induction
- Excellent performance with low power consumption

Χαρακτηριστικά και Πλεονεκτήματα

- Διατίθεται από 59cm έως 451cm
- Διαχυτής Opal UGR<22 ή Κυψέλης UGR<15
- Γωνία δέσμης (Opal 120°, Κυψέλης 30°)
- Τρεις τύποι μετασχηματιστών (ON-OFF, DALI, TRIAC με δυνατότητα TUYA)
- Διατίθεται σε λευκό, μαύρο, γκρι ή προαιρετικά Special Ral
- Περιλαμβάνεται συρμάτινη ρυθμιζόμενη ανάρτηση 1,5m. Αίτημα για 3m ή 5m.
- Χαμηλή θερμοκρασία λειτουργίας λόγω εξαιρετικής επαγωγής θερμότητας
- Εξαιρετική απόδοση με χαμηλή κατανάλωση ενέργειας

All the hanging and ceiling metal safety accessories are included.

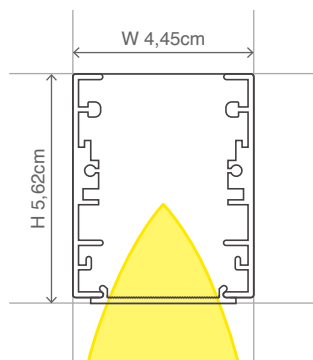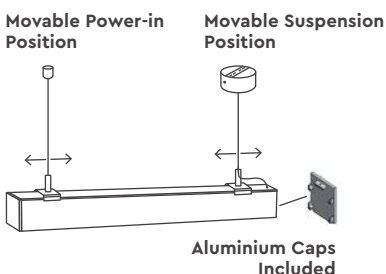

MASTER PROFILES							
Length cm	Standart Watt			Length cm	High Watt		
	Watt	Lumen 3.000K	Lumen 4.000K		Watt	Lumen 3.000K	Lumen 4.000K
59	12,6	1880	1900	59	21,6	3100	3120
87	18,9	2820	2850	87	32,4	4650	4680
115	25,2	3760	3800	115	43,2	6200	6240
143	31,5	4700	4750	143	54	7750	7800
171	37,8	5640	5700	171	64,8	9300	9360
199	44,1	6580	6650	199	75,6	10850	10920
227	50,4	7520	7600	227	86,4	12400	12480
255	56,7	8460	8550	255	97,2	13950	14040
283	63	9400	9500	283	108	15500	15600
311	69,3	10340	10450	311	118,8	17050	17160
339	75,6	11280	11400	339	129,6	18600	18720
367	81,9	12220	12350	367	140,4	20150	20280
395	88,2	13160	13300	395	151,2	21700	21840
423	94,5	14100	14250	423	162	23250	23400
451	100,8	15040	15200	451	172,8	24800	24960




Build your own code:

Your Code: MP44.56

Example Code:

MP44.56P-143-H-4-O-T-WH

Structure	Length	Watt Power	Kelvin	Optic Diffuser	Driver	Body Color
P	143	H	4	O	T	WH
Structure	Length	Watt Power	Kelvin	Optic Diffuser	Driver	Body Color



Opal Diffuser

Choose Technical Configurations

Structure	Length	Watt Power	Kelvin	Optic Diffuser	Driver	Body Color
C = Ceiling P = Pendant	059 = 59 087 = 87 115 = 115 143 = 143 171 = 171 199 = 199 227 = 227 255 = 255 283 = 283 311 = 311 339 = 339 367 = 367 395 = 395 423 = 423 451 = 451	S = Standart H = High	3 = 3.000K 4 = 4.000K	O = Opal Diffuser MP = Honeycomb Diffuser	OF = ON-OFF D = Dali T = Triac	WH = White BL = Black GR = Grey SR = Special Ral





Honeycomb Diffuser



TU YA SWITCH
77-50498-40
Only with Triac Driver

*You can only choose from the choices above

MP44.56 Ceiling

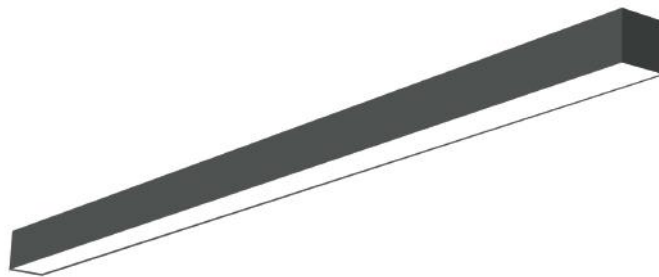

MP44.56 CEILING BLACK

STANDART WATT

Length (cm)	Code On/off	Description Code	Watt	Lumen	On/off	Triac	Dali
59	77-13594-58	MP44.56C-059-S-3-O-OFF-BL	12,6	1880	58	64	88
87	77-13690-68	MP44.56C-087-S-3-O-OFF-BL	18,9	2820	68	74	100
115	77-13786-80	MP44.56C-115-S-3-O-OFF-BL	25,2	3760	80	92	106
143	77-13882-90	MP44.56C-143-S-3-O-OFF-BL	31,5	4700	90	102	118
171	77-13978-106	MP44.56C-171-S-3-O-OFF-BL	37,8	5640	106	112	134
199	77-14074-116	MP44.56C-199-S-3-O-OFF-BL	44,1	6580	116	134	148
227	77-14170-130	MP44.56C-227-S-3-O-OFF-BL	50,4	7520	130	148	160
255	77-14266-138	MP44.56C-255-S-3-O-OFF-BL	56,7	8460	138	156	176
283	77-14362-148	MP44.56C-283-S-3-O-OFF-BL	63	9400	148	166	186
311	77-14458-162	MP44.56C-311-S-3-O-OFF-BL	69,3	10340	162	186	202
339	77-14554-178	MP44.56C-339-S-3-O-OFF-BL	75,6	11280	178	202	232
367	77-14650-188	MP44.56C-367-S-3-O-OFF-BL	81,9	12220	188	212	244
395	77-14746-200	MP44.56C-395-S-3-O-OFF-BL	88,2	13160	200	230	256
423	77-14842-206	MP44.56C-423-S-3-O-OFF-BL	94,5	14100	206	236	272
451	77-14938-222	MP44.56C-451-S-3-O-OFF-BL	100,8	15040	222	252	282

HIGH WATT

Length (cm)	Code On/off	Description Code	Watt	Lumen	On/off	Triac	Dali
59	77-13598-62	MP44.56C-059-H-3-O-OFF-BL	21,6	3100	62	68	88
87	77-13694-76	MP44.56C-087-H-3-O-OFF-BL	32,4	4650	76	88	100
115	77-13790-96	MP44.56C-115-H-3-O-OFF-BL	43,2	6200	96	108	112
143	77-13886-102	MP44.56C-143-H-3-O-OFF-BL	54	7750	102	120	122
171	77-13982-122	MP44.56C-171-H-3-O-OFF-BL	64,8	9300	122	140	148
199	77-14078-134	MP44.56C-199-H-3-O-OFF-BL	75,6	10850	134	158	158
227	77-14174-144	MP44.56C-227-H-3-O-OFF-BL	86,4	12400	144	168	168
255	77-14270-154	MP44.56C-255-H-3-O-OFF-BL	97,2	13950	154	184	206
283	77-14366-164	MP44.56C-283-H-3-O-OFF-BL	108	15500	164	194	224
311	77-14462-180	MP44.56C-311-H-3-O-OFF-BL	118,8	17050	180	216	242
339	77-14558-192	MP44.56C-339-H-3-O-OFF-BL	129,6	18600	192	228	258
367	77-14654-226	MP44.56C-367-H-3-O-OFF-BL	140,4	20150	226	268	272
395	77-14750-240	MP44.56C-395-H-3-O-OFF-BL	151,2	21700	240	288	282
423	77-14846-250	MP44.56C-423-H-3-O-OFF-BL	162	23250	250	298	296
451	77-14941-260	MP44.56C-451-H-3-O-OFF-BL	172,8	24800	260	314	306

Ability to select Kelvin, changing the **3** (3000K) to **4** (4000K), if you wish your lighting to be 4000k than 3000k.
 Ability to select between Opal or Honeycomb, changing the **O** (OPAL) to **MP** (HONEYCOMB), according to your desire.
 Ability to select Driver Triac or Dali, changing the **OF** (ON/OFF) to **T** (TRIAC) or **D** (DALI), according to your desire of Driver.
 Ability to select Color, changing the **BL** (BLACK) to **WH** (WHITE), **GR** (GREY) or **SR** (SPECIAL RAL), according to your desire.

Price Catalogue Explanation


For Honeycomb from length 059-115 extra 6€ to the price catalogue, from 143-227 extra 12€, from 255-339 extra 18€ and from 367-451 extra 24€. For Drivers the prices are on the list. For Special Ral extra 10% to the price catalogue.

To build your personal code you can visit our site www.masterlighting.gr or you can go to the previous page....

The price catalogue as well as the code 77-XXXXX-XXX varies according to your options.

Included all the ceiling accessories.

MP44.56 Pendant



MP44.56 PENDANT WHITE

STANDART WATT

Length (cm)	Code On/off	Description Code	Watt	Lumen	On/off	Triac	Dali
59	77-21174-62	MP44.56P-059-S-3-O-OFF-WH	12,6	1900	62	68	92
87	77-21270-72	MP44.56P-087-S-3-O-OFF-WH	18,9	2820	72	78	104
115	77-21366-84	MP44.56P-115-S-3-O-OFF-WH	25,2	3800	84	96	110
143	77-21462-94	MP44.56P-143-S-3-O-OFF-WH	31,5	4700	94	106	122
171	77-21558-110	MP44.56P-171-S-3-O-OFF-WH	37,8	5640	110	122	138
199	77-21654-120	MP44.56P-199-S-3-O-OFF-WH	44,1	6580	120	138	150
227	77-21750-134	MP44.56P-227-S-3-O-OFF-WH	50,4	7520	134	152	164
255	77-21846-142	MP44.56P-255-S-3-O-OFF-WH	56,7	8460	142	160	180
283	77-21942-152	MP44.56P-283-S-3-O-OFF-WH	63	9400	152	170	190
311	77-22038-166	MP44.56P-311-S-3-O-OFF-WH	69,3	10340	166	190	206
339	77-22134-182	MP44.56P-339-S-3-O-OFF-WH	75,6	11280	182	206	232
367	77-22230-192	MP44.56P-367-S-3-O-OFF-WH	81,9	12220	192	216	248
395	77-22326-204	MP44.56P-395-S-3-O-OFF-WH	88,2	13300	204	234	260
423	77-22422-214	MP44.56P-423-S-3-O-OFF-WH	94,5	14100	214	244	276
451	77-22516-226	MP44.56P-451-S-3-O-OFF-WH	100,8	15040	226	256	286

HIGH WATT

Length (cm)	Code On/off	Description Code	Watt	Lumen	On/off	Triac	Dali
59	77-21178-66	MP44.56P-059-H-3-O-OFF-WH	21,6	3100	66	72	92
87	77-21274-72	MP44.56P-087-H-3-O-OFF-WH	32,4	4650	72	84	104
115	77-21370-100	MP44.56P-115-H-3-O-OFF-WH	43,2	6200	100	112	116
143	77-21466-108	MP44.56P-143-H-3-O-OFF-WH	54	7750	108	126	126
171	77-21562-126	MP44.56P-171-H-3-O-OFF-WH	64,8	9300	126	144	150
199	77-21658-138	MP44.56P-199-H-3-O-OFF-WH	75,6	10850	138	162	158
227	77-21754-148	MP44.56P-227-H-3-O-OFF-WH	86,4	12480	148	172	172
255	77-21850-158	MP44.56P-255-H-3-O-OFF-WH	97,2	14040	158	188	210
283	77-21946-168	MP44.56P-283-H-3-O-OFF-WH	108	15500	168	194	228
311	77-22042-184	MP44.56P-311-H-3-O-OFF-WH	118,8	17050	184	220	246
339	77-22138-196	MP44.56P-339-H-3-O-OFF-WH	129,6	18600	196	232	262
367	77-22234-230	MP44.56P-367-H-3-O-OFF-WH	140,4	20280	230	272	276
395	77-22330-244	MP44.56P-395-H-3-O-OFF-WH	151,2	21700	244	292	290
423	77-22426-254	MP44.56P-423-H-3-O-OFF-WH	162	23250	254	302	300
451	77-22520-264	MP44.56P-451-H-3-O-OFF-WH	172,8	24800	264	318	310

Δυνατότητα επιλογής Kelvin, αλλάζοντας το **3** (3000K) σε **4** (4000K), εάν επιθυμείτε ο φωτισμός σας να είναι 4000K αντί για 3000K.
 Δυνατότητα επιλογής μεταξύ Opal ή Κυψέλης, αλλάζοντας το **O** (OPAL) σε **MP** (HONEYCOMB), σύμφωνα με την επιθυμία σας.
 Δυνατότητα επιλογής μετασχηματιστή Triac ή Dali, αλλάζοντας το **OF** (ON/OFF) σε **T** (TRIAC) ή **D** (DALI), σύμφωνα με την επιλογή σας.
 Δυνατότητα επιλογής χρώματος, αλλάζοντας το **BL** (Μαύρο) σε **WH** (Άσπρο), **GR** (Γκρι) ή **SR** (Special Ral).


Επεξήγηση Τιμοκαταλόγων

Για Κυψέλη από μήκος 059-115 επιπλέον 6€ στην τιμή καταλόγου, από μήκος 143-227 επιπλέον 12€, από μήκος 255-339 επιπλέον 18€ και από μήκος 367-451 επιπλέον 24€ στην τιμή καταλόγου. Για τους μετασχηματιστές οι τιμές βρίσκονται στη λίστα παραπάνω. Για Special Ral επιπλέον 10% στην τιμή καταλόγου.


Για να δημιουργήσετε τον προσωπικό σας κωδικό μπορείτε να επισκεφτείτε το site μας www.masterlighting.gr ή μπορείτε να πάτε στην προηγούμενη σελίδα...

Η τιμή καταλόγου καθώς και ο κωδικός 77-XXXX-XXX διαφέρει ανάλογα με τις επιλογές σας. Περιλαμβάνονται όλα τα εξαρτήματα ανάρτησης.

Profile - MP27.70

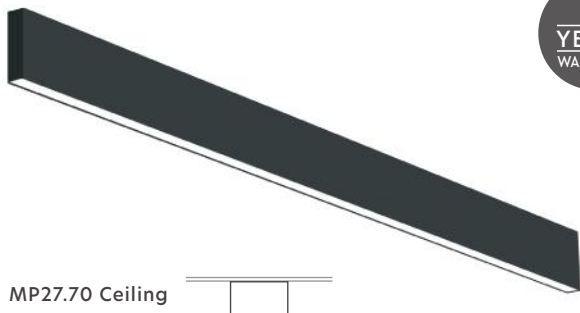

MP27.70 Ceiling

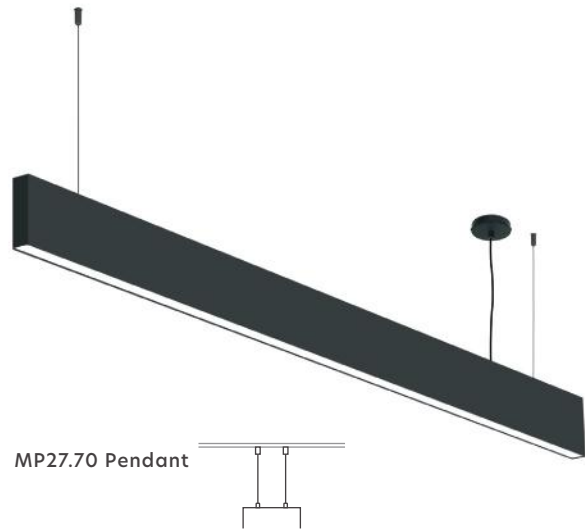

MP27.70 Pendant



MP27.70 Pendant or Ceiling

Is a led profile luminaire, body of aluminum, painted with electrostatic paint with a matte finish. Designed for ceiling or pendant mounting, providing direct light through an opal diffuser or honeycomb. Luminaire equipped with the best quality Samsung led chips 200Lm/W and KGP drivers.

MP27.70 Κρεμαστό ή Οροφής

Είναι φωτιστικό προφίλ led, σώμα από αλουμίνιο, βαμμένο με ηλεκτροστατική βαφή με ματ φινίρισμα. Σχεδιασμένο για τοποθέτηση σε οροφή ή κρεμαστό, παρέχοντας άμεσο φωτισμό μέσω της opal διάχυσης ή κηρήθρας. Φωτιστικό εξοπλισμένο με την καλύτερη ποιότητα. Προγράμματα οδήγησης Samsung led chips 200Lm/W και KGP.

Main Features

● Black ● White ● Grey ● Special Ral




Characteristics and Advantages

- Available from 59cm to 451cm
- Opal diffuser UGR<22 or Honeycomb UGR<15
- Beam Angle (Opal 120°, Honeycomb 30°)
- Three types of driver (ON-OFF, DALI, TRIAC with the ability TUYA)
- Coming in White, Black, Grey or optionally Special Ral
- Included 1,5m wire adjustable suspension. Request for 3m or 5m
- Low operating temperature due to excellent heat induction
- Excellent performance with low power consumption

Χαρακτηριστικά και Πλεονεκτήματα

- Διατίθεται από 59cm έως 451cm
- Διαχυτής Opal UGR<22 ή Κυψέλης UGR<15
- Γωνία δέσμης (Opal 120°, Κυψέλης 30°)
- Τρεις τύποι μετασχηματιστών (ON-OFF, DALI, TRIAC με δυνατότητα TUYA)
- Διατίθεται σε λευκό, μαύρο, γκρι ή προαιρετικά Special Ral
- Περιλαμβάνεται συρμάτινη ρυθμιζόμενη ανάρτηση 1,5m. Αίτημα για 3m ή 5m.
- Χαμηλή θερμοκρασία λειτουργίας λόγω εξαιρετικής επαγωγής θερμότητας
- Εξαιρετική απόδοση με χαμηλή κατανάλωση ενέργειας

All the hanging and ceiling metal safety accessories are included.

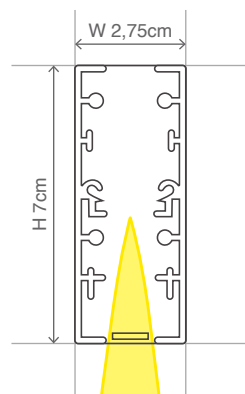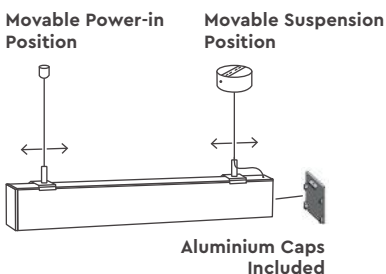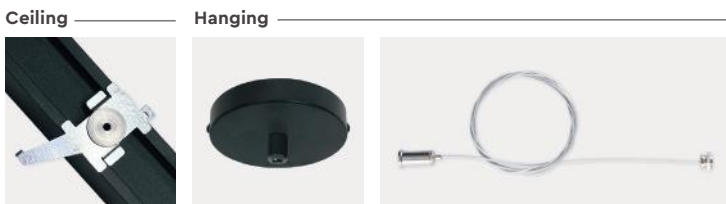

MASTER PROFILES							
Length cm	Standart Watt			Length cm	High Watt		
	Watt	Lumen 3.000K	Lumen 4.000K		Watt	Lumen 3.000K	Lumen 4.000K
59	12,6	1880	1900	59	21,6	3100	3120
87	18,9	2820	2850	87	32,4	4650	4680
115	25,2	3760	3800	115	43,2	6200	6240
143	31,5	4700	4750	143	54	7750	7800
171	37,8	5640	5700	171	64,8	9300	9360
199	44,1	6580	6650	199	75,6	10850	10920
227	50,4	7520	7600	227	86,4	12400	12480
255	56,7	8460	8550	255	97,2	13950	14040
283	63	9400	9500	283	108	15500	15600
311	69,3	10340	10450	311	118,8	17050	17160
339	75,6	11280	11400	339	129,6	18600	18720
367	81,9	12220	12350	367	140,4	20150	20280
395	88,2	13160	13300	395	151,2	21700	21840
423	94,5	14100	14250	423	162	23250	23400
451	100,8	15040	15200	451	172,8	24800	24960



Build your own code:

Your Code: MP27.70

Example Code:

MP27.70C-115-S-3-O-T-BL

Structure	Length	Watt Power	Kelvin	Optic Diffuser	Driver	Body Color
C	115	S	3	O	T	BL
Structure	Length	Watt Power	Kelvin	Optic Diffuser	Driver	Body Color



Opal Diffuser

Choose Technical Configurations

Structure	Length	Watt Power	Kelvin	Optic Diffuser	Driver	Body Color
C = Ceiling P = Pendant	059 = 59 087 = 87 115 = 115 143 = 143 171 = 171 199 = 199 227 = 227 255 = 255 283 = 283 311 = 311 339 = 339 367 = 367 395 = 395 423 = 423 451 = 451	S = Standart H = High	3 = 3.000K 4 = 4.000K	O = Opal Diffuser MP = Honeycomb Diffuser	OF = ON-OFF D = Dali T = Triac	WH = White BL = Black GR = Grey SR = Special Ral





Honeycomb Diffuser



TUYA SWITCH
77-50498-40
Only with Triac Driver

*You can only choose from the choices above

MP27.70 Ceiling

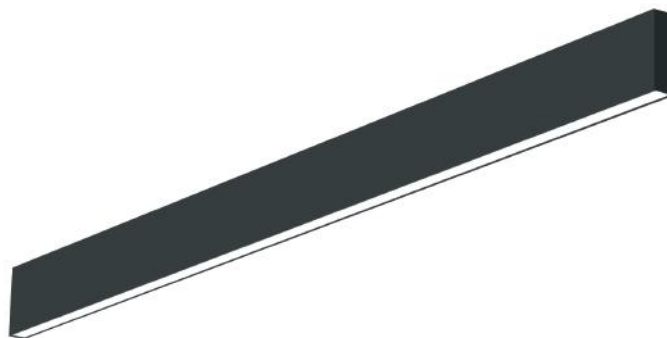

MP27.70 CEILING BLACK

STANDART WATT

Length (cm)	Code On/off	Description Code	Watt	Lumen	On/off	Triac
59	77-15034-66	MP27.70C-059-S-3-O-OFF-BL	12,6	1880	66	66
87	77-15098-70	MP27.70C-087-S-3-O-OFF-BL	18,9	2820	70	70
115	77-15162-77	MP27.70C-115-S-3-O-OFF-BL	25,2	3760	77	77
143	77-15226-86	MP27.70C-143-S-3-O-OFF-BL	31,5	4700	86	86
171	77-15290-96	MP27.70C-171-S-3-O-OFF-BL	37,8	5640	96	96
199	77-15354-110	MP27.70C-199-S-3-O-OFF-BL	44,1	6580	110	110
227	77-15418-116	MP27.70C-227-S-3-O-OFF-BL	50,4	7520	116	116
255	77-15482-120	MP27.70C-255-S-3-O-OFF-BL	56,7	8460	120	120
283	77-15546-124	MP27.70C-283-S-3-O-OFF-BL	63	9400	124	124
311	77-15610-142	MP27.70C-311-S-3-O-OFF-BL	69,3	10340	142	142
339	77-15674-152	MP27.70C-339-S-3-O-OFF-BL	75,6	11280	152	152
367	77-15738-156	MP27.70C-367-S-3-O-OFF-BL	81,9	12220	156	156
395	77-15802-172	MP27.70C-395-S-3-O-OFF-BL	88,2	13160	172	172
423	77-15866-186	MP27.70C-423-S-3-O-OFF-BL	94,5	14100	186	186
451	77-15930-206	MP27.70C-451-S-3-O-OFF-BL	100,8	15040	206	206

HIGH WATT

Length (cm)	Code On/off	Description Code	Watt	Lumen	On/off	Triac
59	77-15038-70	MP27.70C-059-H-3-O-OFF-BL	21,6	3100	70	70
87	77-15102-82	MP27.70C-087-H-3-O-OFF-BL	32,4	4650	82	82
115	77-15166-88	MP27.70C-115-H-3-O-OFF-BL	43,2	6200	88	88
143	77-15230-100	MP27.70C-143-H-3-O-OFF-BL	54	7750	100	100
171	77-15294-120	MP27.70C-171-H-3-O-OFF-BL	64,8	9300	120	120
199	77-15358-130	MP27.70C-199-H-3-O-OFF-BL	75,6	10850	130	130
227	77-15422-138	MP27.70C-227-H-3-O-OFF-BL	86,4	12400	138	138
255	77-15486-146	MP27.70C-255-H-3-O-OFF-BL	97,2	13950	146	146
283	77-15550-150	MP27.70C-283-H-3-O-OFF-BL	108	15500	150	150
311	77-15614-168	MP27.70C-311-H-3-O-OFF-BL	118,8	17050	168	168
339	77-15678-172	MP27.70C-339-H-3-O-OFF-BL	129,6	18600	172	172
367	77-15742-206	MP27.70C-367-H-3-O-OFF-BL	140,4	20150	206	206
395	77-15806-260	MP27.70C-395-H-3-O-OFF-BL	151,2	21700	260	260
423	77-15870-270	MP27.70C-423-H-3-O-OFF-BL	162	23250	270	270
451	77-15934-296	MP27.70C-451-H-3-O-OFF-BL	172,8	24800	296	296

Ability to select Kelvin, changing the **3** (3000K) to **4** (4000K), if you wish your lighting to be 4000k than 3000k.
 Ability to select between Opal or Honeycomb, changing the **O** (OPAL) to **MP** (HONEYCOMB), according to your desire.
 Ability to select Driver Triac or Dali, changing the **OF** (ON/OFF) to **T** (TRIAC) or **D** (DALI), according to your desire of Driver.
 Ability to select Color, changing the **BL** (BLACK) to **WH** (WHITE), **GR** (GREY) or **SR** (SPECIAL RAL), according to your desire.

Price Catalogue Explanation


For Honeycomb from length 059-115 extra 6€ to the price catalogue, from 143-227 extra 12€, from 255-339 extra 18€ and from 367-451 extra 24€. For Drivers the prices are on the list. For Special Ral extra 10% to the price catalogue.

To build your personal code you can visit our site www.masterlighting.gr or you can go to the previous page....

The price catalogue as well as the code 77-XXXXX-XXX varies according to your options.

Included all the ceiling accessories.

MP27.70 Pendant



MP27.70 PENDANT WHITE

STANDART WATT

Length (cm)	Code On/off	Description Code	Watt	Lumen	On/off	Triac
59	77-22612-70	MP27.70P-059-S-3-O-OFF-WH	12,6	1900	70	70
87	77-22675-74	MP27.70P-087-S-3-O-OFF-WH	18,9	2820	74	74
115	77-22739-84	MP27.70P-115-S-3-O-OFF-WH	25,2	3800	84	84
143	77-22803-90	MP27.70P-143-S-3-O-OFF-WH	31,5	4700	90	90
171	77-22867-100	MP27.70P-171-S-3-O-OFF-WH	37,8	5640	100	100
199	77-22931-114	MP27.70P-199-S-3-O-OFF-WH	44,1	6580	114	114
227	77-22995-120	MP27.70P-227-S-3-O-OFF-WH	50,4	7520	120	120
255	77-23059-124	MP27.70P-255-S-3-O-OFF-WH	56,7	8460	124	124
283	77-23123-128	MP27.70P-283-S-3-O-OFF-WH	63	9400	128	128
311	77-23187-146	MP27.70P-311-S-3-O-OFF-WH	69,3	10340	146	146
339	77-23251-156	MP27.70P-339-S-3-O-OFF-WH	75,6	11280	156	156
367	77-23315-160	MP27.70P-367-S-3-O-OFF-WH	81,9	12220	160	160
395	77-23379-176	MP27.70P-395-S-3-O-OFF-WH	88,2	13300	176	176
423	77-23443-190	MP27.70P-423-S-3-O-OFF-WH	94,5	14100	190	190
451	77-23507-210	MP27.70P-451-S-3-O-OFF-WH	100,8	15040	210	210

HIGH WATT

Length (cm)	Code On/off	Description Code	Watt	Lumen	On/off	Triac
59	77-22615-74	MP27.70P-059-H-3-O-OFF-WH	21,6	3100	74	74
87	77-22679-86	MP27.70P-087-H-3-O-OFF-WH	32,4	4650	86	86
115	77-22743-92	MP27.70P-115-H-3-O-OFF-WH	43,2	6200	92	92
143	77-22807-104	MP27.70P-143-H-3-O-OFF-WH	54	7750	104	104
171	77-22871-124	MP27.70P-171-H-3-O-OFF-WH	64,8	9300	124	124
199	77-22935-134	MP27.70P-199-H-3-O-OFF-WH	75,6	10850	134	134
227	77-22999-142	MP27.70P-227-H-3-O-OFF-WH	86,4	12480	142	142
255	77-23063-150	MP27.70P-255-H-3-O-OFF-WH	97,2	14040	150	150
283	77-23127-154	MP27.70P-283-H-3-O-OFF-WH	108	15500	154	154
311	77-23191-172	MP27.70P-311-H-3-O-OFF-WH	118,8	17050	172	172
339	77-23255-176	MP27.70P-339-H-3-O-OFF-WH	129,6	18600	176	176
367	77-23319-210	MP27.70P-367-H-3-O-OFF-WH	140,4	20280	210	210
395	77-23383-264	MP27.70P-395-H-3-O-OFF-WH	151,2	21700	264	264
423	77-23447-274	MP27.70P-423-H-3-O-OFF-WH	162	23250	274	274
451	77-23511-300	MP27.70P-451-H-3-O-OFF-WH	172,8	24800	300	300

Δυνατότητα επιλογής Kelvin, αλλάζοντας το **3** (3000K) σε **4** (4000K), εάν επιθυμείτε ο φωτισμός σας να είναι 4000K αντί για 3000K.
 Δυνατότητα επιλογής μεταξύ Opal ή Κυψέλης, αλλάζοντας το **O** (OPAL) σε **MP** (HONEYCOMB), σύμφωνα με την επιθυμία σας.
 Δυνατότητα επιλογής μετασχηματιστή Triac ή Dalí, αλλάζοντας το **OF** (ON/OFF) σε **T** (TRIAC) ή **D** (DALI), σύμφωνα με την επιλογή σας.
 Δυνατότητα επιλογής χρώματος, αλλάζοντας το **BL** (Μαύρο) σε **WH** (Άσπρο), **GR** (Γκρι) ή **SR** (Special Ral).



Επεξήγηση Τιμοκαταλόγων

Για Κυψέλη από μήκος 059-115 επιπλέον 6€ στην τιμή καταλόγου, από μήκος 143-227 επιπλέον 12€, από μήκος 255-339 επιπλέον 18€ και από μήκος 367-451 επιπλέον 24€ στην τιμή καταλόγου. Για τους μετασχηματιστές οι τιμές βρίσκονται στη λίστα παραπάνω. Για Special Ral επιπλέον 10% στην τιμή καταλόγου.

Για να δημιουργήσετε τον προσωπικό σας κωδικό μπορείτε να επισκεφτείτε το site μας www.masterlighting.gr ή μπορείτε να πάτε στην προηγούμενη σελίδα...

Η τιμή καταλόγου καθώς και ο κωδικός 77-XXXX-XXX διαφέρει ανάλογα με τις επιλογές σας. Περιλαμβάνονται όλα τα εξαρτήματα ανάρτησης.

Profile - MP27.56

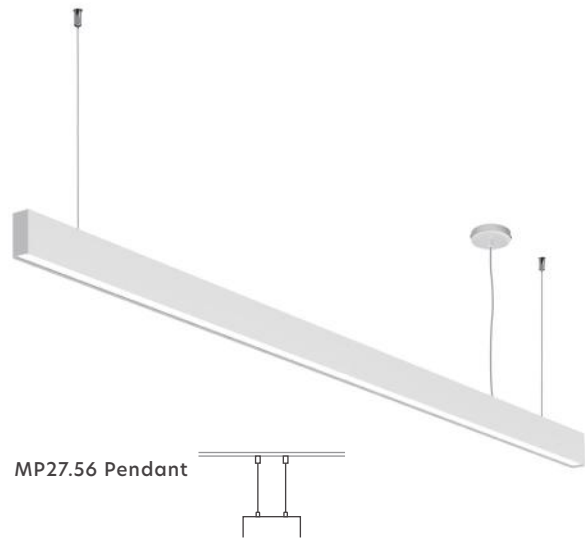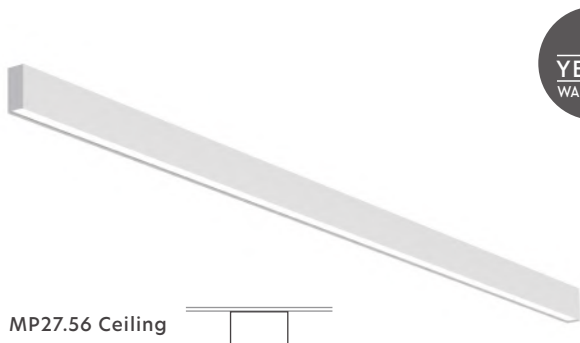

MP27.56 Pendant or Ceiling

Is a led profile luminaire, body of aluminum, painted with electrostatic paint with a matte finish. Designed for ceiling or pendant mounting, providing direct light through an opal diffuser or honeycomb. Luminaire equipped with the best quality Samsung led chips 200Lm/W and KGP drivers.

MP27.56 Κρεμαστό ή Οροφής

Είναι φωτιστικό προφίλ led, σώμα από αλουμίνιο, βαμμένο με ηλεκτροστατική βαφή με ματ φινίρισμα. Σχεδιασμένο για τοποθέτηση σε οροφή ή κρεμαστό, παρέχοντας άμεσο φωτισμό μέσω της opal διάχυσης ή κηρήθρας. Φωτιστικό εξοπλισμένο με την καλύτερη ποιότητα. Προγράμματα οδήγησης Samsung led chips 200Lm/W και KGP.

Main Features

● Black ● White ● Grey ● Special Ral



Characteristics and Advantages

- Available from 59cm to 451cm
- Opal diffuser UGR<22 or Honeycomb UGR<15
- Beam Angle (Opal 120°, Honeycomb 30°)
- Three types of driver (ON-OFF, DALI, TRIAC with the ability TUYA)
- Coming in White, Black, Grey or optionally Special Ral
- Included 1,5m wire adjustable suspension. Request for 3m or 5m
- Low operating temperature due to excellent heat induction
- Excellent performance with low power consumption

Χαρακτηριστικά και Πλεονεκτήματα

- Διατίθεται από 59cm έως 451cm
- Διαχυτής Opal UGR<22 ή Κυψέλης UGR<15
- Γωνία δέσμης (Opal 120°, Κυψέλης 30°)
- Τρεις τύποι μετασχηματιστών (ON-OFF, DALI, TRIAC με δυνατότητα TUYA)
- Διατίθεται σε λευκό, μαύρο, γκρι ή προαιρετικά Special Ral
- Περιλαμβάνεται συρμάτινη ρυθμιζόμενη ανάρτηση 1,5m. Αίτημα για 3m ή 5m.
- Χαμηλή θερμοκρασία λειτουργίας λόγω εξαιρετικής επαγωγής θερμότητας
- Εξαιρετική απόδοση με χαμηλή κατανάλωση ενέργειας

All the hanging and ceiling metal safety accessories are included.

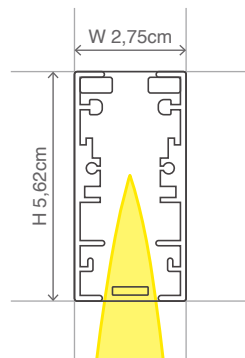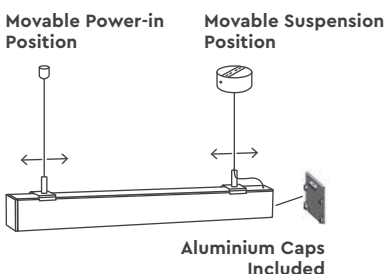

MASTER PROFILES							
Length cm	Standart Watt			Length cm	High Watt		
	Watt	Lumen 3.000K	Lumen 4.000K		Watt	Lumen 3.000K	Lumen 4.000K
59	12,6	1880	1900	59	21,6	3100	3120
87	18,9	2820	2850	87	32,4	4650	4680
115	25,2	3760	3800	115	43,2	6200	6240
143	31,5	4700	4750	143	54	7750	7800
171	37,8	5640	5700	171	64,8	9300	9360
199	44,1	6580	6650	199	75,6	10850	10920
227	50,4	7520	7600	227	86,4	12400	12480
255	56,7	8460	8550	255	97,2	13950	14040
283	63	9400	9500	283	108	15500	15600
311	69,3	10340	10450	311	118,8	17050	17160
339	75,6	11280	11400	339	129,6	18600	18720
367	81,9	12220	12350	367	140,4	20150	20280
395	88,2	13160	13300	395	151,2	21700	21840
423	94,5	14100	14250	423	162	23250	23400
451	100,8	15040	15200	451	172,8	24800	24960



Build your own code:

Your Code: MP27.56

Example Code:

MP27.56C-227-S-3-O-D-WH

Structure	Length	Watt Power	Kelvin	Optic Diffuser	Driver	Body Color
C	227	S	3	O	D	WH
Structure	Length	Watt Power	Kelvin	Optic Diffuser	Driver	Body Color



Opal Diffuser

Choose Technical Configurations

Structure	Length	Watt Power	Kelvin	Optic Diffuser	Driver	Body Color
C = Ceiling P = Pendant	059 = 59 087 = 87 115 = 115 143 = 143 171 = 171 199 = 199 227 = 227 255 = 255 283 = 283 311 = 311 339 = 339 367 = 367 395 = 395 423 = 423 451 = 451	S = Standart H = High	3 = 3.000K 4 = 4.000K	O = Opal Diffuser MP = Honeycomb Diffuser	OF = ON-OFF D = Dali T = Triac	WH = White BL = Black GR = Grey SR = Special Ral




Honeycomb Diffuser



TU YA SWITCH
77-50498-40
Only with Triac Driver

*You can only choose from the choices above

MP27.56 Ceiling



MP27.56 CEILING BLACK

STANDART WATT

Length (cm)	Code On/off	Description Code	Watt	Lumen	On/off	Triac
59	77-15994-60	MP27.56C-059-S-3-O-OFF-BL	12,6	1880	60	60
87	77-16058-62	MP27.56C-087-S-3-O-OFF-BL	18,9	2820	62	62
115	77-16122-70	MP27.56C-115-S-3-O-OFF-BL	25,2	3760	70	70
143	77-16186-72	MP27.56C-143-S-3-O-OFF-BL	31,5	4700	72	72
171	77-16250-80	MP27.56C-171-S-3-O-OFF-BL	37,8	5640	80	80
199	77-16314-92	MP27.56C-199-S-3-O-OFF-BL	44,1	6580	92	92
227	77-16378-96	MP27.56C-227-S-3-O-OFF-BL	50,4	7520	96	96
255	77-16442-98	MP27.56C-255-S-3-O-OFF-BL	56,7	8460	98	98
283	77-16506-100	MP27.56C-283-S-3-O-OFF-BL	63	9400	100	100
311	77-16570-112	MP27.56C-311-S-3-O-OFF-BL	69,3	10340	112	112
339	77-16634-138	MP27.56C-339-S-3-O-OFF-BL	75,6	11280	138	138
367	77-16698-160	MP27.56C-367-S-3-O-OFF-BL	81,9	12220	160	160
395	77-16762-170	MP27.56C-395-S-3-O-OFF-BL	88,2	13160	170	170
423	77-16826-178	MP27.56C-423-S-3-O-OFF-BL	94,5	14100	178	178
451	77-16890-196	MP27.56C-451-S-3-O-OFF-BL	100,8	15040	196	196

HIGH WATT

Length (cm)	Code On/off	Description Code	Watt	Lumen	On/off	Triac
59	77-15998-66	MP27.56C-059-H-3-O-OFF-BL	21,6	3100	66	66
87	77-16062-74	MP27.56C-087-H-3-O-OFF-BL	32,4	4650	74	74
115	77-16126-76	MP27.56C-115-H-3-O-OFF-BL	43,2	6200	76	76
143	77-16190-86	MP27.56C-143-H-3-O-OFF-BL	54	7750	86	86
171	77-16254-104	MP27.56C-171-H-3-O-OFF-BL	64,8	9300	104	104
199	77-16318-112	MP27.56C-199-H-3-O-OFF-BL	75,6	10850	112	112
227	77-16382-120	MP27.56C-227-H-3-O-OFF-BL	86,4	12400	120	120
255	77-16446-128	MP27.56C-255-H-3-O-OFF-BL	97,2	13950	128	128
283	77-16510-134	MP27.56C-283-H-3-O-OFF-BL	108	15500	134	134
311	77-16574-142	MP27.56C-311-H-3-O-OFF-BL	118,8	17050	142	142
339	77-16638-166	MP27.56C-339-H-3-O-OFF-BL	129,6	18600	166	166
367	77-16702-194	MP27.56C-367-H-3-O-OFF-BL	140,4	20150	194	194
395	77-16766-214	MP27.56C-395-H-3-O-OFF-BL	151,2	21700	214	214
423	77-16830-228	MP27.56C-423-H-3-O-OFF-BL	162	23250	228	228
451	77-16894-274	MP27.56C-451-H-3-O-OFF-BL	172,8	24800	274	274

Ability to select Kelvin, changing the **3** (3000K) to **4** (4000K), if you wish your lighting to be 4000k than 3000k.
 Ability to select between Opal or Honeycomb, changing the **O** (OPAL) to **MP** (HONEYCOMB), according to your desire.
 Ability to select Driver Triac or Dali, changing the **OF** (ON/OFF) to **T** (TRIAC) or **D** (DALI), according to your desire of Driver.
 Ability to select Color, changing the **BL** (BLACK) to **WH** (WHITE), **GR** (GREY) or **SR** (SPECIAL RAL), according to your desire.

Price Catalogue Explanation


For Honeycomb from length 059-115 extra 6€ to the price catalogue, from 143-227 extra 12€, from 255-339 extra 18€ and from 367-451 extra 24€. For Drivers the prices are on the list. For Special Ral extra 10% to the price catalogue.

To build your personal code you can visit our site www.masterlighting.gr or you can go to the previous page....

The price catalogue as well as the code 77-XXXXX-XXX varies according to your options.

Included all the ceiling accessories.

MP27.56 Pendant



MP27.56 PENDANT WHITE

STANDART WATT

Length (cm)	Code On/off	Description Code	Watt	Lumen	On/off	Triac
59	77-23571-64	MP27.56P-059-S-3-O-OFF-WH	12,6	1900	64	64
87	77-23635-66	MP27.56P-087-S-3-O-OFF-WH	18,9	2820	66	66
115	77-23699-74	MP27.56P-115-S-3-O-OFF-WH	25,2	3800	74	74
143	77-23763-76	MP27.56P-143-S-3-O-OFF-WH	31,5	4700	76	76
171	77-23827-84	MP27.56P-171-S-3-O-OFF-WH	37,8	5640	84	84
199	77-23891-96	MP27.56P-199-S-3-O-OFF-WH	44,1	6580	96	96
227	77-23955-100	MP27.56P-227-S-3-O-OFF-WH	50,4	7520	100	100
255	77-24019-102	MP27.56P-255-S-3-O-OFF-WH	56,7	8460	102	102
283	77-24083-104	MP27.56P-283-S-3-O-OFF-WH	63	9400	104	104
311	77-24147-116	MP27.56P-311-S-3-O-OFF-WH	69,3	10340	116	116
339	77-24211-142	MP27.56P-339-S-3-O-OFF-WH	75,6	11280	142	142
367	77-24275-164	MP27.56P-367-S-3-O-OFF-WH	81,9	12220	164	164
395	77-24339-174	MP27.56P-395-S-3-O-OFF-WH	88,2	13300	174	174
423	77-24403-182	MP27.56P-423-S-3-O-OFF-WH	94,5	14100	182	182
451	77-24467-200	MP27.56P-451-S-3-O-OFF-WH	100,8	15040	200	200

HIGH WATT

Length (cm)	Code On/off	Description Code	Watt	Lumen	On/off	Triac
59	77-23575-70	MP27.56P-059-H-3-O-OFF-WH	21,6	3100	70	70
87	77-23639-78	MP27.56P-087-H-3-O-OFF-WH	32,4	4650	78	78
115	77-23703-80	MP27.56P-115-H-3-O-OFF-WH	43,2	6200	80	80
143	77-23767-90	MP27.56P-143-H-3-O-OFF-WH	54	7750	90	90
171	77-23831-108	MP27.56P-171-H-3-O-OFF-WH	64,8	9300	108	108
199	77-23895-116	MP27.56P-199-H-3-O-OFF-WH	75,6	10850	116	116
227	77-23959-124	MP27.56P-227-H-3-O-OFF-WH	86,4	12480	124	124
255	77-24023-132	MP27.56P-255-H-3-O-OFF-WH	97,2	14040	132	132
283	77-24087-138	MP27.56P-283-H-3-O-OFF-WH	108	15500	138	138
311	77-24151-146	MP27.56P-311-H-3-O-OFF-WH	118,8	17050	146	146
339	77-24215-170	MP27.56P-339-H-3-O-OFF-WH	129,6	18600	170	170
367	77-24279-198	MP27.56P-367-H-3-O-OFF-WH	140,4	20280	198	198
395	77-24343-218	MP27.56P-395-H-3-O-OFF-WH	151,2	21700	218	218
423	77-24407-232	MP27.56P-423-H-3-O-OFF-WH	162	23250	232	232
451	77-24471-298	MP27.56P-451-H-3-O-OFF-WH	172,8	24800	298	298

Δυνατότητα επιλογής Kelvin, αλλάζοντας το **3** (3000K) σε **4** (4000K), εάν επιθυμείτε ο φωτισμός σας να είναι 4000K αντί για 3000K.
 Δυνατότητα επιλογής μεταξύ Opal ή Κυψέλης, αλλάζοντας το **O** (OPAL) σε **MP** (HONEYCOMB), σύμφωνα με την επιθυμία σας.
 Δυνατότητα επιλογής μετασχηματιστή Triac ή Dalí, αλλάζοντας το **OF** (ON/OFF) σε **T** (TRIAC) ή **D** (DALI), σύμφωνα με την επιλογή σας.
 Δυνατότητα επιλογής χρώματος, αλλάζοντας το **BL** (Μαύρο) σε **WH** (Άσπρο), **GR** (Γκρι) ή **SR** (Special Ral).


Επεξήγηση Τιμοκαταλόγων

Για Κυψέλη από μήκος 059-115 επιπλέον 6€ στην τιμή καταλόγου, από μήκος 143-227 επιπλέον 12€, από μήκος 255-339 επιπλέον 18€ και από μήκος 367-451 επιπλέον 24€ στην τιμή καταλόγου. Για τους μετασχηματιστές οι τιμές βρίσκονται στη λίστα παραπάνω. Για Special Ral επιπλέον 10% στην τιμή καταλόγου.


Για να δημιουργήσετε τον προσωπικό σας κωδικό μπορείτε να επισκεφτείτε το site μας www.masterlighting.gr ή μπορείτε να πάτε στην προηγούμενη σελίδα...

Η τιμή καταλόγου καθώς και ο κωδικός 77-XXXX-XXX διαφέρει ανάλογα με τις επιλογές σας. Περιλαμβάνονται όλα τα εξαρτήματα ανάρτησης.

Profile - Trimless MP61.56-MP44.56

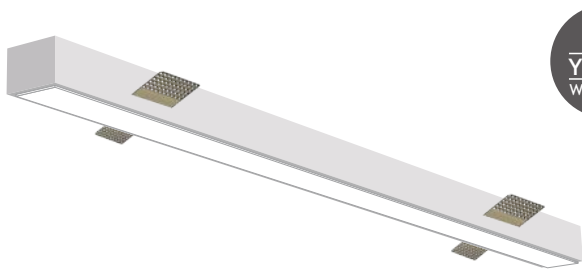

MP61.56 Trimless

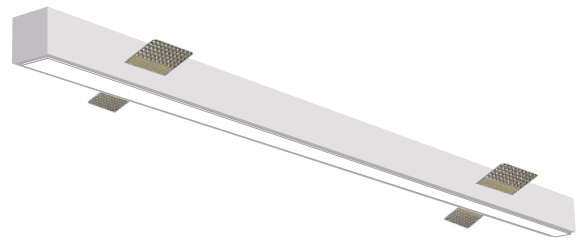

MP44.56 Trimless



MP61.56 - MP44.56 Trimless

Is a led profile luminaire, body of aluminum, painted with electrostatic paint with a matte finish. Designed for trimless mounting, providing direct light through an opal diffuser or honeycomb. Luminaire equipped with the best quality Samsung led chips 200Lm/W and KGP drivers.

MP61.56 - MP44.56 Trimless


Είναι φωτιστικό προφίλ led, σώμα από αλουμίνιο, βαμμένο με ηλεκτροστατική βαφή με ματ φινίρισμα. Σχεδιασμένο για τοποθέτηση trimless, παρέχοντας άμεσο φωτισμό μέσω της opal διάχυσης ή κηρήθρας. Φωτιστικό εξοπλισμένο με την καλύτερη ποιότητα. Προγράμματα οδήγησης Samsung led chips 200Lm/W και KGP.

Main Features


● Black ● White ● Grey ● Special Ral

All the trimless metal safety accessories are included.

Trimless



Aluminium Caps Included

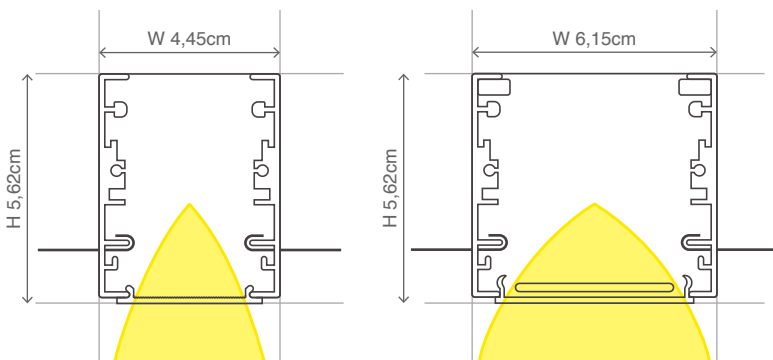

Characteristics and Advantages

- Available from 59cm to 451cm
- Opal diffuser UGR<22 or Honeycomb UGR<15
- Beam Angle (Opal 120°, Honeycomb 30°)
- Three types of driver (ON-OFF, DALI, TRIAC with the ability TUYA)
- Coming in White, Black, Grey or optionally Special Ral
- Included 1,5m wire adjustable suspension. Request for 3m or 5m
- Low operating temperature due to excellent heat induction
- Excellent performance with low power consumption

Χαρακτηριστικά και Πλεονεκτήματα

- Διατίθεται από 59cm έως 451cm
- Διαχυτής Opal UGR<22 ή Κυψέλης UGR<15
- Γωνία δέσμης (Opal 120°, Κυψέλης 30°)
- Τρεις τύποι μετασχηματιστών (ON-OFF, DALI, TRIAC με δυνατότητα TUYA)
- Διατίθεται σε λευκό, μαύρο, γκρι ή προαιρετικά Special Ral
- Περιλαμβάνεται συρμάτινη ρυθμιζόμενη ανάρτηση 1,5m. Αίτημα για 3m ή 5m.
- Χαμηλή θερμοκρασία λειτουργίας λόγω εξαιρετικής επαγωγής θερμότητας
- Εξαιρετική απόδοση με χαμηλή κατανάλωση ενέργειας

MASTER PROFILES							
Length cm	Standart Watt			Length cm	High Watt		
	Watt	Lumen 3.000K	Lumen 4.000K		Watt	Lumen 3.000K	Lumen 4.000K
59	12,6	1880	1900	59	21,6	3100	3120
87	18,9	2820	2850	87	32,4	4650	4680
115	25,2	3760	3800	115	43,2	6200	6240
143	31,5	4700	4750	143	54	7750	7800
171	37,8	5640	5700	171	64,8	9300	9360
199	44,1	6580	6650	199	75,6	10850	10920
227	50,4	7520	7600	227	86,4	12400	12480
255	56,7	8460	8550	255	97,2	13950	14040
283	63	9400	9500	283	108	15500	15600
311	69,3	10340	10450	311	118,8	17050	17160
339	75,6	11280	11400	339	129,6	18600	18720
367	81,9	12220	12350	367	140,4	20150	20280
395	88,2	13160	13300	395	151,2	21700	21840
423	94,5	14100	14250	423	162	23250	23400
451	100,8	15040	15200	451	172,8	24800	24960




Build your own code:

Your Code: MP61.56
or MP44.56

Structure	Length	Watt Power	Kelvin	Optic Diffuser	Driver	Body Color
T	143	H	4	O	T	WH
Structure	Length	Watt Power	Kelvin	Optic Diffuser	Driver	Body Color

Example Code:

MP61.56T-143-H-4-O-T-WH



Opal Diffuser

Choose Technical Configurations

Structure	Length	Watt Power	Kelvin	Optic Diffuser	Driver	Body Color
T = Trimless	059 = 59 087 = 87 115 = 115 143 = 143 171 = 171 199 = 199 227 = 227 255 = 255 283 = 283 311 = 311 339 = 339 367 = 367 395 = 395 423 = 423 451 = 451	S = Standart H = High	3 = 3.000K 4 = 4.000K	O = Opal Diffuser MP = Honeycomb Diffuser	OF = ON-OFF D = Dali T = Triac	WH = White BL = Black GR = Grey SR = Special Ral





Honeycomb Diffuser



TUYA SWITCH
77-50498-40
Only with Triac Driver

*You can only choose from the choices above

MP61.56 Trimless

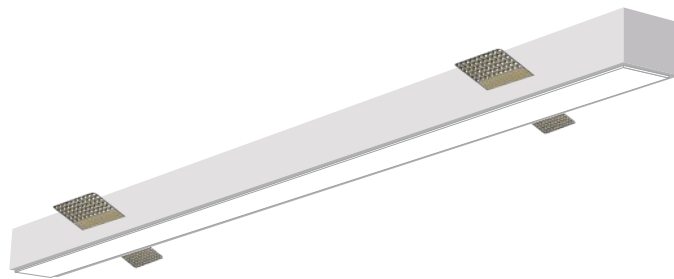

MP61.56 TRIMLESS WHITE

STANDART WATT

Length (cm)	Code On/off	Description Code	Watt	Lumen	On/off	Triac	Dali
59	77-39891-76	MP61.56T-059-S-3-O-OF-WH	12,6	1880	76	82	106
87	77-39987-86	MP61.56T-087-S-3-O-OF-WH	18,9	2820	86	92	118
115	77-40083-98	MP61.56T-115-S-3-O-OF-WH	25,2	3760	98	110	124
143	77-40179-116	MP61.56T-143-S-3-O-OF-WH	31,5	4700	116	128	152
171	77-40275-132	MP61.56T-171-S-3-O-OF-WH	37,8	5640	132	138	160
199	77-40371-142	MP61.56T-199-S-3-O-OF-WH	44,1	6580	142	160	174
227	77-40467-156	MP61.56T-227-S-3-O-OF-WH	50,4	7520	156	174	186
255	77-40563-172	MP61.56T-255-S-3-O-OF-WH	56,7	8460	172	190	210
283	77-40659-182	MP61.56T-283-S-3-O-OF-WH	63	9400	182	200	220
311	77-40755-196	MP61.56T-311-S-3-O-OF-WH	69,3	10340	196	220	236
339	77-40851-212	MP61.56T-339-S-3-O-OF-WH	75,6	11280	212	236	266
367	77-40947-222	MP61.56T-367-S-3-O-OF-WH	81,9	12220	222	246	278
395	77-41043-242	MP61.56T-395-S-3-O-OF-WH	88,2	13160	242	272	298
423	77-41139-248	MP61.56T-423-S-3-O-OF-WH	94,5	14100	248	278	314
451	77-41239-264	MP61.56T-451-S-3-O-OF-WH	100,8	15040	264	294	324

HIGH WATT

Length (cm)	Code On/off	Description Code	Watt	Lumen	On/off	Triac	Dali
59	77-39895-80	MP61.56T-059-H-3-O-OF-WH	21,6	3100	80	86	106
87	77-39991-94	MP61.56T-087-H-3-O-OF-WH	32,4	4650	94	106	118
115	77-40087-114	MP61.56T-115-H-3-O-OF-WH	43,2	6200	114	126	130
143	77-40183-128	MP61.56T-143-H-3-O-OF-WH	54	7750	128	146	148
171	77-40279-148	MP61.56T-171-H-3-O-OF-WH	64,8	9300	148	166	174
199	77-40375-160	MP61.56T-199-H-3-O-OF-WH	75,6	10850	160	184	184
227	77-40471-170	MP61.56T-227-H-3-O-OF-WH	86,4	12400	170	194	194
255	77-40567-188	MP61.56T-255-H-3-O-OF-WH	97,2	13950	188	218	240
283	77-40663-198	MP61.56T-283-H-3-O-OF-WH	108	15500	198	228	258
311	77-40759-214	MP61.56T-311-H-3-O-OF-WH	118,8	17050	214	250	276
339	77-40855-226	MP61.56T-339-H-3-O-OF-WH	129,6	18600	226	262	292
367	77-40951-260	MP61.56T-367-H-3-O-OF-WH	140,4	20150	260	302	306
395	77-41047-282	MP61.56T-395-H-3-O-OF-WH	151,2	21700	282	330	324
423	77-41143-292	MP61.56T-423-H-3-O-OF-WH	162	23250	292	340	338
451	77-41239-302	MP61.56T-451-H-3-O-OF-WH	172,8	24800	302	356	348

Ability to select Kelvin, changing the **3** (3000K) to **4** (4000K), if you wish your lighting to be 4000k than 3000k.
 Ability to select between Opal or Honeycomb, changing the **O** (OPAL) to **MP** (HONEYCOMB), according to your desire.
 Ability to select Driver Triac or Dali, changing the **OF** (ON/OFF) to **T** (TRIAC) or **D** (DALI), according to your desire of Driver.
 Ability to select Color, changing the **BL** (BLACK) to **WH** (WHITE), **GR** (GREY) or **SR** (SPECIAL RAL), according to your desire.

Price Catalogue Explanation



For Honeycomb from length 059-115 extra 6€ to the price catalogue, from 143-227 extra 12€, from 255-339 extra 18€ and from 367-451 extra 24€. For Drivers the prices are on the list. For Special Ral extra 10% to the price catalogue.

To build your personal code you can visit our site www.masterlighting.gr or you can go to the previous page....

The price catalogue as well as the code 77-XXXXX-XXX varies according to your options.

Included all the trimless accessories.

MP44.56 Trimless

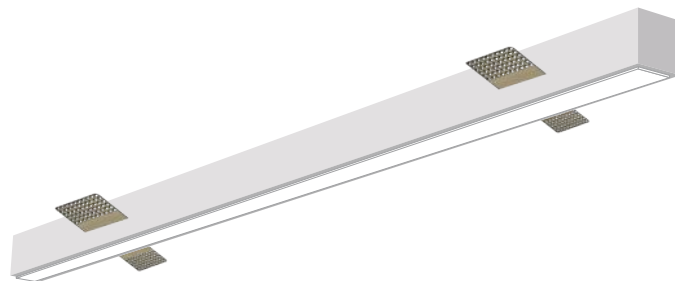

MP44.56 TRIMLESS WHITE

STANDART WATT

Length (cm)	Code On/off	Description Code	Watt	Lumen	On/off	Triac	Dali
59	77-41331-74	MP44.56T-059-S-3-O-OFF-WH	12,6	1880	74	80	104
87	77-41427-84	MP44.56T-087-S-3-O-OFF-WH	18,9	2820	84	90	116
115	77-41523-96	MP44.56T-115-S-3-O-OFF-WH	25,2	3760	96	108	122
143	77-41619-114	MP44.56T-143-S-3-O-OFF-WH	31,5	4700	114	126	142
171	77-41715-130	MP44.56T-171-S-3-O-OFF-WH	37,8	5640	130	136	158
199	77-41811-140	MP44.56T-199-S-3-O-OFF-WH	44,1	6580	140	158	172
227	77-41907-154	MP44.56T-227-S-3-O-OFF-WH	50,4	7520	154	172	184
255	77-42003-170	MP44.56T-255-S-3-O-OFF-WH	56,7	8460	170	188	208
283	77-42099-180	MP44.56T-283-S-3-O-OFF-WH	63	9400	180	198	218
311	77-42195-194	MP44.56T-311-S-3-O-OFF-WH	69,3	10340	194	218	234
339	77-42291-210	MP44.56T-339-S-3-O-OFF-WH	75,6	11280	210	234	264
367	77-42387-220	MP44.56T-367-S-3-O-OFF-WH	81,9	12220	220	244	276
395	77-42483-240	MP44.56T-395-S-3-O-OFF-WH	88,2	13160	240	270	296
423	77-42579-246	MP44.56T-423-S-3-O-OFF-WH	94,5	14100	246	276	312
451	77-42675-262	MP44.56T-451-S-3-O-OFF-WH	100,8	15040	262	292	322

HIGH WATT

Length (cm)	Code On/off	Description Code	Watt	Lumen	On/off	Triac	Dali
59	77-41335-78	MP44.56T-059-H-3-O-OFF-WH	21,6	3100	78	84	88
87	77-41431-92	MP44.56T-087-H-3-O-OFF-WH	32,4	4650	92	104	100
115	77-41527-112	MP44.56T-115-H-3-O-OFF-WH	43,2	6200	112	124	112
143	77-41623-124	MP44.56T-143-H-3-O-OFF-WH	54	7750	124	144	122
171	77-41719-146	MP44.56T-171-H-3-O-OFF-WH	64,8	9300	146	164	148
199	77-41815-158	MP44.56T-199-H-3-O-OFF-WH	75,6	10850	158	182	158
227	77-41911-168	MP44.56T-227-H-3-O-OFF-WH	86,4	12400	168	192	168
255	77-42007-186	MP44.56T-255-H-3-O-OFF-WH	97,2	13950	186	216	206
283	77-42103-196	MP44.56T-283-H-3-O-OFF-WH	108	15500	196	226	224
311	77-42199-212	MP44.56T-311-H-3-O-OFF-WH	118,8	17050	212	216	242
339	77-42295-224	MP44.56T-339-H-3-O-OFF-WH	129,6	18600	224	228	258
367	77-42391-260	MP44.56T-367-H-3-O-OFF-WH	140,4	20150	260	268	272
395	77-42487-280	MP44.56T-395-H-3-O-OFF-WH	151,2	21700	280	288	282
423	77-42583-290	MP44.56T-423-H-3-O-OFF-WH	162	23250	290	298	296
451	77-42679-300	MP44.56T-451-H-3-O-OFF-WH	172,8	24800	300	314	306

Δυνατότητα επιλογής Kelvin, αλλάζοντας το **3** (3000K) σε **4** (4000K), εάν επιθυμείτε ο φωτισμός σας να είναι 4000K αντί για 3000K.
 Δυνατότητα επιλογής μεταξύ Opal ή Κυψέλης, αλλάζοντας το **O** (OPAL) σε **MP** (HONEYCOMB), σύμφωνα με την επιθυμία σας.
 Δυνατότητα επιλογής μετασχηματιστή Triac ή Dali, αλλάζοντας το **OF** (ON/OFF) σε **T** (TRIAC) ή **D** (DALI), σύμφωνα με την επιλογή σας.
 Δυνατότητα επιλογής χρώματος, αλλάζοντας το **BL** (Μαύρο) σε **WH** (Άσπρο), **GR** (Γκρι) ή **SR** (Special Ral).


Επεξήγηση Τιμοκαταλόγων

Για Κυψέλη από μήκος 059-115 επιπλέον 6€ στην τιμή καταλόγου, από μήκος 143-227 επιπλέον 12€, από μήκος 255-339 επιπλέον 18€ και από μήκος 367-451 επιπλέον 24€ στην τιμή καταλόγου. Για τους μετασχηματιστές οι τιμές βρίσκονται στη λίστα παραπάνω. Για Special Ral επιπλέον 10% στην τιμή καταλόγου.

Για να δημιουργήσετε τον προσωπικό σας κωδικό μπορείτε να επισκεφτείτε το site μας www.masterlighting.gr ή μπορείτε να πάτε στην προηγούμενη σελίδα...

Η τιμή καταλόγου καθώς και ο κωδικός 77-XXXX-XXX διαφέρει ανάλογα με τις επιλογές σας. Περιλαμβάνονται όλα τα εξαρτήματα trimless.

Spotlights and Tracks

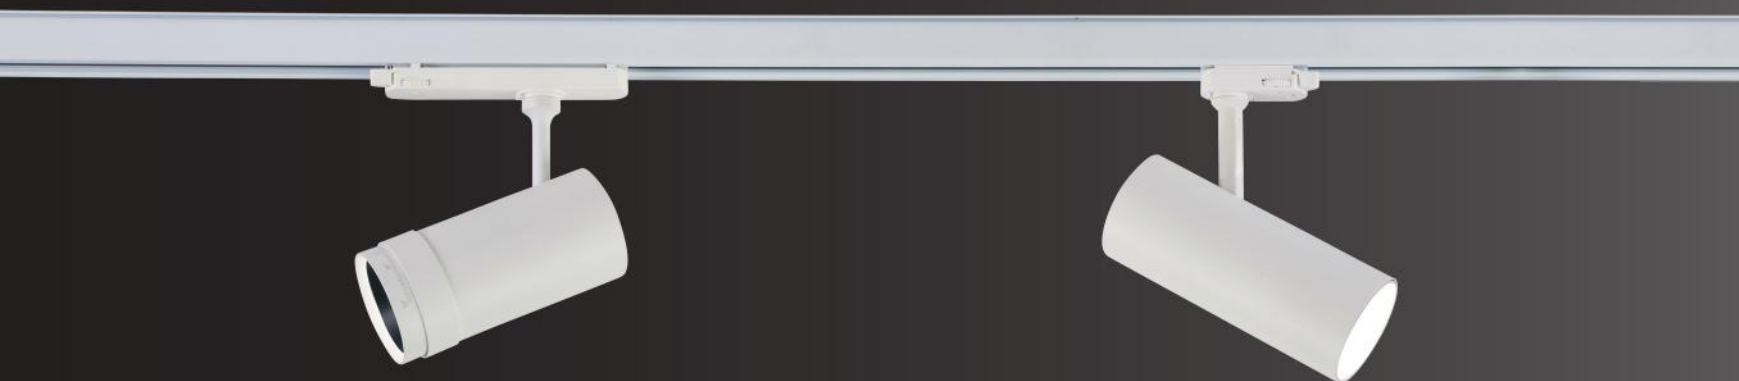



3 Phase





Zumo
77-9119-48.50



Zumo
77-9120-48.50

Zumo Led Track Light

Zumo Led Track Light Zoomable.
Black And White Aluminium Body

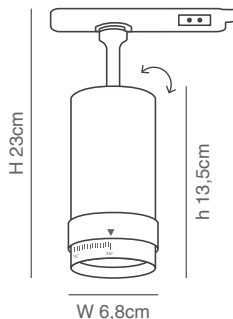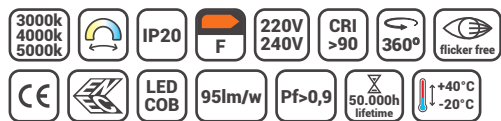

With The Ability To Select Power Between 8,4w - 18,9w

Pout (w)	Iout (mA)	In (A)	λ	1	2	3	4
8.4	200	0.10	0.75C	-	-	-	-
10.5	250	0.11	0.78C	-	-	-	ON
12.6	300	0.12	0.82C	-	-	ON	-
14.7	350	0.13	0.83C	-	-	ON	ON
16.8	400	0.14	0.85C	-	ON	-	-
18.9	450	0.15	0.87C	-	ON	-	ON



Photo	Code	Description	Dimensions	Watt	Volt	Lumen	CCT, Kelvin	CRI	IP	Beam Angle	Adjustable	Driver	Led Chip	Phase	Dim
	77-9119-48.50	Zoomable Black Aluminium	6,8x13,5x23cm	8,4-18,9W max	220-240V	798-1795Lm	3000k-4000k 5000k	>90	20	15°-55°	✓	KGP	Bridgelux	3Phase	-
	77-9120-48.50	Zoomable White Aluminium	6,8x13,5x23cm	8,4-18,9W max	220-240V	798-1795Lm	3000k-4000k 5000k	>90	20	15°-55°	✓	KGP	Bridgelux	3Phase	-



Accessories for Zumo




Fins
77-9127-10
Black



Fins
77-9128-10
White



Available with Dimmable Driver Triac for Zumo



77-9232-12
22W 220-240V



77-9233-12
22W 220-240V



3 Phase





Zumo
77-9117-64



Zumo
77-9118-64

Zumo Led Track Light

Zumo Led Track Light Zoomable.
Black And White Aluminium Body

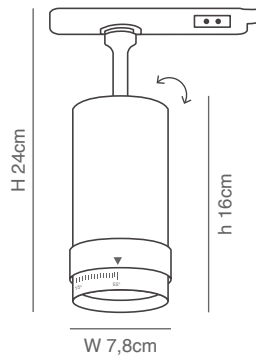

With The Ability To Select
Power Between 12,6w - 29,6w

Pout (w)	Iout (mA)	In (A)	λ	1	2	3	4
12.6	300	0.12	0.82C	-	-	ON	-
14.7	350	0.13	0.83C	-	-	ON	ON
16.8	400	0.14	0.85C	-	ON	-	-
18.9	450	0.15	0.87C	-	ON	-	ON
21	500	0.16	0.90C	-	ON	ON	-
23.1	550	0.17	0.92C	-	ON	ON	ON
25.2	600	0.18	0.95	ON	-	-	-
27.3	650	0.19		ON	-	-	ON
29.4	700	0.20		ON	-	ON	-


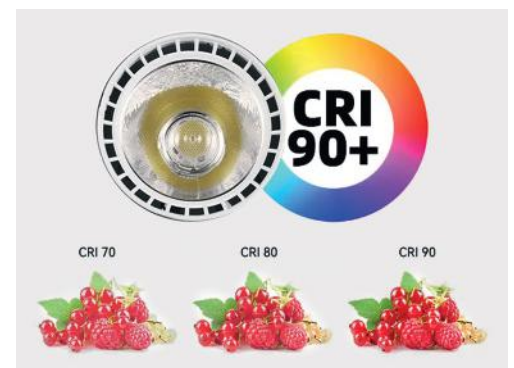


Photo	Code	Description	Dimensions	Watt	Volt	Lumen	CCT, Kelvin	CRI	IP	Beam Angle	Adjustable	Driver	Led Chip	Phase	Dim
	77-9117-64	Zoomable Black Aluminium	7,8x16x24cm	12,6-29,4W max	220-240V	1197-2793Lm	3000k-4000k-5000k	>90	20	15°-55°	✓	KGP	Bridgelux	3Phase	-
	77-9118-64	Zoomable White Aluminium	7,8x16x24cm	12,6-29,4W max	220-240V	1197-2793Lm	3000k-4000k-5000k	>90	20	15°-55°	✓	KGP	Bridgelux	3Phase	-



Accessories for Zumo

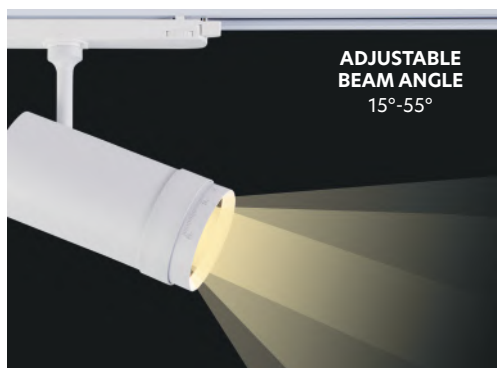


Fins
77-9125-10
Black



Fins
77-9126-10
White



Available with Dimmable Driver Triac for Zumo



77-9230-16
32W 220-240V




77-9231-16
32W 220-240V



3 Phase



Gozo
77-9123-37

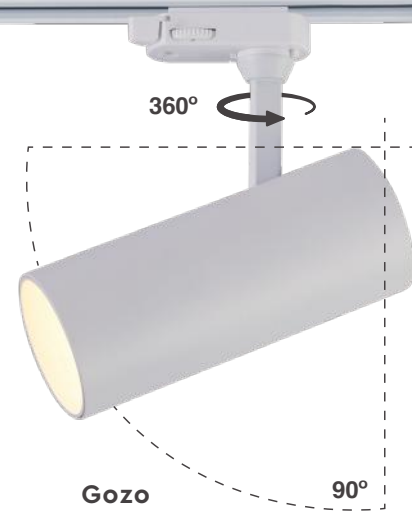

Gozo
77-9124-37

Gozo Led Track Light

Gozo Led Track Light
Black And White Aluminium Body



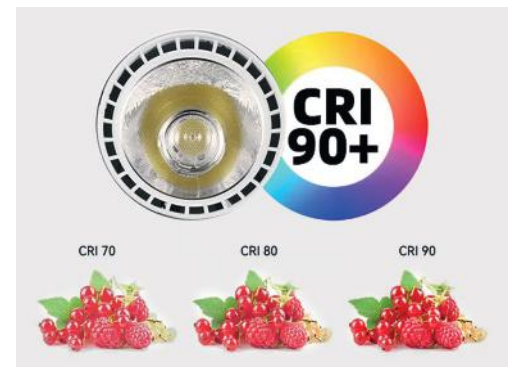


Photo	Code	Description	Dimensions	Watt	Volt	Lumen	CCT, Kelvin	CRI	IP	Beam Angle	Adjustable	URG	Driver	Led Chip	Phase	Dim
	77-9123-37	Spot Led Black Aluminium	6,6x15,7x22cm	18W	220-240V	1710 Lm	3000k-4000k-5000k	>90	20	24°	✓	<13	LIFUD	Bridgelux	3Phase	-
	77-9124-37	Spot Led White Aluminium	6,6x15,7x22cm	18W	220-240V	1710 Lm	3000k-4000k-5000k	>90	20	24°	✓	<13	LIFUD	Bridgelux	3Phase	-

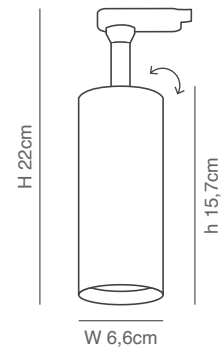

Accessories for Gozo

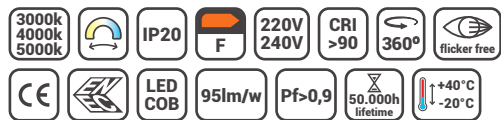

ADAPTOR 1PHASE BLACK

77-9138-1.50 ●



DOWN LIGHT BASE

77-9105-5.50 ● 77-9106-5.50 ●



CEILING ROSETTE 3PHASE

77-9107-8 ● 77-9108-8 ●



Available with Dimmable Driver Triac for Gozo



77-9232-12
22W 220-240V




77-9233-12
22W 220-240V



3 Phase



Gozo
77-9121-44

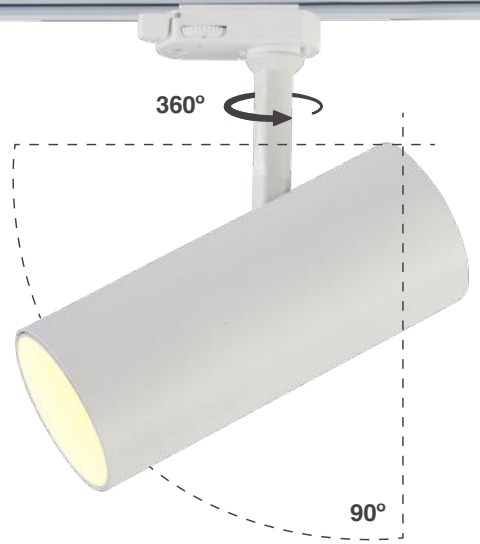

Gozo
77-9122-44

Gozo Led Track Light

Gozo Led Track Light
Black And White Aluminium Body

- 3000k
4000k
5000k
- IP20
- F
- 220V
240V
- CRI >90
- 360°
- flicker free
- CE
- LED COB
- 95lm/w
- Pf>0,9
- 50.000h lifetime
- +40°C
-20°C


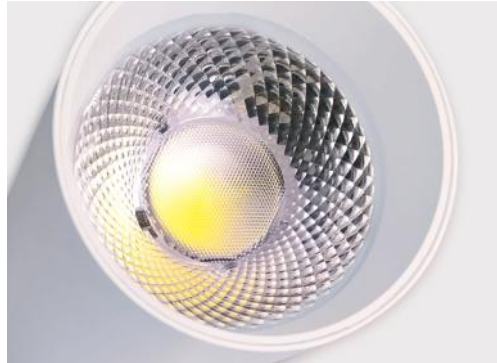


Photo	Code	Description	Dimensions	Watt	Volt	Lumen	CCT, Kelvin	CRI	IP	Beam Angle	Adjustable	URG	Driver	Led Chip	Phase	Dim
	77-9121-44	Spot Led Black Aluminium	7,6x18,2x24cm	30W	220-240V	2850 Lm	3000k-4000k-5000k	>90	20	36°	✓	<13	LIFUD	Bridgelux	3Phase	-
	77-9122-44	Spot Led White Aluminium	7,6x18,2x24cm	30W	220-240V	2850 Lm	3000k-4000k-5000k	>90	20	36°	✓	<13	LIFUD	Bridgelux	3Phase	-



Accessories for Gozo

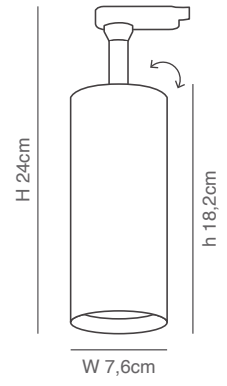

ADAPTOR 1PHASE BLACK

77-9138-1.50 ●



DOWN LIGHT BASE

77-9105-5.50 ● 77-9106-5.50 ●



CEILING ROSETTE 3PHASE

77-9107-8 ● 77-9108-8 ●



Available with Dimmable Driver Triac for Gozo



77-9230-16
32W 220-240V



77-9231-16
32W 220-240V



1 Phase




5
YEARS
WARRANTY

GU10

Barillo
77-9234-13

Barillo GU10 Track Light


Barillo GU10 Track Light for 1Phase Track
Black Aluminium Body

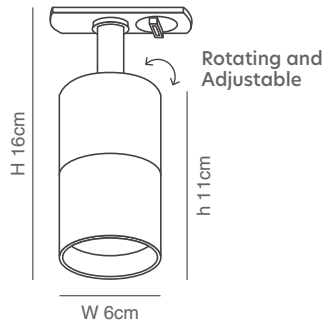

Suitable for Uno tracks

Ability to switch to 3phase
with adaptor 77-9109-6

EASY INSTALLATION BULB





Accessories for Barillo



ADAPTOR 3PHASE
77-9109-6 ●



DOWN LIGHT BASE
77-9105-5.50 ●



CEILING ROSETTE 3PHASE
77-9107-8 ●

Track Lights



PAR111



Paro
77-9266-14

PAR5.3



Mero
77-9268-9.50

PAR111




Paro
77-9267-14

Paro and Mero Track Light

Paro Track Light
Black and White Aluminium Body PAR111

Mero Track Light
Black Aluminium Body PAR5.3 GU10

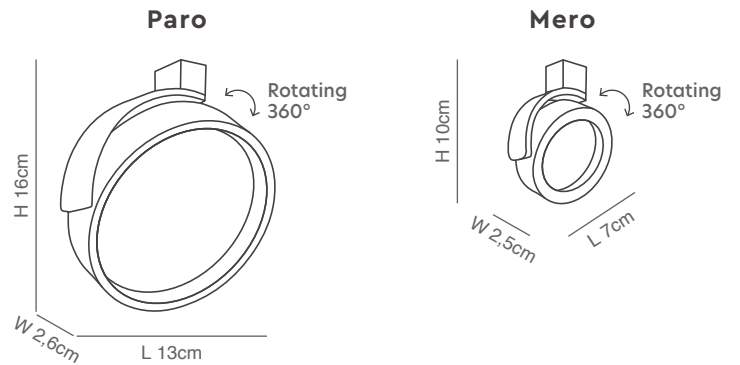



Accessories for Paro and Mero




ADAPTOR 1PHASE BLACK

77-9138-1.50 ●



ADAPTOR 3PHASE

77-9109-6 ● 77-9110-6 ●



DOWN LIGHT BASE

77-9105-5.50 ● 77-9106-5.50 ●




CEILING ROSETTE 3PHASE

77-9107-8 ● 77-9108-8 ●



Teatro Led Par111 For Paro

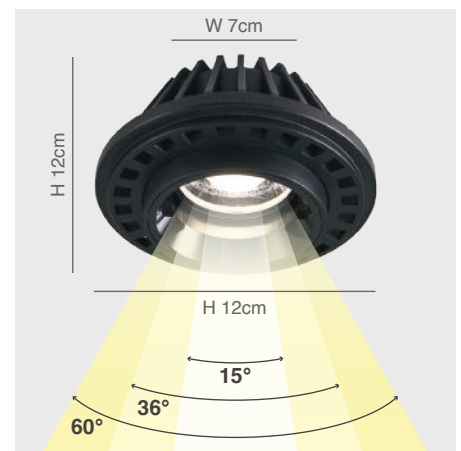

77-9272-24

Teatro Led Par111
Black Aluminium Body PAR111
Zoomable, 18W, 3CCT, With Switch



1 Phase

<<< Movable >>>

<<< Movable >>>



Pelota
77-9187-6



Dereto
77-9189-10

Pelota and Dereto Track Light

Pelota Led Track Light for 1Phase
Black Aluminium Body

Dereto Led Track Light for 1Phase
Black Aluminium Body



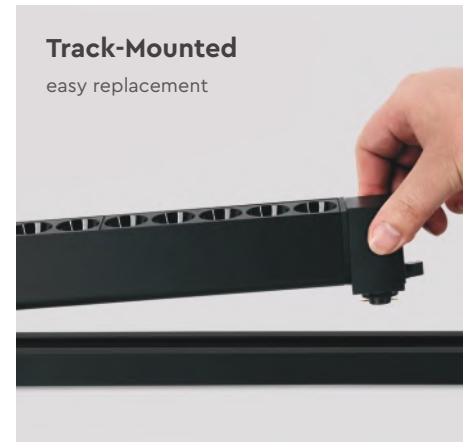



PHOTO	CODE	DESCRIPTION	DIMENTIONS	WATT	VOLT	CCT	CRI	IP	PHASE	ROTATING
	77-9187-6	Uno-TI-3bl Pelota Track Light Black	21x3,3x5,7cm	10w	220V 240V	3000k	>90	20	1Phase	✓
	77-9188-10	Uno-Tr4-3bl Dereto Track Light Black	47x3,3x5,7cm	30w	220V 240V	3000k	>90	20	1Phase	✓
	77-9189-10	Uno-TI4-4bl Dereto Track Light Black	47x3,3x5,7cm	30w	220V 240V	4000k	>90	20	1Phase	✓
	77-9190-12	Uno-Tr6-3bl Dereto Track Light Black	61x3,3x5,7cm	40w	220V 240V	3000k	>90	20	1Phase	✓
	77-9191-12	Uno-Tr6-4bl Dereto Track Light Black	61x3,3x5,7cm	40w	220V 240V	4000k	>90	20	1Phase	✓

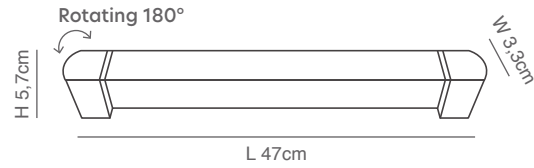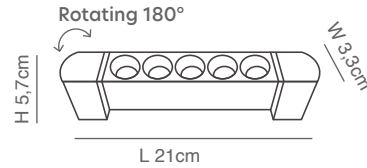

3 Phase - 4 Wires Tracks

Trio Tracks

Trio Track Rails 3Phase
Black and White Aluminium Body

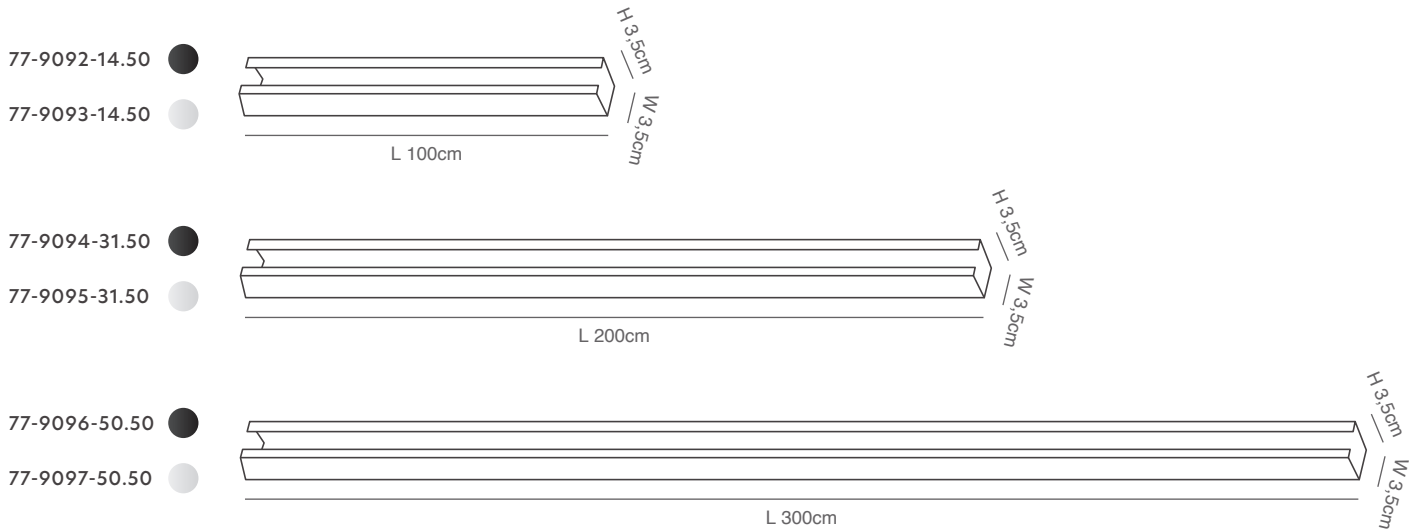

Trio Connectors

Trio Connectors 3Phase
Black and White Aluminium Body



77-9098-4
Trio Feeder Black



77-9099-4
Trio Feeder White




77-9100-0.5
Trio End Cap Black



77-9101-0.5
Trio End Cap White



77-9111-3
Trio Straight Connector Black

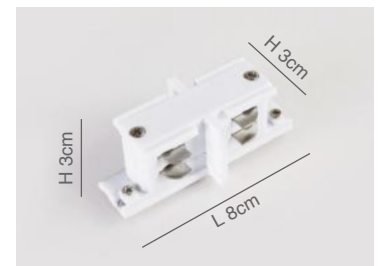


77-9112-3
Trio Straight Connector White



77-9113-9.50
Trio T Connector Black




77-9114-9.50
Trio T Connector White

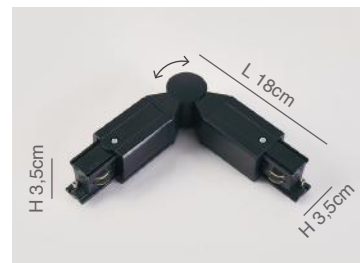

77-9115-15
Trio Adjustable Connector Black



77-9116-15
Trio Adjustable Connector White

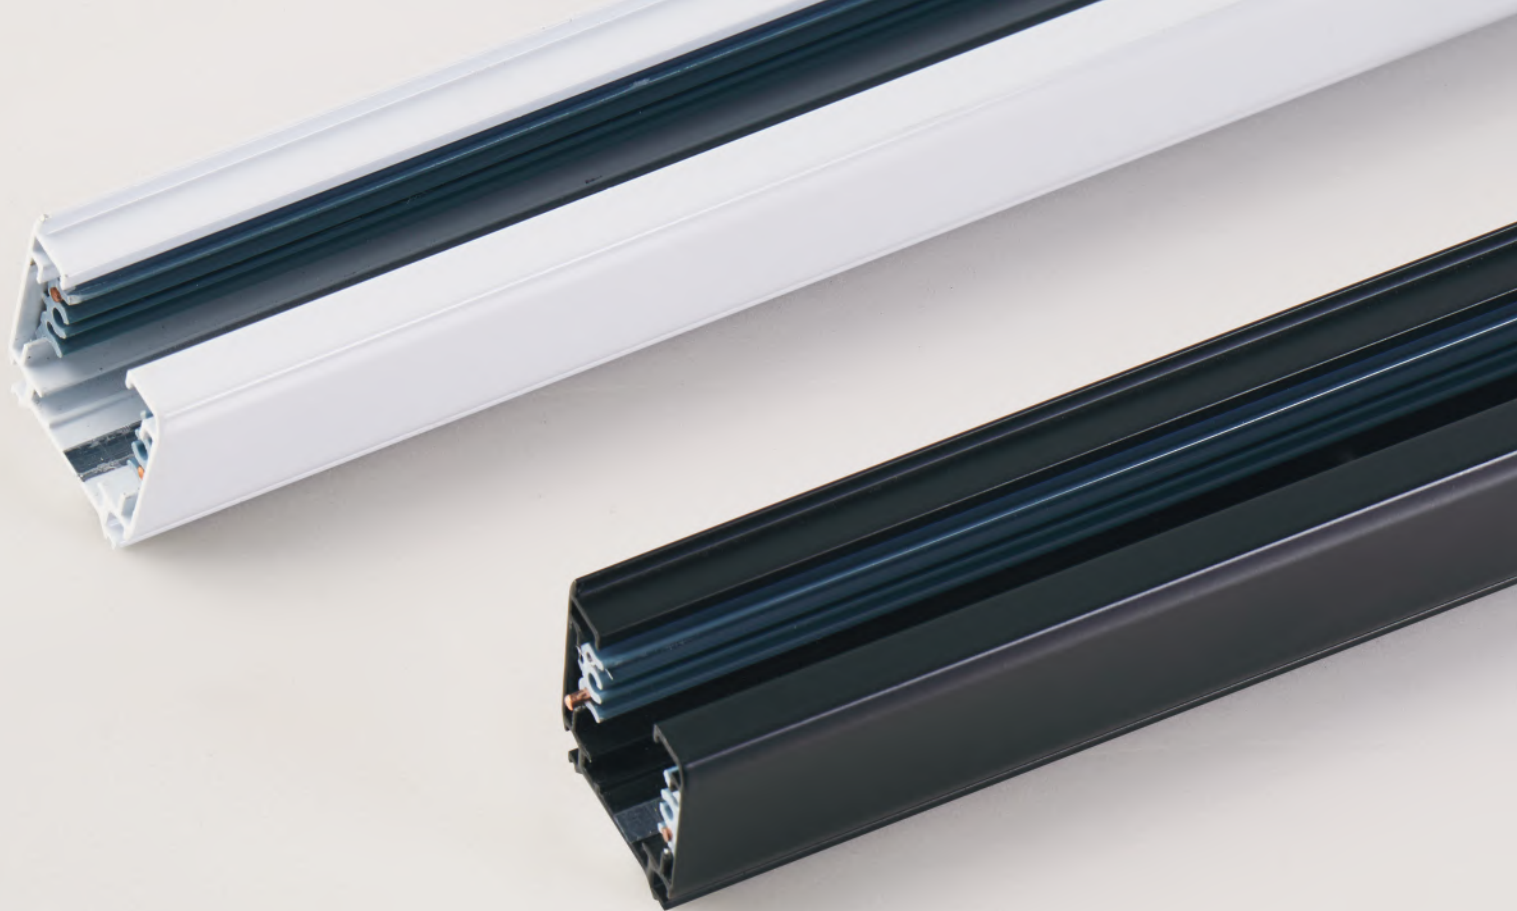

Trio Hanging Accessories


Trio Hanging Accessories 3Phase
Black and White Aluminium Body



77-9102-2.50
Trio Brackets Black




77-9103-2.50
Trio Brackets White

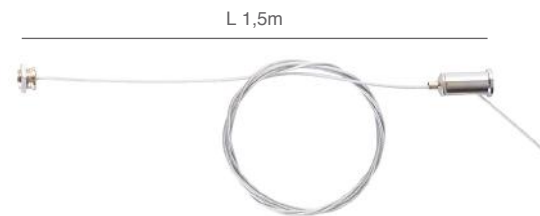

77-9104-1
Trio Wire Suspension

CREATE YOUR OWN SHAPE



EXAMPLES

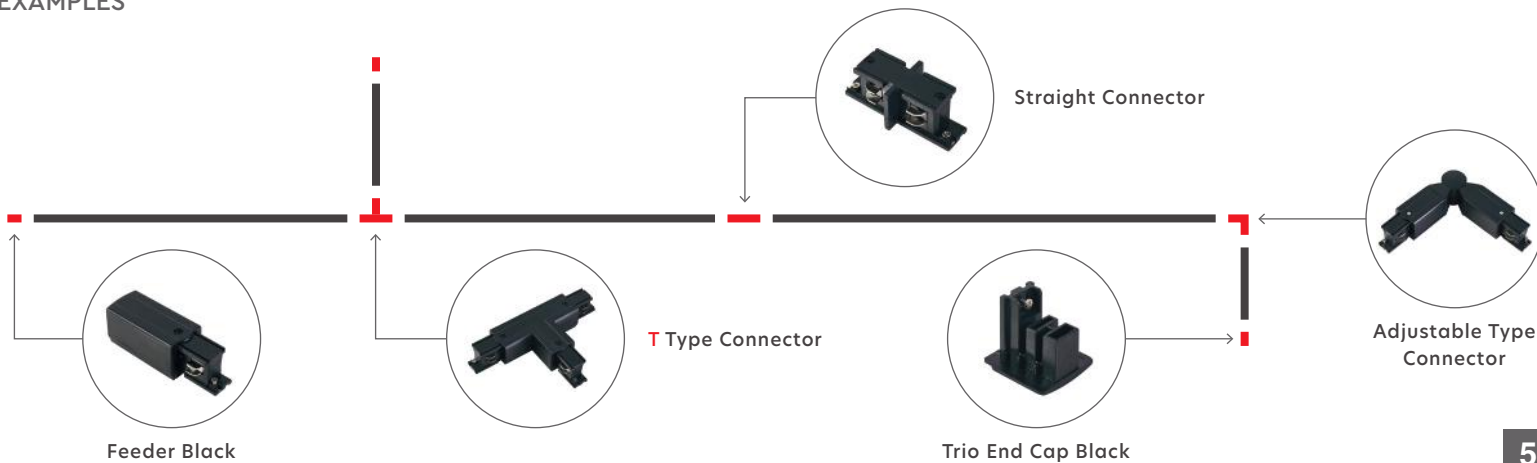

1 Phase - 2 Wires Tracks

Uno Tracks

Uno Track Rails 1Phase
Black Aluminium Body

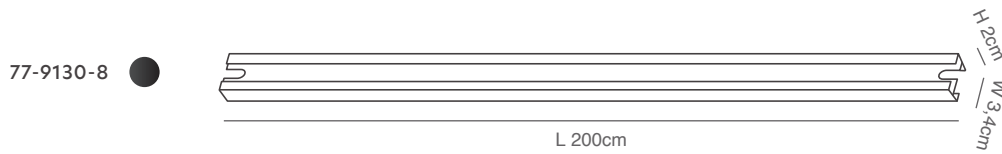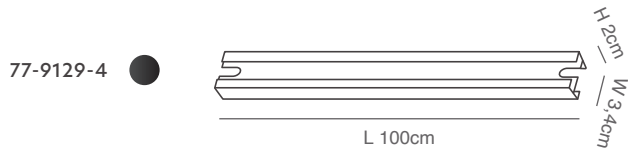


Uno Connectors


Uno Connectors 1Phase
Black Aluminium Body




77-9132-2
Uno Power Supply Cap

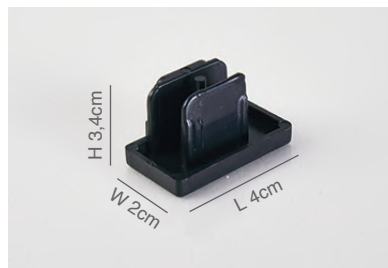


77-9133-0.3
Uno End Cap

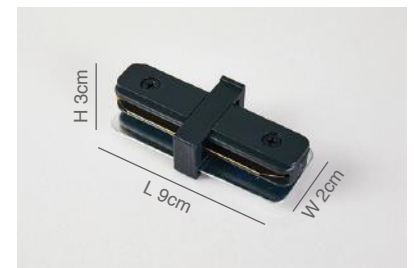


77-9134-2
Uno Straight Connector

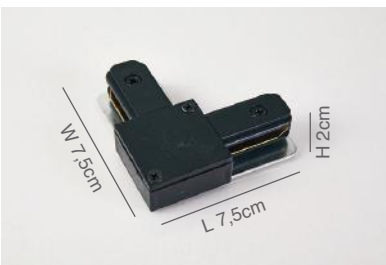

77-9135-2
Uno 90° Corner Connector

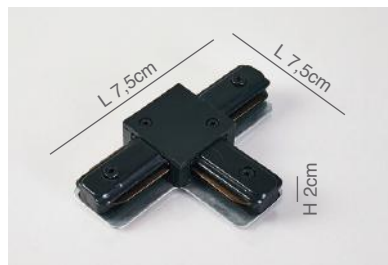

77-9136-2.50
Uno T Connector

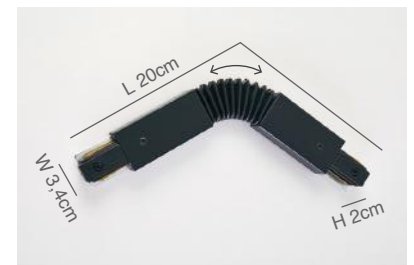

77-9137-8
Uno Flexible Connector




Hanging Accessories

Uno Hanging Accessories 1Phase
Black Aluminium Body




77-9102-2.50
Brackets Black

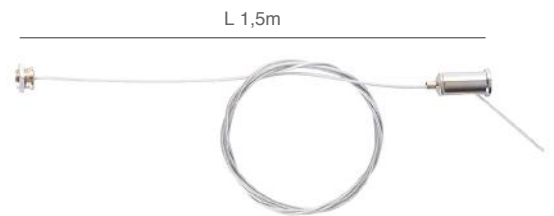

77-9104-1
Wire Suspension

CREATE YOUR OWN SHAPE

EXAMPLES

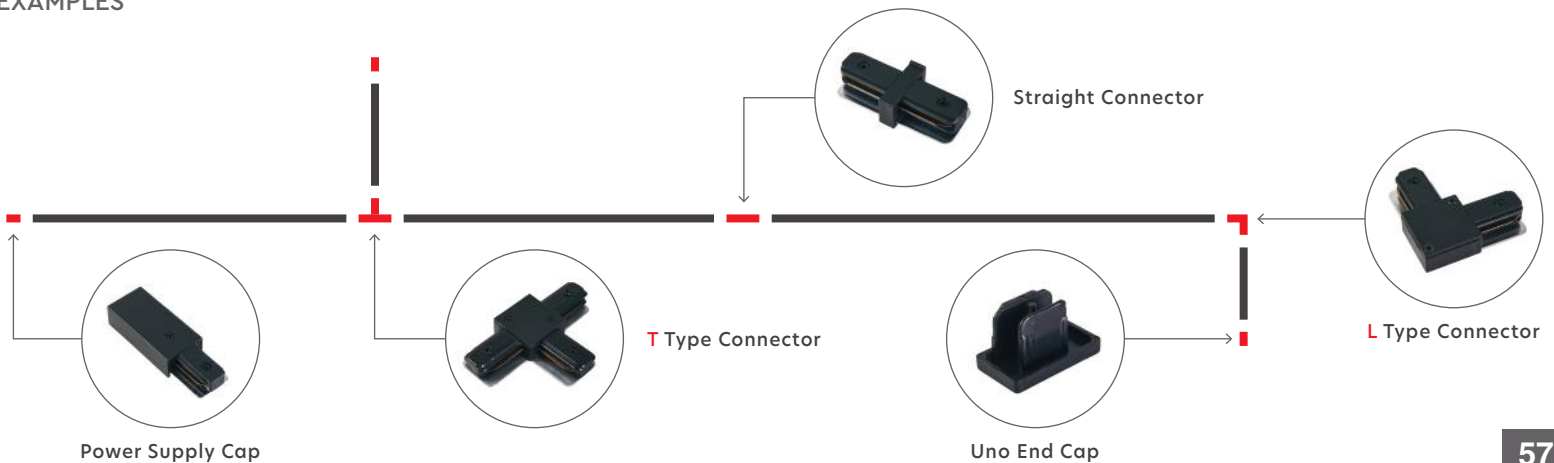

Magnetic Flex Series





The new era of Magnetic Track Lighting is here.

Enjoy all the professional lighting benefits without any pre-installation requirements and ceiling cuttings. Surface Mounted Magnetic Lighting System with Ultra Slim Design for maximum space utilization. Ideal for hotels, café-bars, stores and home usage. Smart App system is also available for individual brightness and Kelvin adjustment. Re-evaluate your lighting needs and customize your space decoration in the easiest way.




Magnetic Flex Track

Slim Surface Mounted Aluminum Black Rail
Male-Female Micro USB Connectors



Includes Micro USB Connectors



77-8989-16 L 30cm




77-8990-24 L 60cm



77-8991-33 L 120cm




Connectors Micro USB





77-8993-11
Four way female X connector



77-8992-8
Corner female L connector



77-8995-8
Male connector
Converting female to male

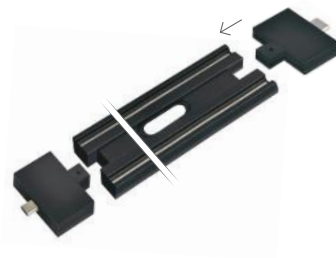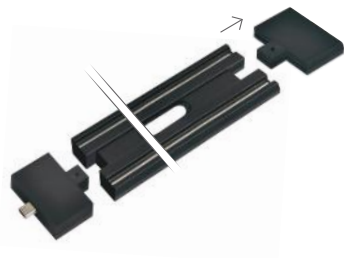


Magnetic Flex Driver

LED Surface Mountain Driver
100W AC220V to 48V
Includes Male-Female
Micro USB Connectors



77-8994-66

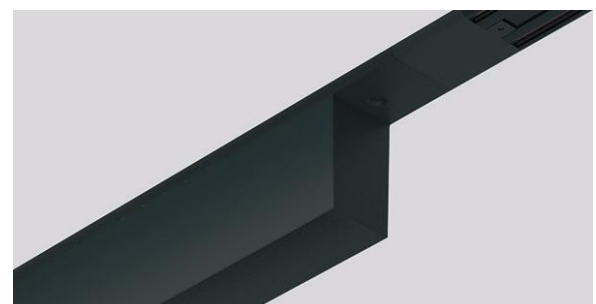





77-8975-36 L 30cm



77-8976-46 L 60cm



77-8977-65 L 115cm

Magnetic Flex Lightings

Surface Mounted Black Aluminum and PC Magnetic Lighting System




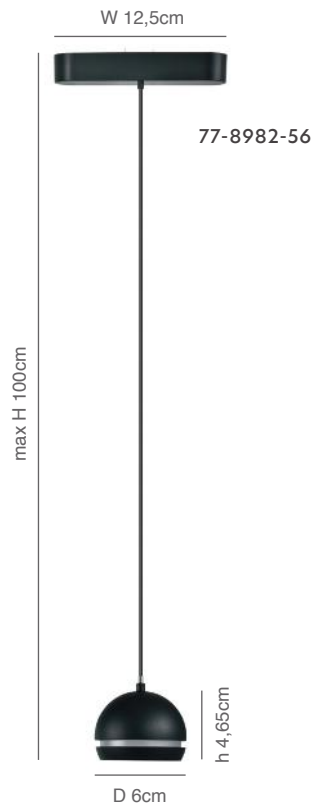


PHOTO	CODE	DESCRIPTION	WATT	VOLT	LUMEN	CCT	CRI	IP	BEAM ANGLE	DIM.	TUYA
	77-8975-36	Led Linear Light Black Aluminium 30x3cm	6W	48V	480Lm	3000k	>90	20	120	-	-
	77-8976-46	Led Linear Light Black Aluminium 60x3cm	8W	48V	960Lm	3000k	>90	20	120	-	-
	77-8977-65	Led Linear Light Black Aluminium 115x3cm	12W	48V	1600Lm	3000k	>90	20	120	-	-
	77-8981-96	Led Pendant Light Black Aluminium 100x8,5x7,4cm	8W	48V	640Lm	3000k	>90	20	36	-	-
	77-8982-56	Led Pendant Light Black Aluminium 100x6x4,65cm	6W	48V	480Lm	3000k	>90	20	110	-	-
	77-8980-48	Led Spot Lightblack Aluminium 18x12,5x14cm	12W	48V	960Lm	3000k	>90	20	36	-	-
	77-8978-34	Led Spot Lightblack Aluminium 13x3x6,5cm	8W	48V	640Lm	3000k	>90	20	36	-	-
	77-8979-39	Led Spot Light Black Aluminium 18x12,5x14cm	12W	48V	960Lm	3000k	>90	20	36	-	-

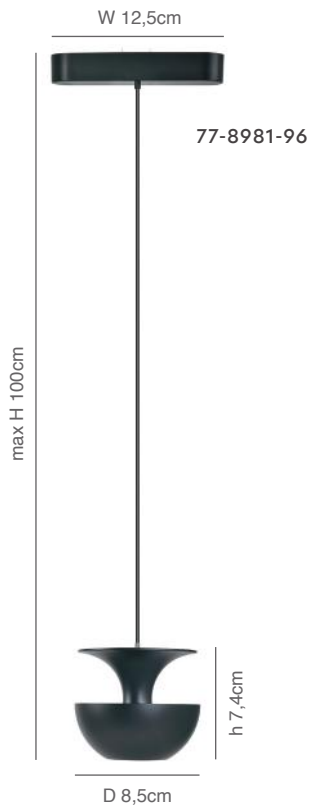

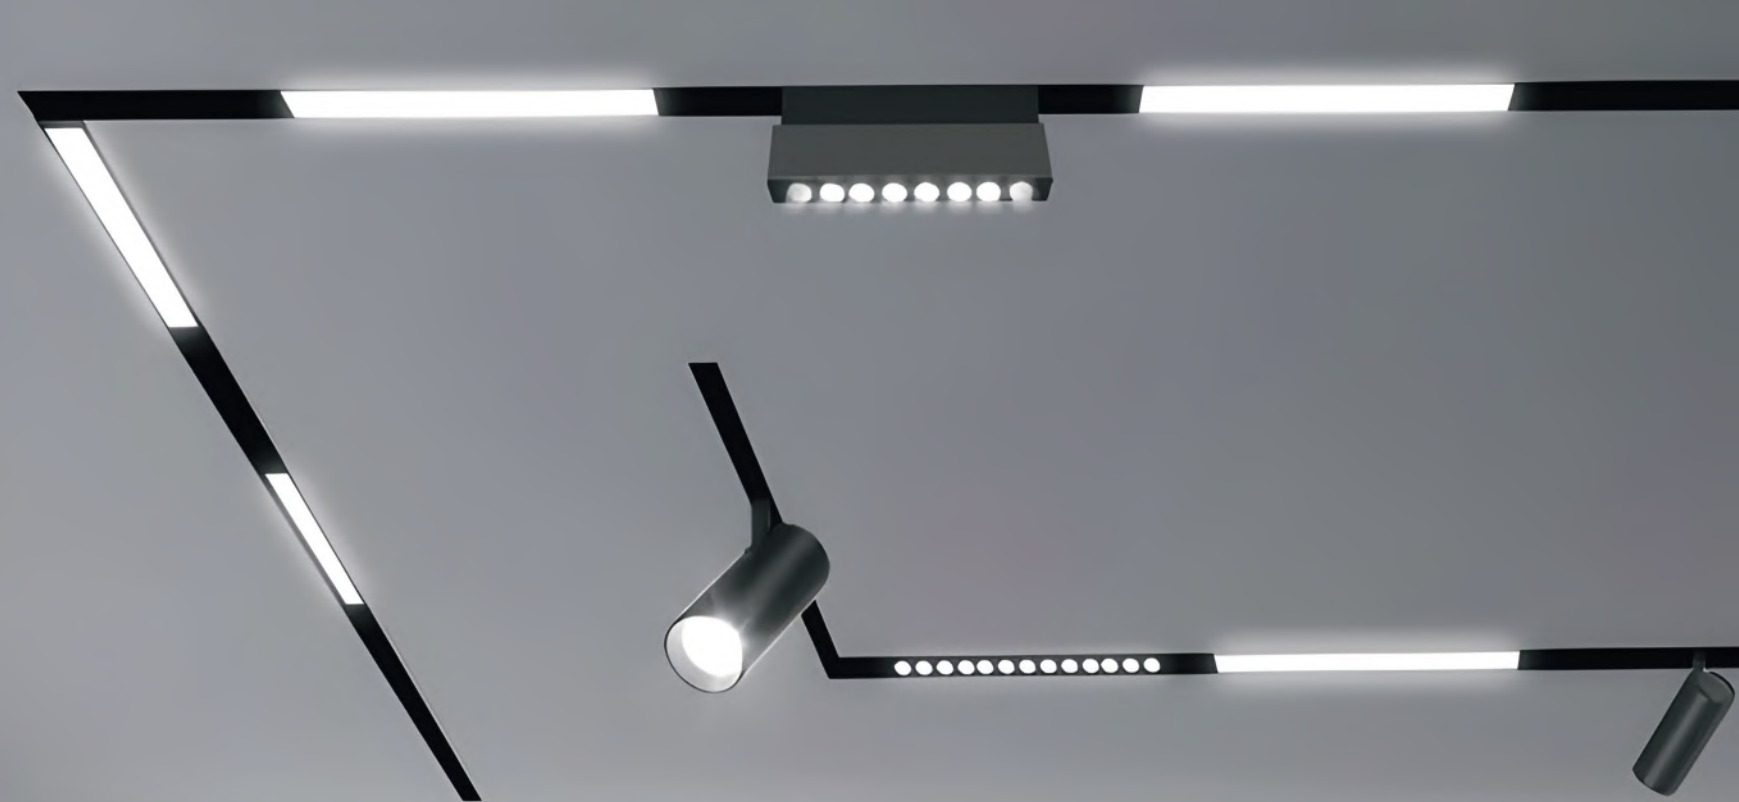

Independent lighting control

Easy connect
via app
voice control

2700k-6000k

tuya

Available on the **App Store**

ANDROID APP ON **Google Play**


Magnetic Flex Smart Lightings

Surface Mounted Black Aluminium and PC
Magnetic Lighting System




77-8983-84

L 60cm

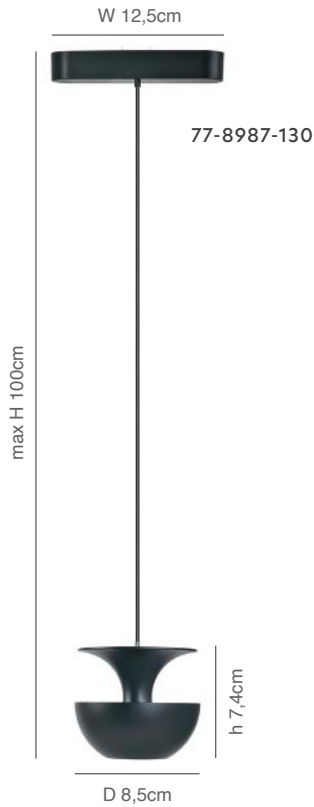

77-8987-130

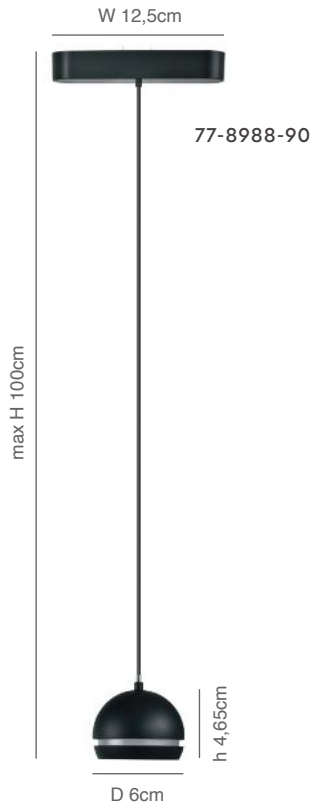

77-8988-90



77-8986-81



77-8984-68



77-8985-70

PHOTO	CODE	DESCRIPTION	WATT	VOLT	LUMEN	CCT	CRI	IP	BEAM ANGLE	DIM.	TUYA
	77-8983-84	Smart Led Linear Light Black Aluminium 60x3cm	12W	48V	960Lm	2700k-6000k	>90	20	120	✓	✓
	77-8987-130	Smart Led Pendant Light Black Aluminium 100x8,5x7,4cm	8W	48V	640Lm	2700k-6000k	>90	20	36	✓	✓
	77-8986-81	Smart Led Pendant Light Black Aluminium 100x6x4,65cm	6W	48V	480Lm	2700k-6000k	>90	20	110	✓	✓
	77-8984-68	Smart Led Spot Light Black Aluminium 18x12,5x14cm	12W	48V	960Lm	2700k-6000k	>90	20	36	✓	✓
	77-8982-56	Smart Led Spot Light Black Aluminium 13x3x6,5cm	8W	48V	640Lm	2700k-6000k	>90	20	36	✓	✓
	77-8985-70	Smart Led Spot Light Black Aluminium 18x12,5x14cm	12W	48V	960Lm	2700k-6000k	>90	20	36	✓	✓





Linear Slim Series





The Linear Slim series has just arrived.
An innovative atmospheric lighting for your space.
Linear led surface light with possibility of rotation,
as well as perspective to create any geometric shape you desire.



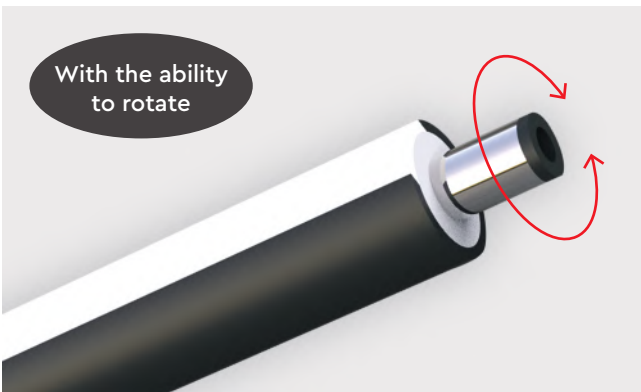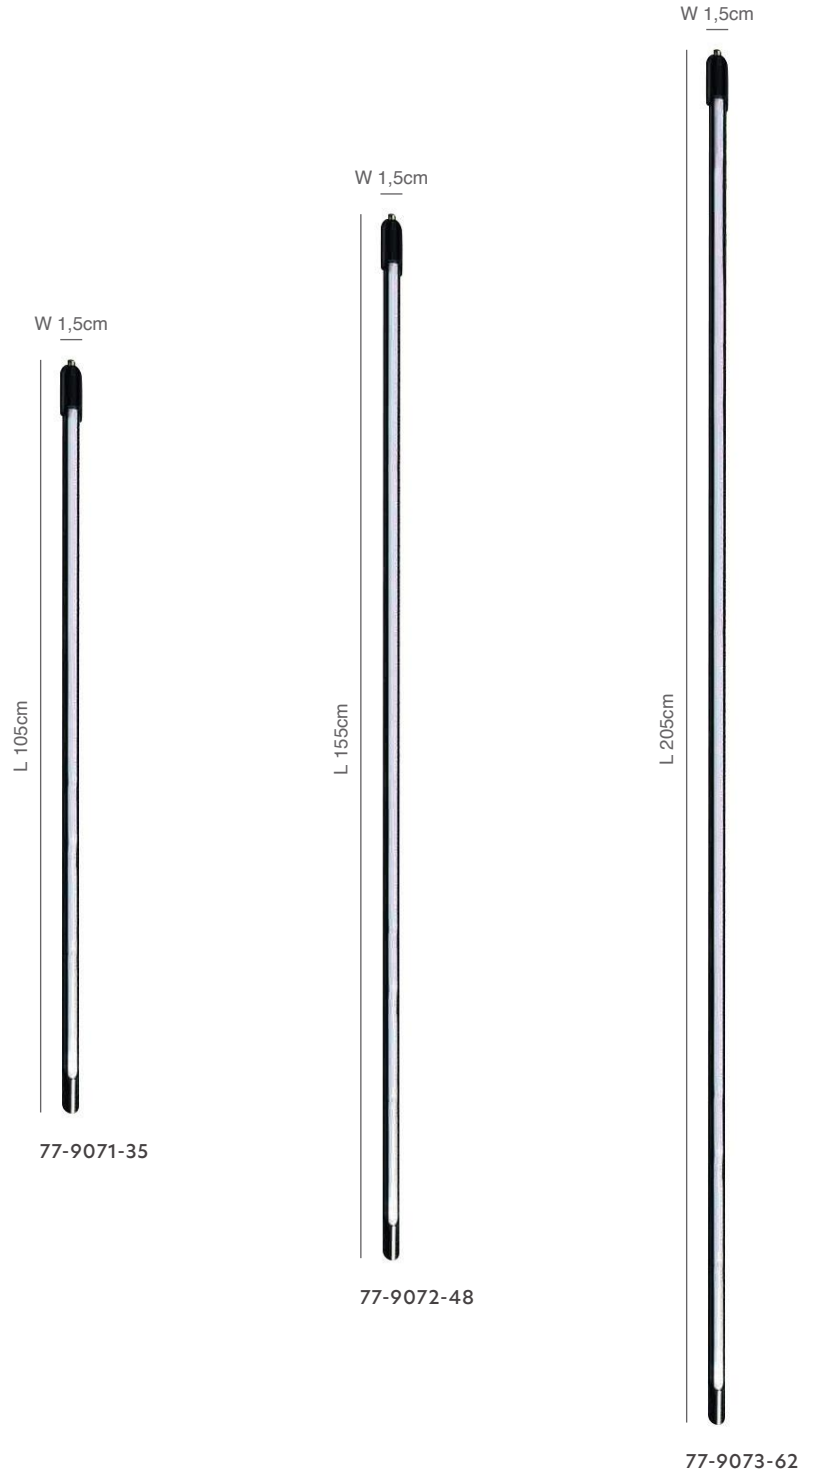


Linear Slim Lightings

Linear Slim Surface Mounted
Rotatable Aluminium Black



PHOTO	CODE	DESCRIPTION	WATT	VOLT	LUMEN	CCT	CRI	IP	BEAM ANGLE	DIM.	TUYA
	77-9071-35	SM-1050-10 Linear Slim Led Lighting All Black Aluminium 105x1,5cm	10W	24V	1050Lm	3000k	>90	44	120	✓	-
	77-9072-48	SM-1550-15 Linear Slim Led Lighting All Black Aluminium 155x1,5cm	15W	24V	1550Lm	3000k	>90	44	120	✓	-
	77-9073-62	SM-2050-20 Linear Slim Led Lighting All Black Aluminium 205x1,5cm	20W	24V	2100Lm	3000k	>90	44	120	✓	-

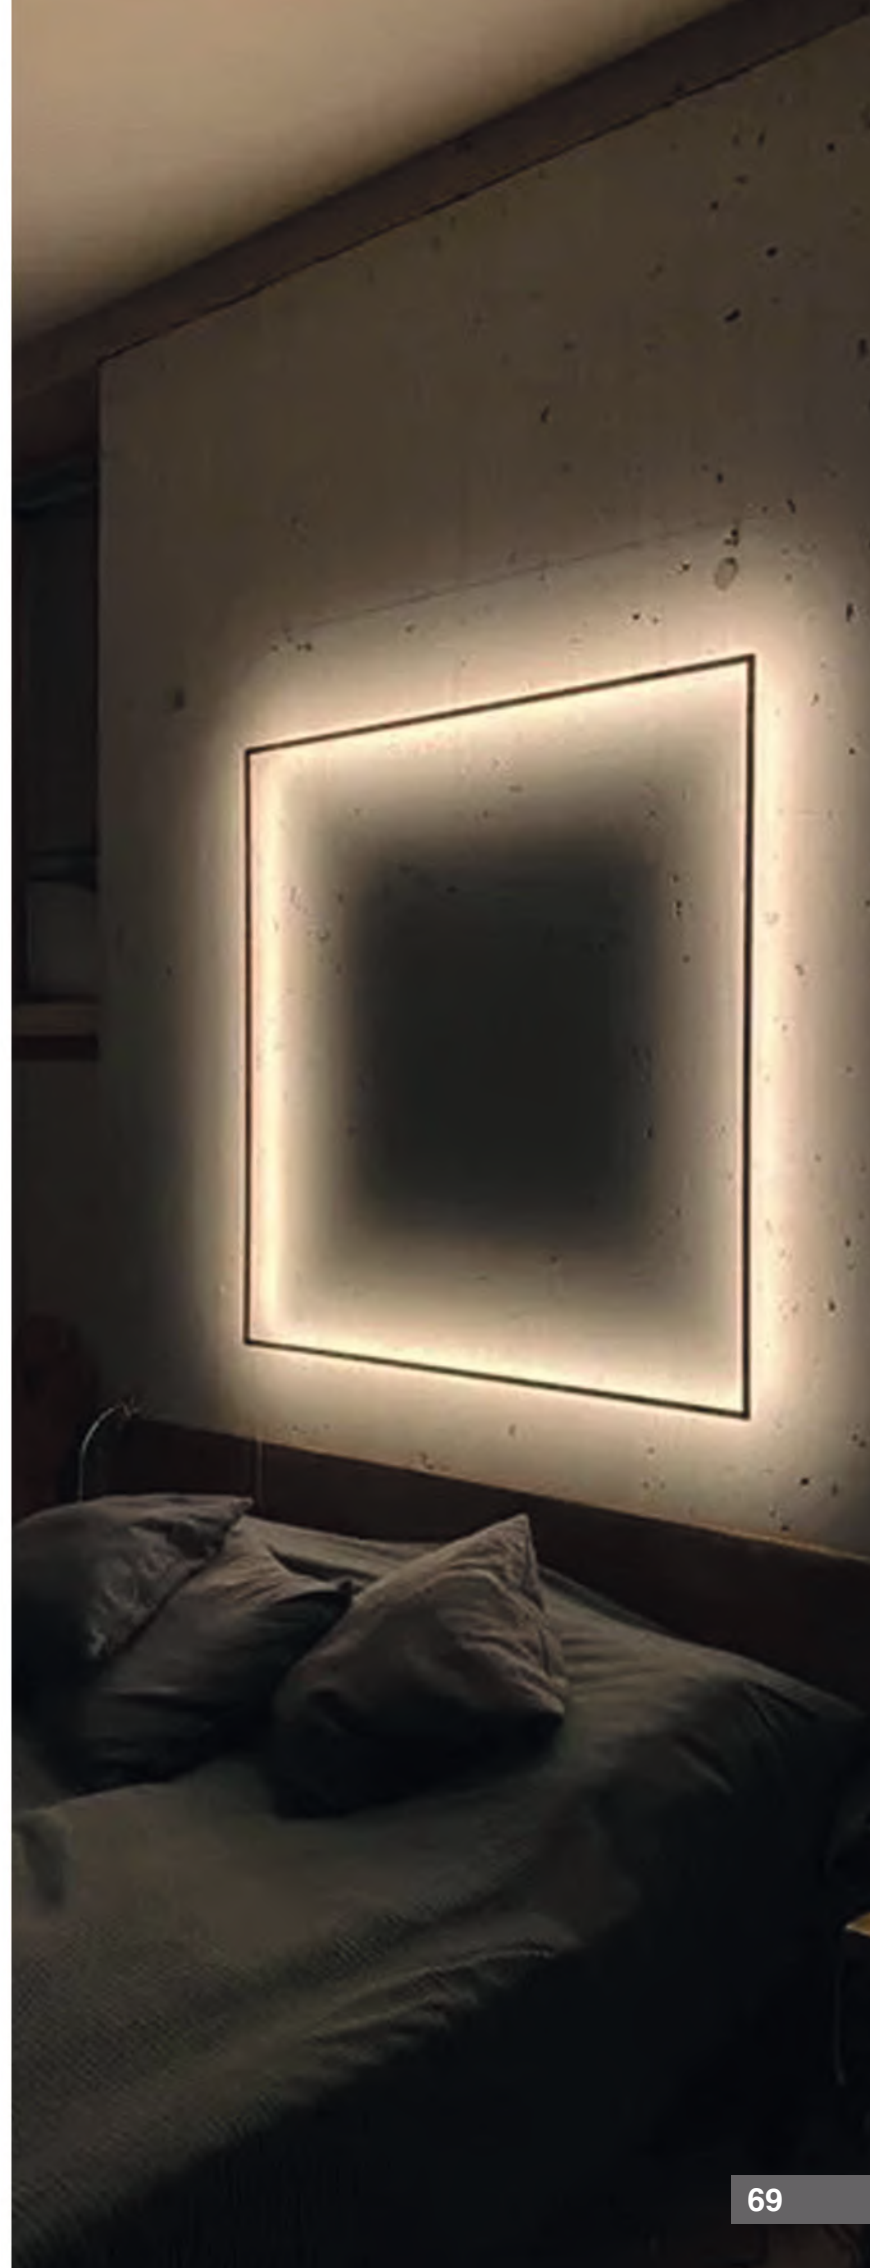

Linear Slim Accessories



77-9074-14
Male Head Input
Connector



77-9075-14
Female Head Input
Connector



77-9076-14
Cross Connector



77-9077-14
Upper and Lower
Wall Connector



77-9078-14
T-Shaped Downward
Connector



77-9079-14
T-Type Left Female
Connector



77-9080-14
Middle Connector



77-9081-14
L-Type Left Male
Connector

Linear Slim Drivers

Linear Slim Driver With Switch All Black Aluminium



You can choose any other Driver 24V



77-9082-85
60watt, 24V




77-9083-132
150watt, 24V




CREATE YOUR OWN SHAPE


EXAMPLES



77-9071-35 x4pcs
77-9079-14 x4pcs

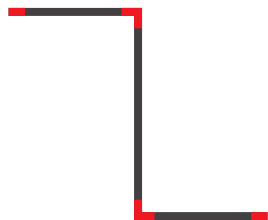



77-9071-35 x2pcs, 77-9073-62 x1pcs
77-9074-14 x1pcs, 77-9075-14 x1pcs
77-9079-14 x1pcs, 77-9081-14 x1pcs



77-9072-48 x3pcs
77-9078-14 x1pcs
77-9074-14 x2pcs
77-9075-14 x1pcs



77-9071-35 x3pcs, 77-9074-14 x1pcs
77-9079-14 x1pcs, 77-9075-14 x1pcs
77-9081-14 x1pcs, 77-9079-14 x1pcs

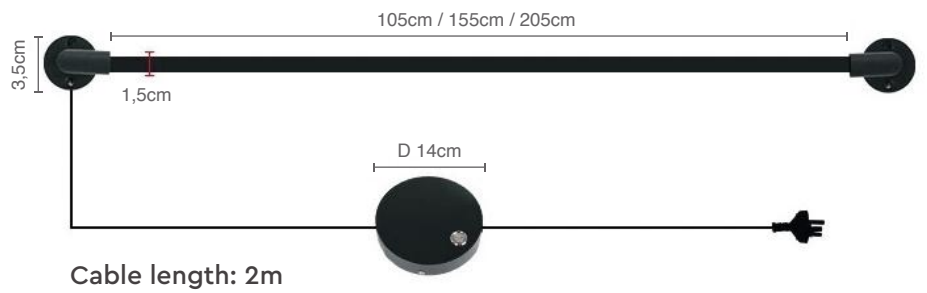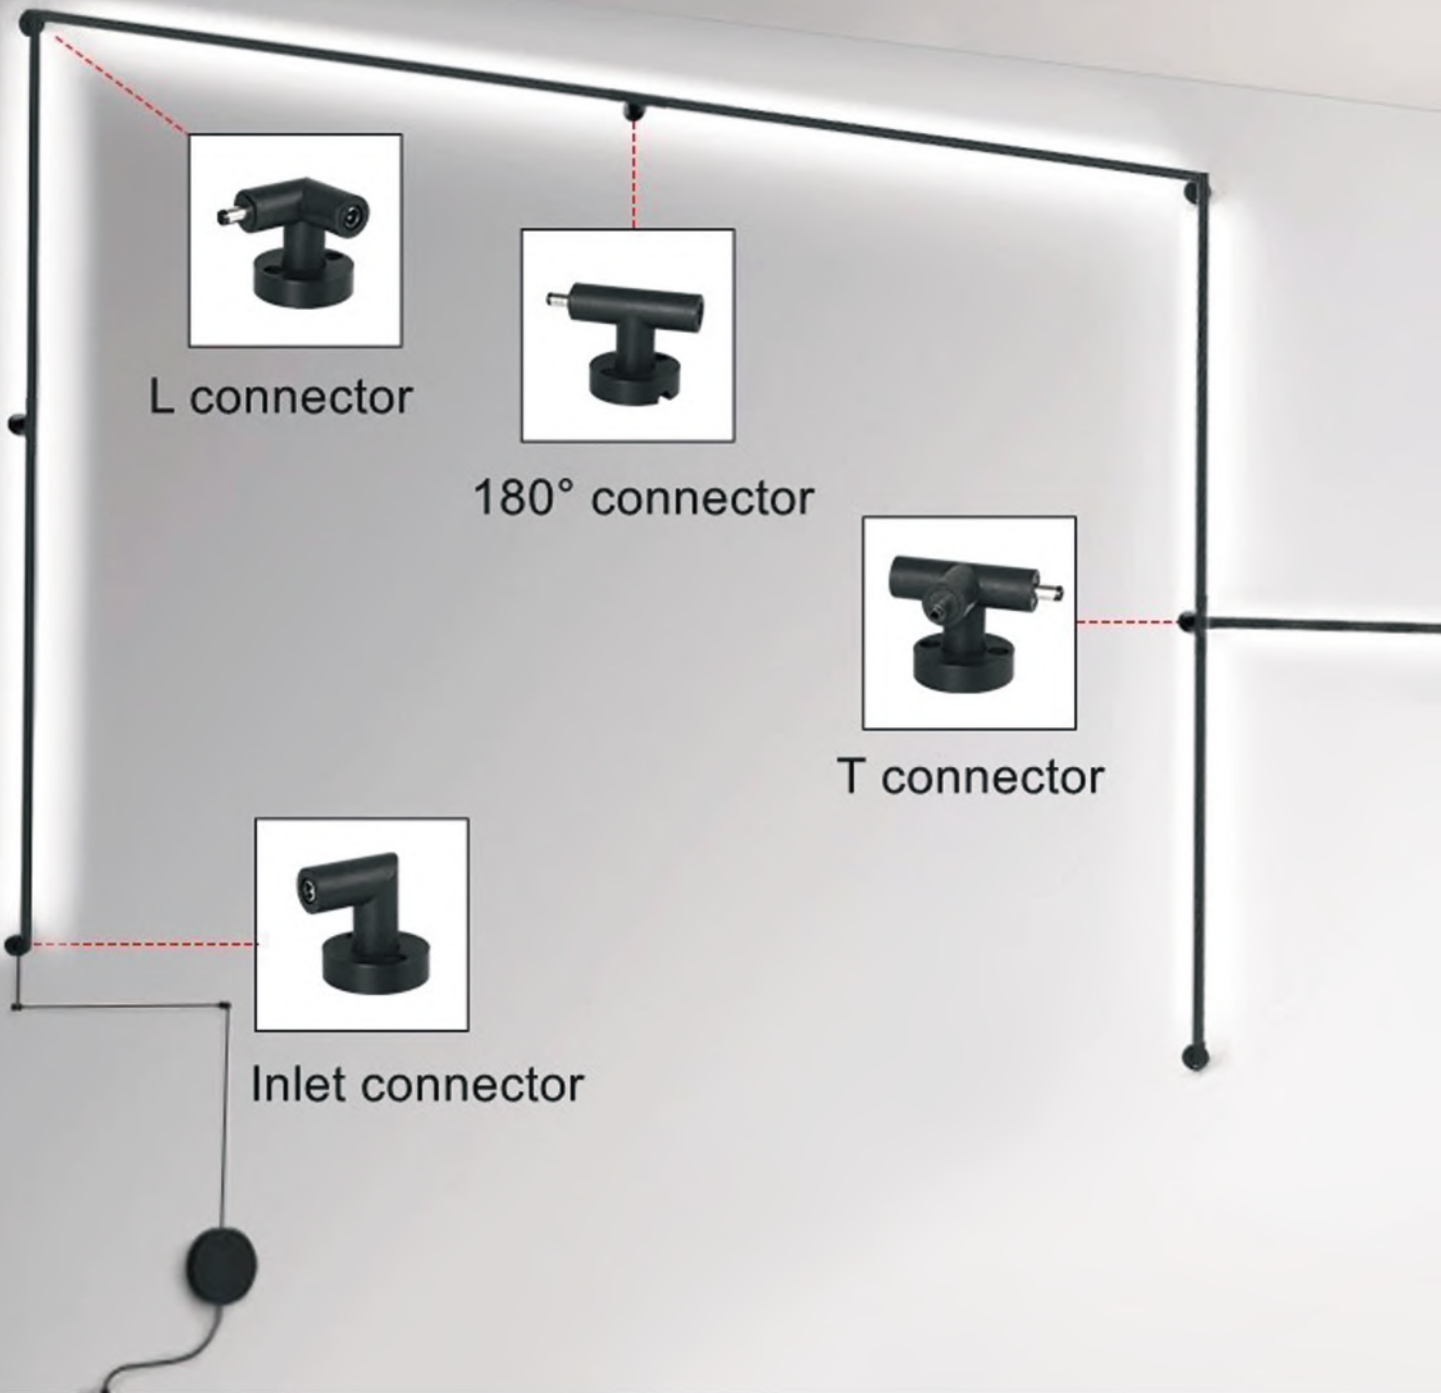

Downlight Recessed Or Ceiling Spots





Ceiling




Bali
77-9235-10




Bali
77-9236-10

Bali GU10 Ceiling Spotlight

Bali GU10 Ceiling Spotlight
Black and White Aluminium Body

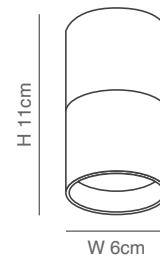

EASY INSTALLATION BULB







Cargo
77-9237-4

5
YEARS
WARRANTY


IP20




Cargo
77-9238-4

Cargo


Downlight Recessed Spot
Black and White Aluminium Body.




Cargo
Light Down
Led GU10 1x5Watt

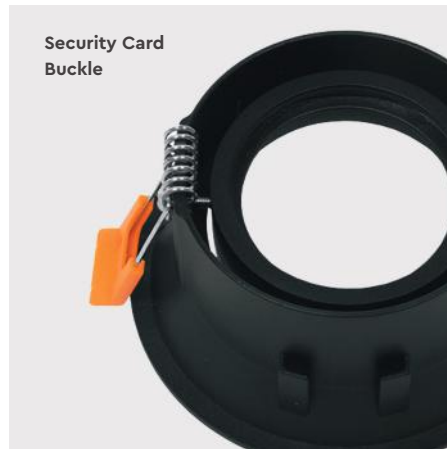


Easy Installation Bulb



Ring



GU10



Done



Customize Products

Create your own spotlight by combining the cielo with any inside cup depo.

5
YEARS
WARRANTY

IP20




CIELO 77-9239 +
DEPO 77-9241



CIELO 77-9239 +
DEPO 77-9242



CIELO 77-9239 +
DEPO 77-9245



CIELO 77-9239 +
DEPO 77-9243



CIELO 77-9239
+ DEPO 77-9244



CIELO 77-9240 +
DEPO 77-9242



CIELO 77-9240 +
DEPO 77-9241



CIELO 77-9240 +
DEPO 77-9245




CIELO 77-9240 +
DEPO 77-9243



CIELO 77-9240
+ DEPO 77-9244

Cielo

Downlight Recessed Spot
Black and White Aluminium Body.

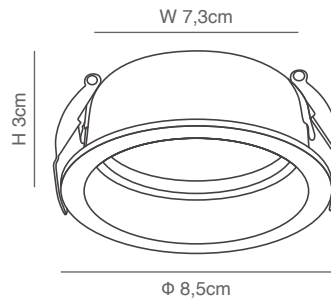

Cielo
Light Down
Led Gu10 1x5Watt
or COB 20Watt
3000k or 4000k

- Black
77-9239-4
- White
77-9240-4

Inside Cups Depo

Lighting Angle Can Be Adjusted 30°



Depo Black
77-9241-4



Depo White
77-9242-4



Depo Nickel
77-9243-5.50



Depo Gold
77-9243-5.50



Depo Copper
77-9244-5.50

Build In

First Step

Choose inside Cup Depo



Depo

Second Step

Choose COB or GU10



COB



GU10

Thirst Step

Choose the frame



Black




White

Complete





Anti Glare Shading Angle 30°

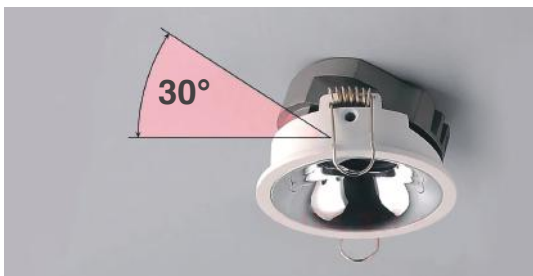

Lighting Angle Can Be Adjusted 30°


Adjustable Angle




Vertical

To the left

To the right

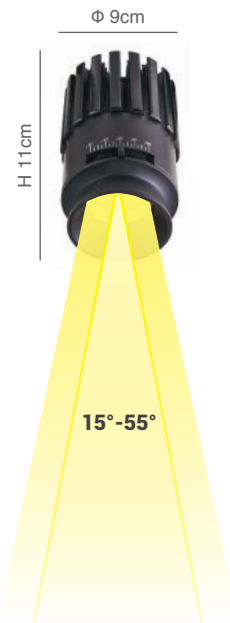

GUSTO
COB Zoomable
Led 20W, Black




77-9262-28
3000k

77-9263-28
4000k



KGP Triac Driver
77-50497-15
20Watt Dimmable
Un 220-240V
Uout max 55Vdc

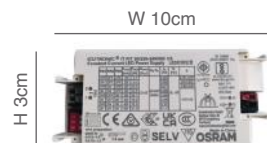

Osram Driver
77-50496-11.50
20Watt Non Dimmable
Un 220-240V
Uout max 42Vdc

Customize Products

Create your own spotlight by combining the cielo with any inside cup cannon.



CIELO 77-9239 +
CANNON 77-9246



CIELO 77-9239 +
CANNON 77-9247




CIELO 77-9240 +
CANNON 77-9246



CIELO 77-9240 +
CANNON 77-9247

Cielo

Downlight Recessed Spot
Black and White Aluminium Body.

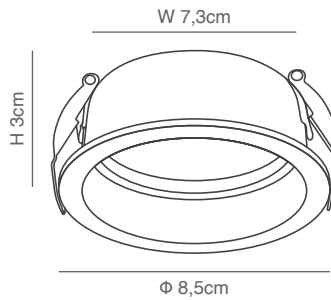

Cielo
Light Down
Led Gu10 1x5Watt
or COB 20Watt
3000k or 4000k

- Black
77-9239-4
- White
77-9240-4

Inside Cups Cannon

Lighting Angle Can Be Adjusted 30°



Cannon Black
77-9246-5



Cannon White
77-9247-5



Build In

First Step
Choose inside Cup Cannon



Cannon

Second Step
Choose COB or GU10



COB



GU10

Thirst Step
Choose the frame



Black



White

Complete





Lighting Angle Can Be Adjusted 30°


Adjustable Angle




Vertical

To the left

To the right

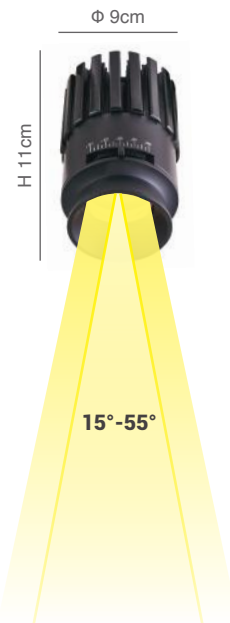

GUSTO
COB Zoomable
Led 20W, Black




77-9262-28
3000k

77-9263-28
4000k



KGP Triac Driver
77-50497-15
20Watt Dimmable
Un 220-240V
Uout max 55Vdc



Osram Driver
77-50496-11.50
20Watt Non Dimmable
Un 220-240V
Uout max 42Vdc

Customize Products

Create your own spotlight by combining the trixi with any inside cup depo.

5
YEARS
WARRANTY

IP20



TRIXI 77-9248 +
DEPO 77-9241



TRIXI 77-9248 +
DEPO 77-9242



TRIXI 77-9248 +
DEPO 77-9245



TRIXI 77-9248 +
DEPO 77-9243



TRIXI 77-9248 +
DEPO 77-9244



TRIXI 77-9249 +
DEPO 77-9242



TRIXI 77-9249 +
DEPO 77-9241



TRIXI 77-9249 +
DEPO 77-9245




TRIXI 77-9249 +
DEPO 77-9243



TRIXI 77-9249 +
DEPO 77-9244

Trixi

Downlight Trimless Spot
Black and White Aluminium Body.

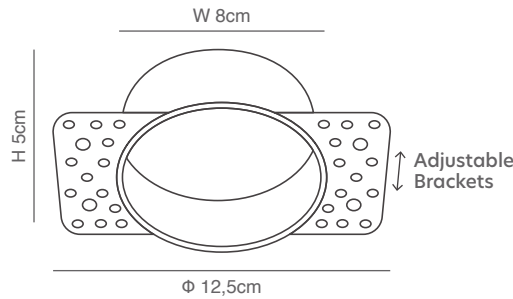

Trixi
Light Down
Led Gu10 1x5Watt
or COB 20Watt
3000k or 4000k

- Black
77-9248-5
- White
77-9249-5

Inside Cups Depo

Lighting Angle Can Be Adjusted 30°



Depo Black
77-9241-4



Depo White
77-9242-4



Depo Nickel
77-9243-5.50



Depo Gold
77-9243-5.50



Depo Copper
77-9244-5.50

Build In

First Step
Choose inside Cup Depo



Depo

Second Step
Choose COB or GU10



COB



GU10

Thirst Step
Choose the frame



Black



White


Complete





30° Anti Glare Shading Angle

Installation Steps

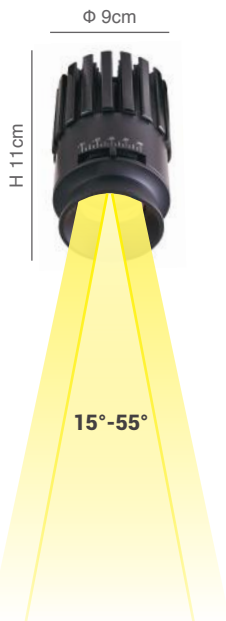

GUSTO
COB Zoomable
Led 20W, Black




77-9262-28
3000k

77-9263-28
4000k



KGP Triac Driver
77-50497-15
20Watt Dimmable
Un 220-240V
Uout max 55Vdc



Osram Driver
77-50496-11.50
20Watt Non Dimmable
Un 220-240V
Uout max 42Vdc

Customize Products

Create your own spotlight by combining the trixi with any inside cup cannon.



TRIXI 77-9248 +
CANNON 77-9246



TRIXI 77-9248 +
CANNON 77-9247




TRIXI 77-9249 +
CANNON 77-9246



TRIXI 77-9249 +
CANNON 77-9247

Trixi

Downlight Trimless Spot
Black and White Aluminium Body.

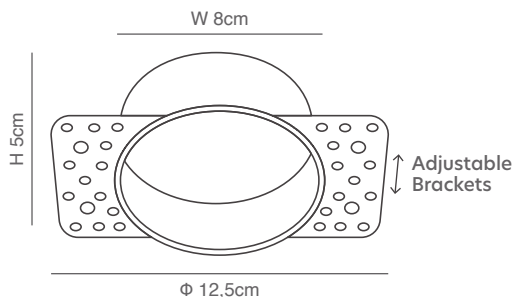

Trixi
Light Down
Led Gu10 1x5Watt
or COB 20Watt
3000k or 4000k

- Black
77-9248-5
- White
77-9249-5

Inside Cups Cannon


Lighting Angle Can Be Adjusted 30°



Cannon Black
77-9246-5



Cannon White
77-9247-5

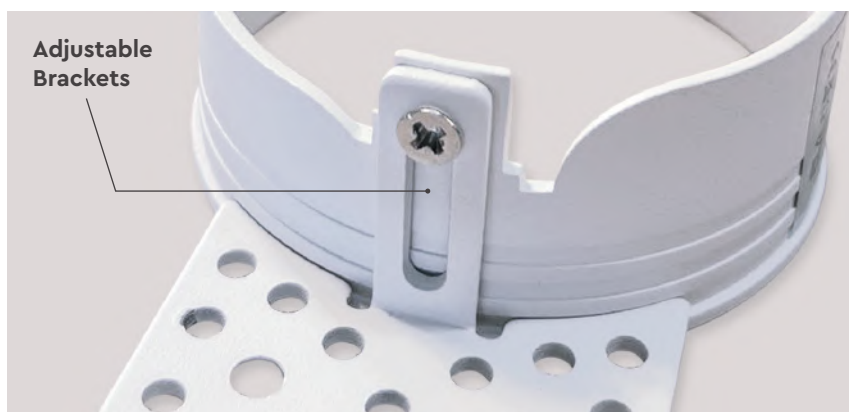

Build In

First Step
Choose inside Cup Cannon



Cannon

Second Step
Choose COB or GU10



COB

GU10

Thirst Step
Choose the frame



Black

White


Complete






Lighting Angle Can Be Adjusted 30°


Adjustable Angle




Vertical




To the left



To the right

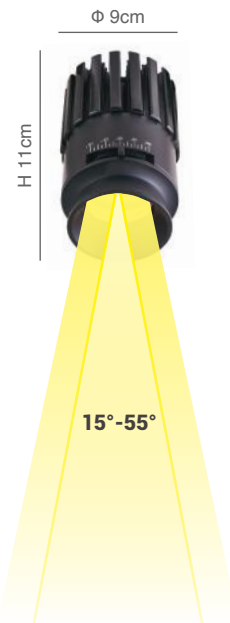

GUSTO
COB Zoomable
Led 20W, Black




77-9262-28
3000k

77-9263-28
4000k



KGP Triac Driver
77-50497-15
20Watt Dimmable
Un 220-240V
Uout max 55Vdc

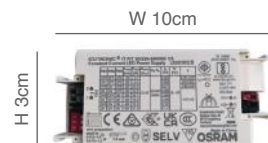


Osram Driver
77-50496-11.50
20Watt Non Dimmable
Un 220-240V
Uout max 42Vdc

Recessed-Ceiling



Mini Renno

Mini Renno Recessed or Ceiling Spot Led
Black and White Aluminium Body

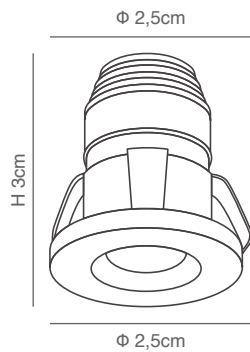

Movable Mavi

Movable Mavi Recessed or Ceiling
Spot Led Black and White Aluminium Body


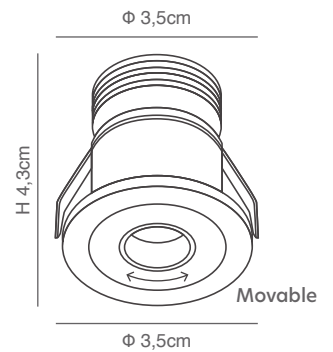


PHOTO	CODE	DESCRIPTION	DIMENSIONS	WATT	VOLT	LUMEN	CCT	CRI	IP	BEAM ANGLE	CUT OUT
	77-9250-9.50	Mini Renno Recessed or Ceiling Spot Black Aluminium Body	2,5x2,5x3cm	2W	220V 240V	140Lm	3000k	>90	20	35°	1,5cm
	77-9251-9.50	Mini Renno Recessed or Ceiling Spot Black Aluminium Body	2,5x2,5x3cm	2W	220V 240V	140Lm	4000k	>90	20	35°	1,5cm
	77-9252-9.50	Mini Renno Recessed or Ceiling Spot White Aluminium Body	2,5x2,5x3cm	2W	220V 240V	140Lm	3000k	>90	20	35°	1,5cm
	77-9253-9.50	Mini Renno Recessed or Ceiling Spot White Aluminium Body	2,5x2,5x3cm	2W	220V 240V	140Lm	4000k	>90	20	35°	1,5cm
	77-9254-12	Movable Mavi Recessed or Ceiling Spot Black Aluminium Body	3,5x3,5x4,3cm	2W	220V 240V	140Lm	3000k	>90	20	35°	2,5cm
	77-9255-12	Movable Mavi Recessed or Ceiling Spot Black Aluminium Body	3,5x3,5x4,3cm	2W	220V 240V	140Lm	4000k	>90	20	35°	2,5cm
	77-9254-12	Movable Mavi Recessed or Ceiling Spot White Aluminium Body	3,5x3,5x4,3cm	2W	220V 240V	140Lm	3000k	>90	20	35°	2,5cm
	77-9255-12	Movable Mavi Recessed or Ceiling Spot White Aluminium Body	3,5x3,5x4,3cm	2W	220V 240V	140Lm	4000k	>90	20	35°	2,5cm


Ceiling



Zoomable Joint

Zoomable and Movable Joint Ceiling Spot Led
Black and White Aluminium Body

3000k 4000k LED 2W F IP20 220V 240V
CRI >90 5 YEARS WARRANTY CE Included Driver

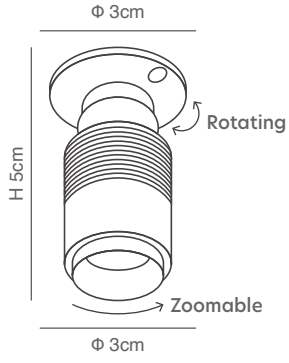

Beam Angle

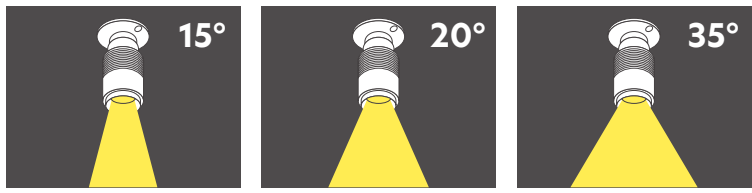


PHOTO	CODE	DESCRIPTION	DIMENSIONS	WATT	VOLT	LUMEN	CCT	CRI	IP	BEAM ANGLE
	77-9258-11	Zoomable Joint Ceiling Spot Black Aluminium Body	3x3x5cm	2W	220V 240V	140Lm	3000k	>90	20	15-35°
	77-9259-11	Zoomable Joint Ceiling Spot Black Aluminium Body	3x3x5cm	2W	220V 240V	140Lm	4000k	>90	20	15-35°
	77-9260-11	Zoomable Joint Ceiling Spot White Aluminium Body	3x3x5cm	2W	220V 240V	140Lm	3000k	>90	20	15-35°
	77-9261-11	Zoomable Joint Ceiling Spot White Aluminium Body	3x3x5cm	2W	220V 240V	140Lm	4000k	>90	20	15-35°

Available package of three of each item | The driver is included


Recessed Spot



Beem
77-50567-25


Beem

Downlight Recessed Spot LED
Black Aluminium Body

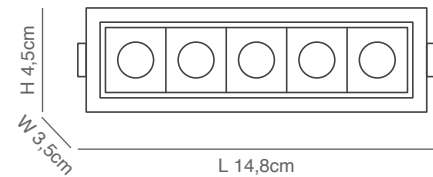


Anti-dazzle design

65° shading Angle, anti-glare index UGR-10

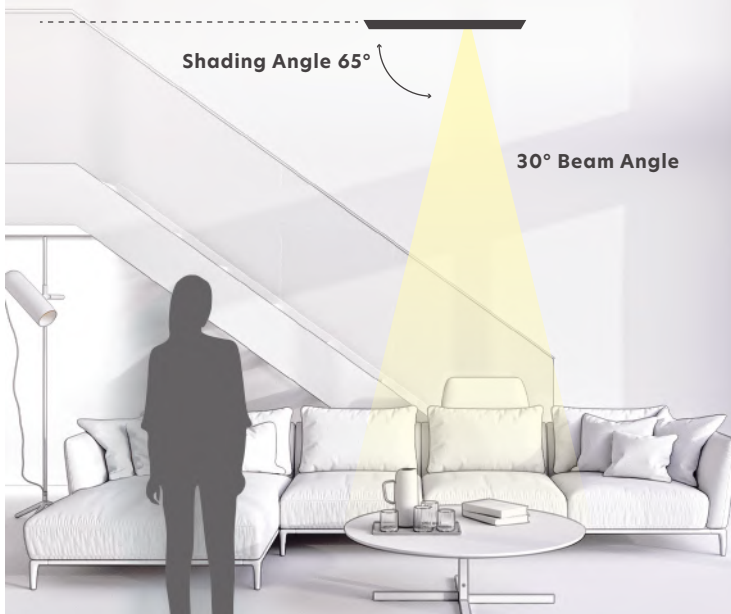



Gypsum Recessed Spot

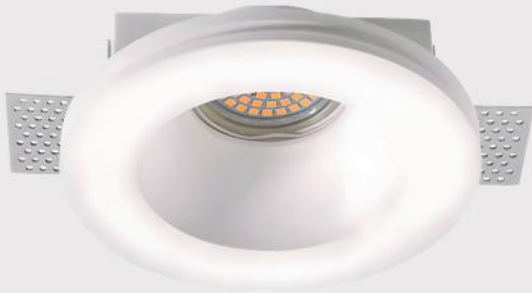

Yeso
77-9264-5



5
YEARS
WARRANTY

IP20



Yeso
77-9265-5

Yeso
Downlight Recessed Spot
White Gypsum Body
Led GU10 1X5 Watt

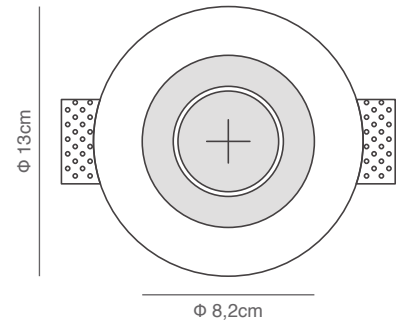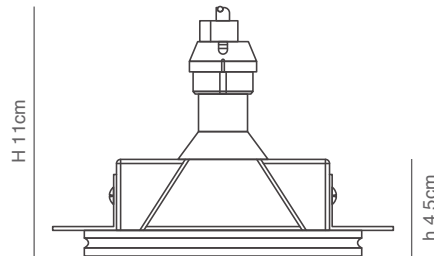

**Borderless Recessed
Gypsum Downlight**



Stainless Steel Fixed Mesh Plate



Easy Installation Bulb







Strips - Profiles

Silicone Tubes



LED STRIPS

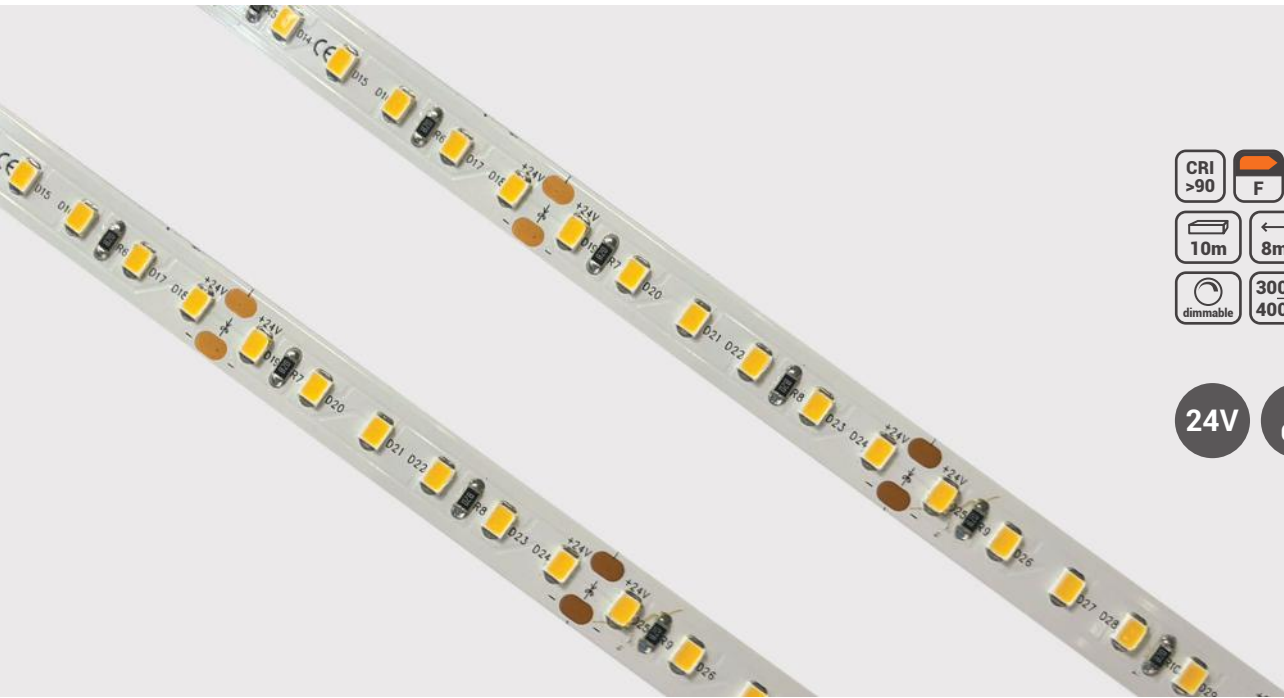


CODE	CCT	WATT	LUMEN/m	LUMEN/w
77-50509-5.20	3000k	6W/m	650Lm/m	106Lm/w
77-50510-5.20	4000k	6W/m	650Lm/m	106Lm/w
77-50511-5.20	3000k	10W/m	1040Lm/m	102Lm/w
77-50512-5.20	4000k	10W/m	1040Lm/m	102Lm/w

SPECIFICATIONS			
Operating Voltage	24Vdc	Ambient Temp Ta	-30° έως 50°C
Led Units	120Led/m	Dimension	10000x8x1,5(mm)
CRI	>90	Max Operating Length	20 meters
Led Beam Angle	120°	Dimming	PWM dimmable
Protection Glass	IP20	Rated Lifetime 25°C	50.0000hrs

For Dimming Use The Below



Dimensions/Cuts

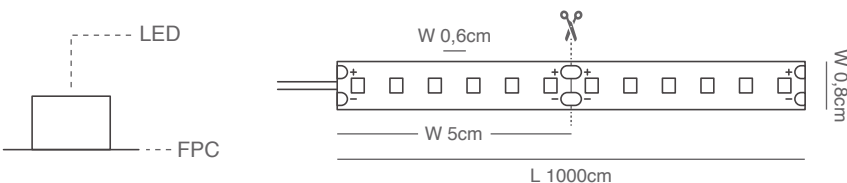

Power Connect For Led Strips
77-50672-0.15



Straight Connector For Led Strips
77-50673-0.15

LED STRIPS



CRI >90 **F** **IP20** **5 YEARS WARRANTY**
10m **10mm** **120 Chips/m** **Step <5**
dimmable **3000k** **4000k** **CE**

24V **18W**

CODE	CCT	WATT	LUMEN/m	LUMEN/w
77-50513-6.80	3000k	18W/m	1600Lm/m	95Lm/w
77-50514-6.80	4000k	18W/m	1600Lm/m	95Lm/w

SPECIFICATIONS			
Operating Voltage	24Vdc	Ambient Temp Ta	-30° έως 50°C
Led Units	120Led/m	Dimension	10000x10x1,5(mm)
CRI	>90	Max Operating Length	15 meters
Led Beam Angle	120°	Dimming	PWM dimmable
Protection Glass	IP20	Rated Lifetime 25°C	50.0000hrs

For Dimming Use The Below


MI-Light®
77-50551-7.20

MI-LIGHT Single Color LED Controller
77-50552-11.20

Master ON, Master OFF, Brightness+, Cooler White, Brightness-, 4x(un)Link Light, Warmer White, Zone ON, Zone OFF.



Dimensions/Cuts

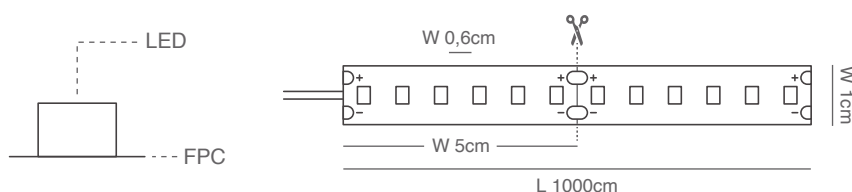

Power Connect For Led Strips
 77-50672-0.15



Straight Connector For Led Strips
 77-50673-0.15

PRICE PER METER


LED STRIPS COB




CODE	CCT	WATT	LUMEN/m	LUMEN/w
77-50515-4.40	3000k	10W/m	980Lm/m	95Lm/w
77-50516-4.40	4000k	10W/m	980Lm/m	95Lm/w

SPECIFICATIONS			
Operating Voltage	24Vdc	Ambient Temp Ta	-30° έως 50°C
Led Units	384Led/m	Dimension	10000x8x1,5(mm)
CRI	>90	Max Operating Length	10 meters
Led Beam Angle	120°	Dimming	PWM dimmable
Protection Glass	IP20	Rated Lifetime 25°C	30.0000hrs

For Dimming Use The Below

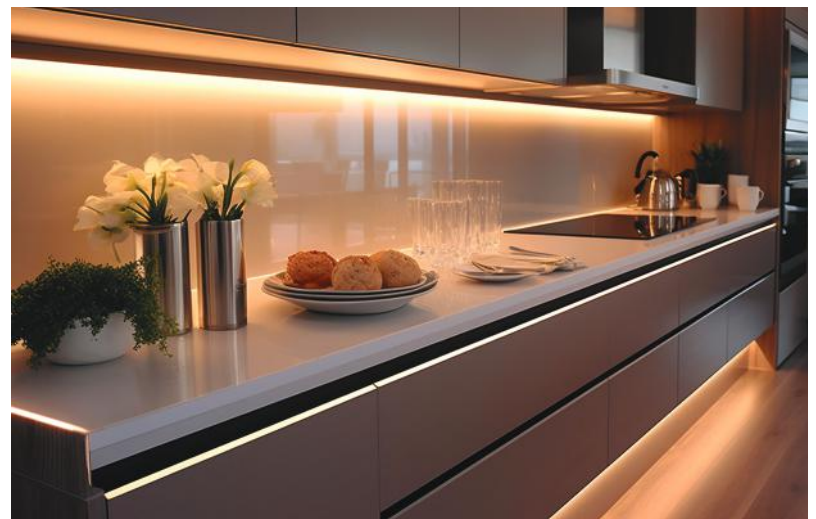

Dimensions/Cuts

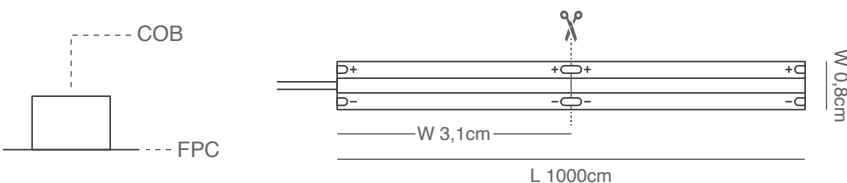

Power Connect For Led Strips
77-50672-0.15



Straight Connector For Led Strips
77-50673-0.15

LED STRIPS CHASING




CRI >90	F	IP20	3 YEARS WARRANTY
10m	8mm	120 Chips/m	Step <20
dimable	3000k 4000k	CE	

24V	10W
-----	-----

Many Patterns


Wireless Control Effects/Brightness

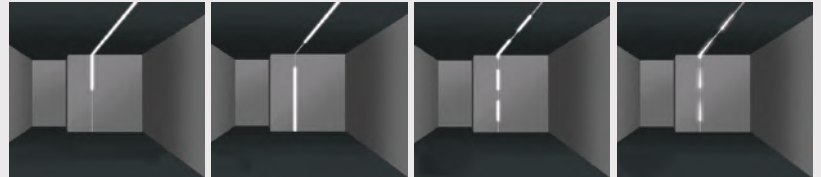

CODE	CCT	WATT	LUMEN/m	LUMEN/w
77-50517-4.80	3000k	10W/m	1000Lm/m	98Lm/w
77-50518-4.80	4000k	10W/m	1000Lm/m	98Lm/w

SPECIFICATIONS			
Operating Voltage	24Vdc	Ambient Temp Ta	-30° έως 50°C
Led Units	120Led/m	Dimension	10000x8x1,5(mm)
CRI	>90	Max Operating Length	8 meters
Led Beam Angle	120°	Dimming	PWM dimmable
Protection Glass	IP20	Rated Lifetime 25°C	30.0000hrs



Use It With The Switch

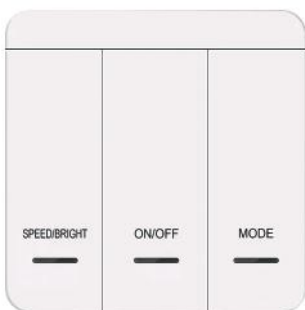

Switch With Battery
77-50571-6




Dimensions/Cuts

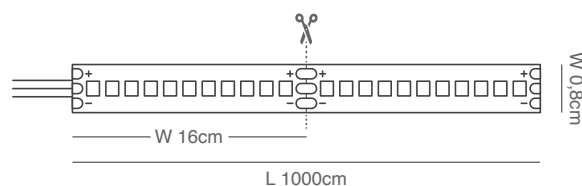

Straight Connector
For Led Strips
77-50673-0.15

PRICE PER METER


LED STRIPS CCT

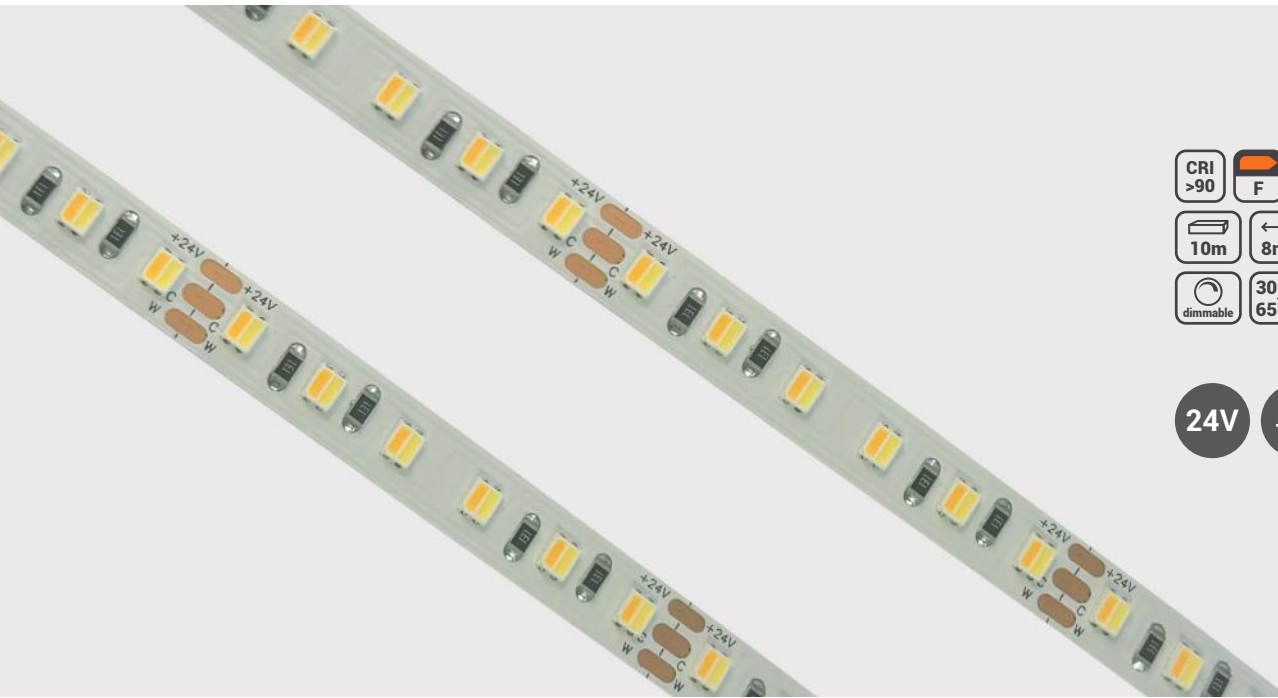

CODE	CCT	WATT	LUMEN/m	LUMEN/w
77-50519-6	3000k - 6500k	14W/m	1350Lm/m	95Lm/w

SPECIFICATIONS			
Operating Voltage	24Vdc	Ambient Temp Ta	-30° έως 50°C
Led Units	120Led/m	Dimension	10000x8x1,5(mm)
CRI	>90	Max Operating Length	10 meters
Led Beam Angle	120°	Dimming	PWM dimmable
Protection Glass	IP20	Rated Lifetime 25°C	30.0000hrs



Use It With

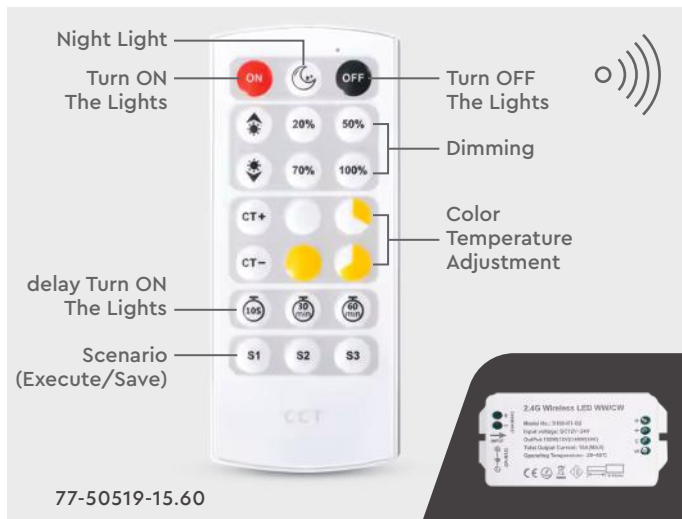

2.4G Wireless LED WW/CW Controller





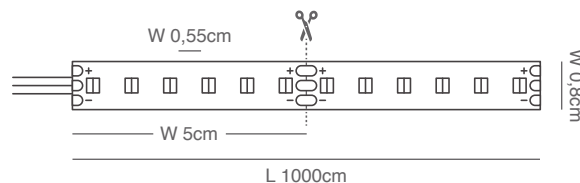

Dimensions/Cuts






Straight Connector For Led Strips
77-50673-0.15






DRIVERS 24V - 2 YEARS WARRANTY

PHOTO	CODE	WATT	VOLT	IP	WARRANTY	INPUT VOLT	Hz	A	DIMENSIONS	ON/OFF	DALI	TRIAC
	77-50526-8.80	60W	24V	20	2 YEARS	176-264V	50/60Hz	2,5A	12,5x3,5x2,3cm	✓		
	77-50527-10.40	100W	24V	20	2 YEARS	176-264V	50/60Hz	4,16A	14x5x2,7cm	✓		
	77-50528-11.60	200W	24V	20	2 YEARS	176-264V	50/60Hz	8,3A	18x5x2,7cm	✓		
	77-50529-13.20	300W	24V	20	2 YEARS	176-264V	50/60Hz	12,5A	19x6x3cm	✓		


DRIVERS 24V - 5 YEARS WARRANTY

PHOTO	CODE	WATT	VOLT	IP	WARRANTY	INPUT VOLT	Hz	A	DIMENSIONS	ON/OFF	DALI	TRIAC
	77-50499-13	40W	24V	20	5 YEARS	110-240V	50/60Hz	1,6A	13x3,5x2cm	✓		
	77-50500-14	60W	24V	20	5 YEARS	110-240V	50/60Hz	2,5A	17x3,5x2cm	✓		
	77-50501-24	100W	24V	20	5 YEARS	110-240V	50/60Hz	4,2A	14,5x5x3,5cm	✓		
	77-50502-28	150W	24V	20	5 YEARS	110-240V	50/60Hz	6,25A	18x5x3cm	✓		
	77-50524-28.80	200W	24V	20	5 YEARS	110-240V	50/60Hz	8,33A	19x5x3cm	✓		
	77-50503-40	300W	24V	20	5 YEARS	110-240V	50/60Hz	12,5A	26x5x3cm	✓		
	77-50504-50	400W	24V	20	5 YEARS	110-240V	50/60Hz	16,6A	28x5x3cm	✓		


DRIVERS 24V - 5 YEARS WARRANTY DIMMABLE

PHOTO	CODE	WATT	VOLT	IP	WARRANTY	INPUT VOLT	Hz	A	DIMENSIONS	ON/OFF	DALI	TRIAC
	77-50525-41.60	60W	24V	20	5 YEARS	170-260V	50/60Hz	2,5A	13,5x5x3cm			✓
	77-50505-50	100W	24V	20	5 YEARS	110-240V	50/60Hz	4,16A	16,5x5x3cm			✓
	77-50506-88	300W	24V	20	5 YEARS	110-240V	50/60Hz	12,5A	27,5x5x3cm			✓
	77-50507-68	100W	24V	20	5 YEARS	110-240V	50/60Hz	4,2A	25,5x5x3cm		✓	
	77-50508-100	300W	24V	20	5 YEARS	110-240V	50/60Hz	12,6A	28,5x5x3cm		✓	


Wiring Diagrams

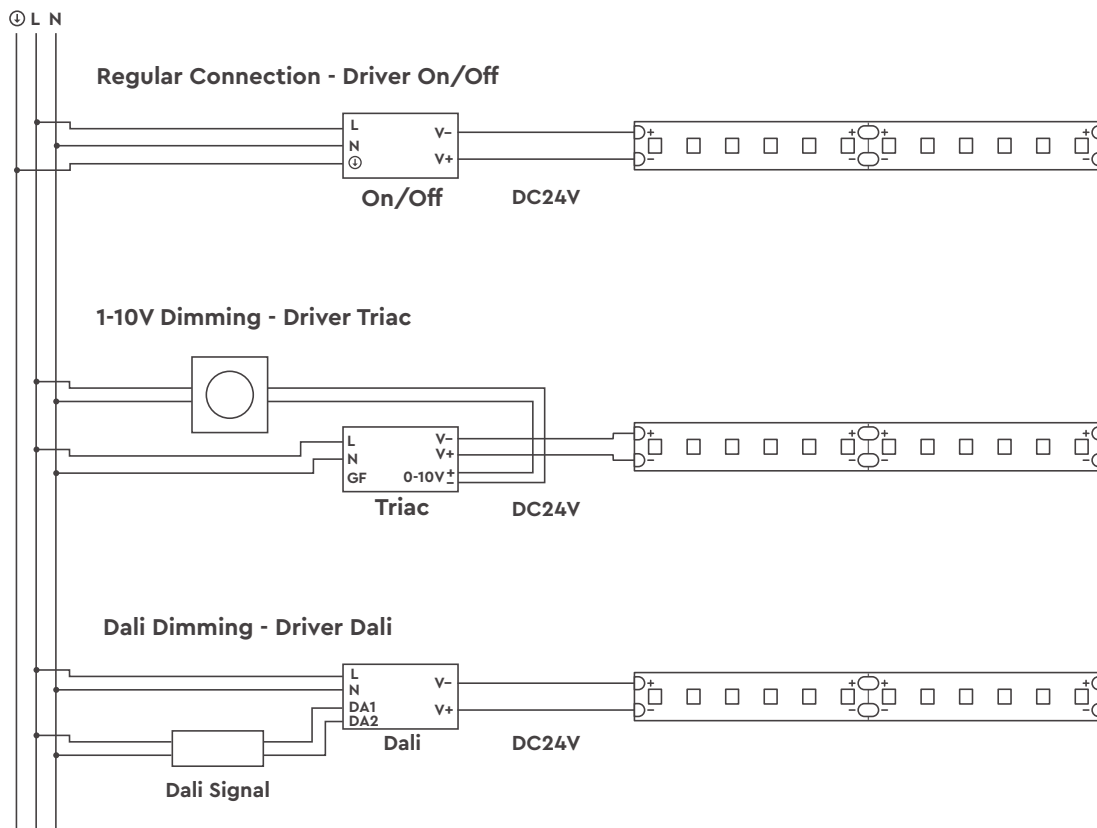

ALUMINIUM PROFILE

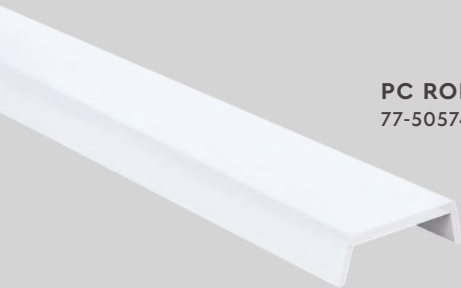

PC ROB OPAL
77-50574-0.90

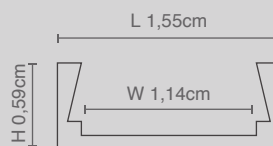

CAPS SET (2pcs)
77-50575-0.25




PROFILE ALUMINIUM Π
77-50573-1.45



CLIPS SET (2pcs)
77-50576-0.15




PROFILE ALUMINIUM RECESSED
77-50572-1.30

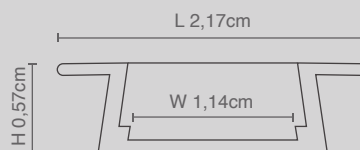

CAPS SET (2pcs)
77-50554-0.25



PC ROB OPAL
77-50555-0.90

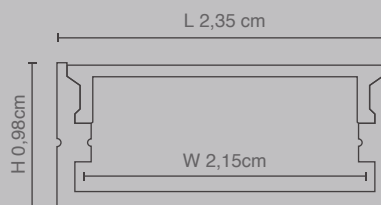

CAPS SET (2pcs)
77-50543-0.25




PROFILE ALUMINIUM Π
77-50542-1.20



CLIPS SET (2pcs)
77-50544-0.25




PROFILE ALUMINIUM RECESSED
77-50545-1.28

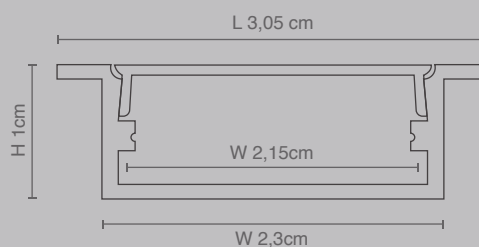

CAPS SET (2pcs)
77-50546-0.25


ALUMINIUM PROFILE TRIMLESS

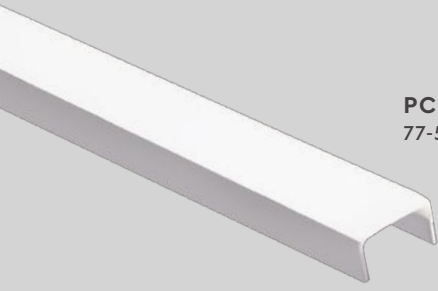

PC ROB OPAL
77-50548-1




PROFILE ALUMINIUM TRIMLESS
77-50547-5

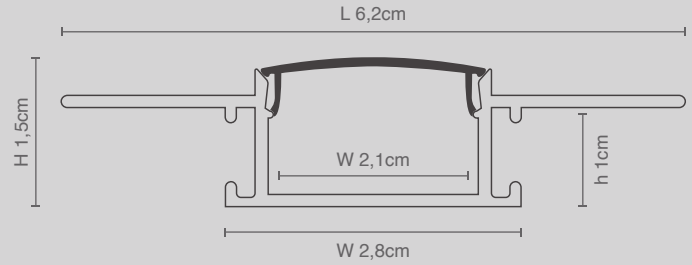


CAPS SET (2pcs)
77-50550-0.25


ALUMINIUM PROFILE FLEXIBLE TRIMLESS

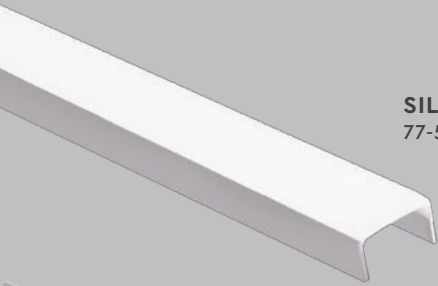


SILICONE ROB OPAL
77-50556-0.80

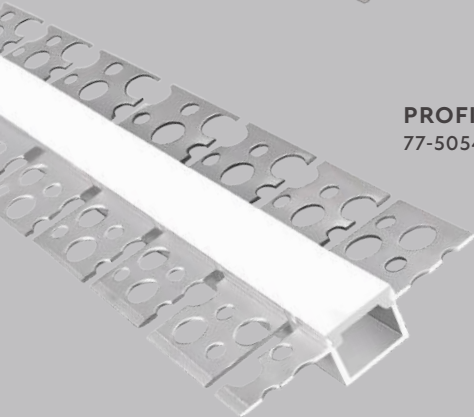


PROFILE FLEXIBLE TRIMLESS
77-50549-4

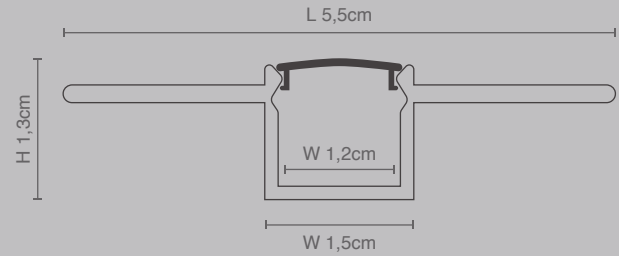

Instructions

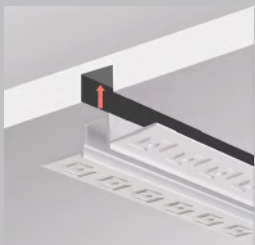

1. Place the aluminum groove into the already opened lamp groove

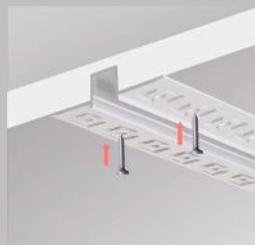

2. Tighten the screws to secure the aluminum groove



3. Cover the edge with anti crack mesh and apply putty flat



4. Apply wall paint



5. Attach and tighten the light strip and conduct a power on test



6. Test the lampshade on the rear cover



Silicone Tubes

D26MM



77-50533-10

∅ 2,6cm



Two Led Strips
Placed Opposite
Each Other

Accessories



Plastic Caps Set (2pcs)


77-50557-2.50



Plastic Clip

77-50534-0.4


20X10MM

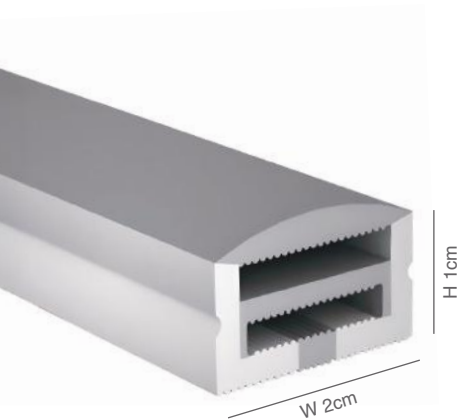

77-50539-2.80

H 1cm

W 2cm

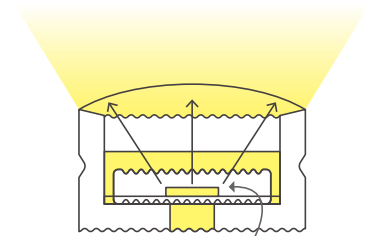

One Led Strip Inside

Accessories



Caps Set (2pcs)

77-50558-0.6



Clip

7-50559-0.50



Straight Clip

77-50541-2.40



Flexible Clip

77-50540-2.40

Instructions



Step 1: Attach the led strip traction wire inside the neon tube to the led strip wire.

Note: The wire must be tied firmly to avoid falling off.

Step 2: Insert the side of led bead of led strip inside of the card slot of neon tube.



Step 3: Then level the led strip and the neon tube, and start pulling the led strip slowly from the other side of the tube until the led strip is pulled to the other side of the neon tube.

Silicone Tubes

12X6MM



77-50539-2.80

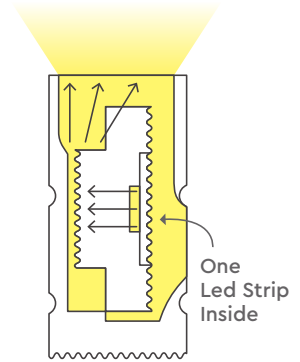

One Led Strip Inside

Accessories



Caps Set (2pcs)
77-50561-0.50




Straight Clip
77-50538-2




Flexible Clip
77-50537-2

12X12MM


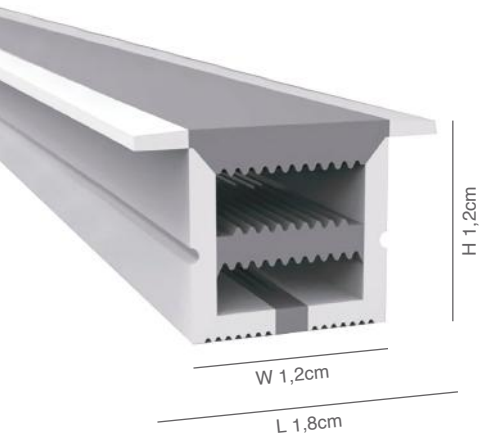


77-50535-1.60

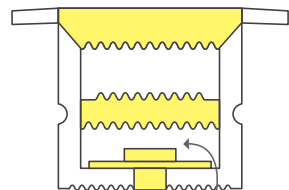

One Led Strip Inside

Instructions

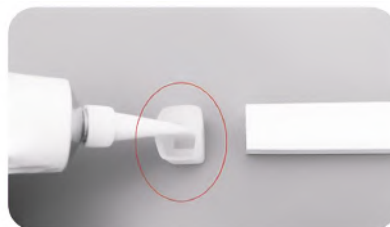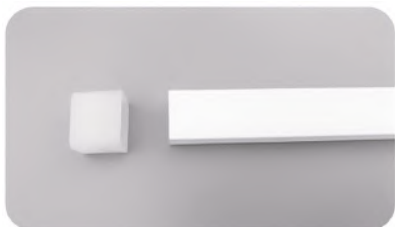

Step 4: Plug the neon tube end cap into the silicone and install it on the neon tube.

Note:

1. Glue to the right amount to ensure that the inner wall of the plug with the cover. The outer wall of the tube is fully bonded, if there is silica gel overflow, Wipe it off.

2. After the plug is installed, let it sit for hours. On top, or use a hot air blower to speed up the drying until the silicon. The neon tube can only be used after the glue is completely dried.

Wall Lights








Cubo
77-9271-25






Cubo

Led Wall lamp
Dark Grey Aluminium Body

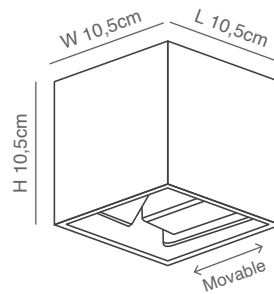

77-9271-25
Light Up-Down
LED 2x5Watt

Adjustable Beam Angle

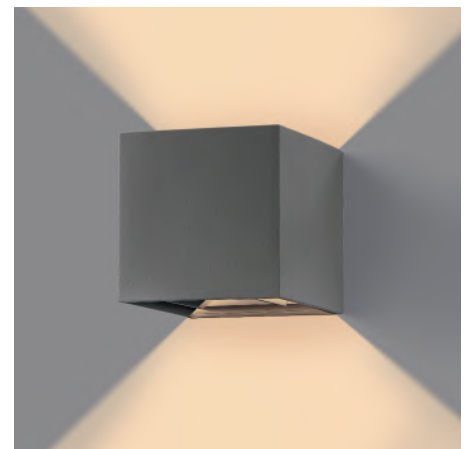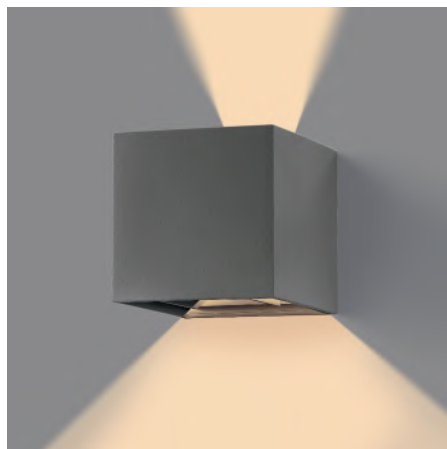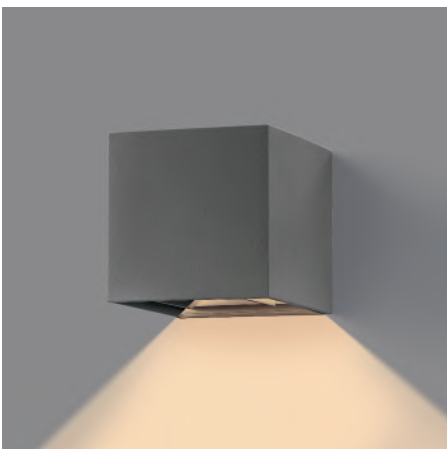





Cuadro
77-9269-9

5
YEARS
WARRANTY



IP65




Cuadro
77-9270-12

Cuadro

Wall Lamp
Dark Grey Aluminium Body



77-9269-9
Light Down
LED GU10 1x5Watt

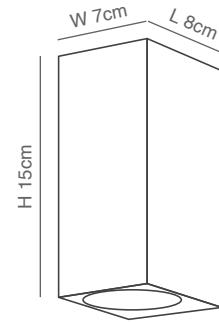










































77-9270-12
Light Up-Down
LED GU10 2x5Watt





SYMBOLS

	GR Εγγύηση Φωτιστικού EN Luminaire Warranty		GR Ντούι GU10 EN GU10
	GR Συσχετισμένη Θερμοκρασία Χρώματος (CCT, Kelvin) EN Correlated Color Temperature (CCT, Kelvin)		GR Ντούι PAR5.3 EN PAR5.3
	GR Ηλιακή Ανθεκτικότητα EN UV Resistant		GR Ντούι PAR111 EN PAR111
	GR Ανθεκτικότητα Φλόγας EN Flame Resistant		GR Περιλαμβάνεται Driver EN Included Driver
	GR Ανθεκτικότητα Νερού EN Water Resistant		GR Αντοχή Θερμοκρασίας EN Temperature Resistant
	GR Δεν Περιλαμβάνει Led Ταινία EN Led Strip Not Included		GR Φωτισμός Χωρίς Τρεμόπαιγμα EN Flicker Free Lighting
	GR Τάση Λειτουργίας 220-240V EN Output Supply 220-240V		GR Φιλικό στο Περιβάλλον EN Environmentally Friendly
	GR Τάση Λειτουργίας 24V EN Output supply 24V		GR Αντοχή στις Δονήσεις EN Vibration Resistant
	GR Τάση Λειτουργίας 48V EN Output Supply 48V		GR 16 Άμπερ EN 16 Amber
	GR Γωνία Δέσμης (μοίρες) 120° EN Light Beam Angle (degrees) 120°		GR Διάρκεια Ζωής EN Lifetime
	GR Γωνία Δέσμης (μοίρες) 15°-55° EN Light Beam Angle (degrees) 15°-55°		GR Πακέτο 10 μέτρα EN Packaging 10 meter
	GR Δείκτης Χρωματικής Απόδοσης EN Color Rendering Index		GR Πλάτος 8mm EN Width 8mm
	GR Ενεργειακή Κλάση F EN Energy Class F		GR Πιστοποίηση CE EN Certificate CE
	GR Ενεργειακή Κλάση G EN Energy Class G		GR Πιστοποίηση ENEC EN Certificate ENEC
	GR Βαθμός Στεγανότητας EN Ingress Protection		GR Εσωτερική Χρήση EN Inside Use
	GR Δεν περιλαμβάνεται λαμπτήρας EN Bulb not included		GR Διπλή Led Ταινία 8mm EN Double Led Strip 8mm
	GR Περιστροφή 360° (μοίρες) EN Rotation 360° (degrees)		GR Εύκαμπτο 360° (μοίρες) EN Bendable 360° (degrees)
	GR Δυνατότητα Ρύθμισης Φωτεινότητας EN Dimmable		GR Μέγιστη 10W Led Ταινία EN Max 10W Led Strip
	GR Μη δυνατότητα Ρύθμισης Φωτεινότητας EN Non Dimmable		GR Συντελεστής Ισχύος EN Power Factor
	GR Μαγνητική Ράγα EN Magnetic Tracklight		GR Lumen ανά Watt EN Lumen per Watt
	GR Δυνατότητα ρύθμισης μέσω εφαρμογής κινητού EN Remote control through smart phone application		GR Chips ανά μέτρο EN Chips per metter
	GR Δυνατότητα Ρύθμισης Συσχετισμένης Θερμοκρασίας Χρώματος (Kelvin) EN Adjustable Light Color Temperature (CCT, Kelvin)		GR Βήματα Μικρότερα από 20 EN Steps Smaller than 20

General Information

1. This catalogue cancels the previous one.
2. The products always travel at the risk of purchaser. Any claim for damage must be made by registration letter within 48 Hours of receipt of goods.
3. The products are being transferred in boxes, which are designed to ensure safe transportation. Customized packing is made for our special constructions.
4. Information and details, as shown in the present catalogue are indicative and in no way binding. Homelighting reserves the right, at any time and without notice, to modify and customize products in accordance with the CE standards.
5. The product pictures and ambiances in this catalogue can deviate from reality and they do not necessarily concur with the usual application of the product.
6. In every code 77-XXXX-XXX, the digits after the second dash are the price catalogue, from there you calculate your discount.
For example 77-8089-41, the price catalogue is 41 euros.
7. In the linear profiles, the numbers that are shown below the columns On/off, Dali and Triac are the price catalogue of the products.

For example:

MP61.70 CEILING BLACK							
STANDART WATT							
Length (cm)	Code On/off	Description Code	Watt	Lumen	On/off	Triac	Dali
59	77-9274-64	MP61.70C-059-S-3-O-OF-BL	12,6	1880	64	70	96

The price catalogue for the product with driver on/off is 64 euros, with Dali driver is 96 euros and with Triac is 70 euros. The 77-9274-64, corresponds for the On/off driver.

Γενικές Πληροφορίες

1. Αυτός ο κατάλογος ακυρώνει τον προηγούμενο.
2. Τα προϊόντα ταξιδεύουν με ευθύνη του παραλήπτη. Για οποιαδήποτε απαίτηση λόγω ζημιάς πρέπει να υποβληθεί επιστολή εντός 48 ωρών από την παραλαβή των εμπορευμάτων.
3. Τα προϊόντα ταξιδεύουν σε κουτιά τα οποία είναι σχεδιασμένα για να διασφαλίζουν την μεταφορά. Οι κατασκευές μεταφέρονται με ειδικό πακετάρισμα.
4. Πληροφορίες και λεπτομέρειες, όπως παρουσιάζονται στον κατάλογο είναι ενδεικτικές και σε καμία περίπτωση δεσμευτικές. Η Homelighting διατηρεί το δικαίωμα, ανά πάσα στιγμή και χωρίς προειδοποίηση, να τροποποιεί και να προσαρμόζει τα προϊόντα σύμφωνα με τα πρότυπα CE.
5. Οι εικόνες και η ατμόσφαιρα του προϊόντος μπορεί να αποκλίνουν από την πραγματικότητα και δεν συμφωνούν απαραίτητα με τη συνήθη εφαρμογή του προϊόντος.
6. Σε κάθε κωδικό που ξεκινάει με 77-XXXX-XXX, τα ψηφία μετά την δεύτερη παύλα είναι η τιμή καταλόγου, από αυτήν υπολογίζετε την έκπτωση σας.
7. Για παράδειγμα 77-8089-41, η τιμή καταλόγου είναι 41 ευρώ.
Τα γραμμικά προφίλ, οι αριθμοί που απεικονίζονται

Για παράδειγμα:

MP61.70 CEILING BLACK							
STANDART WATT							
Length (cm)	Code On/off	Description Code	Watt	Lumen	On/off	Triac	Dali
59	77-9274-64	MP61.70C-059-S-3-O-OF-BL	12,6	1880	64	70	96

Η τιμή καταλόγου για το προϊόν με μετασηματιστή On/off είναι 64 ευρώ, με Dali μετασηματιστή είναι 96 ευρώ και με Triac είναι 70 ευρώ. Ο κωδικός 77-9274-64, αντιστοιχεί στον On/off μετασηματιστή.

MASTER LIGHTING

Νέα Περιφερειακή Οδός Βέροιας
T.K. 59 100, Βέροια
Τηλ: 23310 62006
23310 71575
Fax: 23310 23769

New Ring Road of Veria
P.C. 59 100, Veria, Greece
Tel: +30 23310 62006
+30 23310 71575
Fax: +30 23310 23769

E-mail:
b2b@homelighting.gr
homelightingsales@gmail.com

www.homelighting.gr